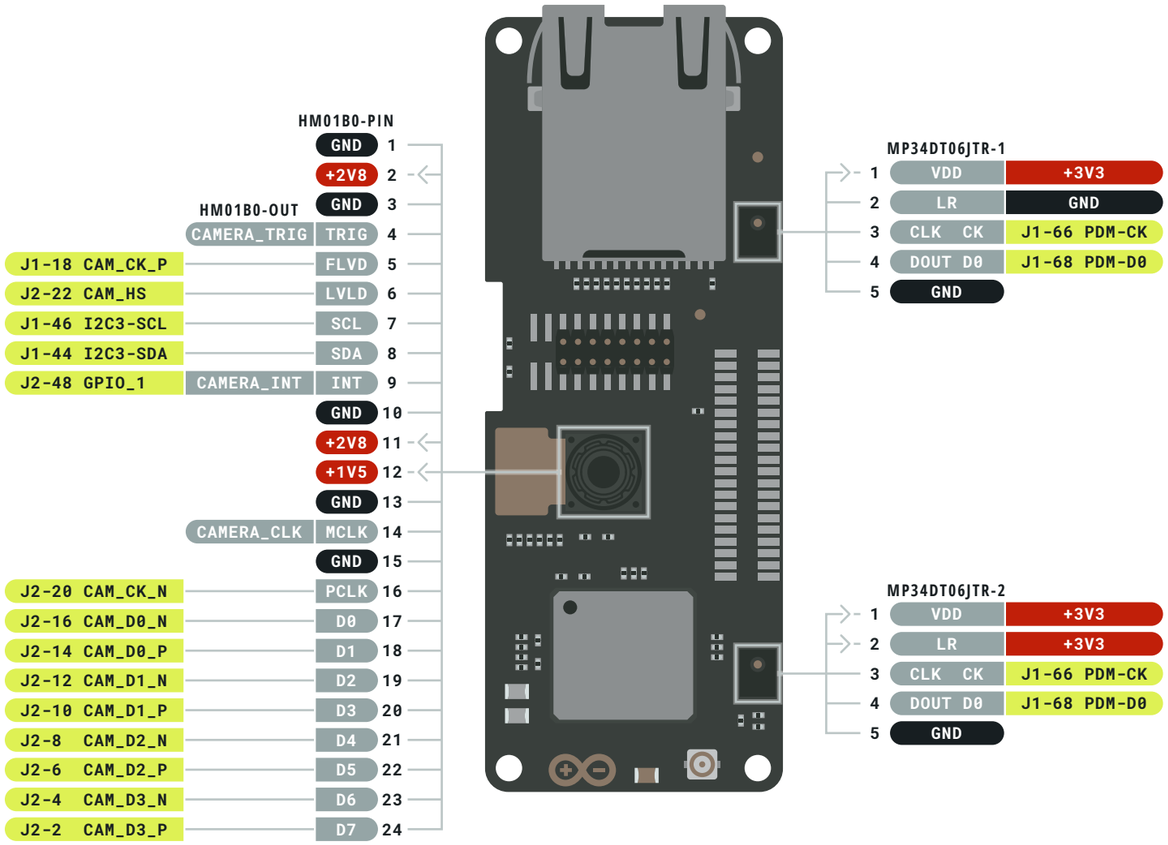



- Ground
- Power
- LED
- Internal Pin
- SWD Pin
- Digital Pin
- Analog Pin
- Other Pin
- Microcontroller's Port
- High Density Connector

POWER LIMITS
Depends on the Board used

NOTE: CIPO/COPI have previously been referred to as MISO/MOSI


This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit http://creativecommons.org/licenses/by-sa/4.0/ or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

The LoRa® connector is available only in the version with LoRa® Connectivity (ASX00026)

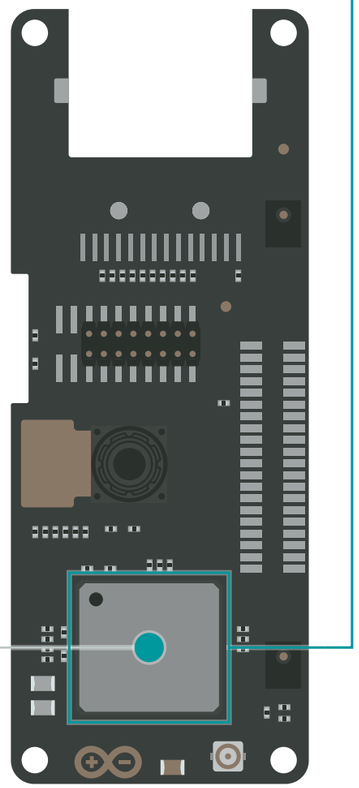

	CMWX1ZZABZ		
		VBUS +3V3	4
		VDD_MCU +3V3	5
		VREF +3V3	6
		COPI	14
		CIPO	15
		SCK	16
		SS	17
J2-67	IRQ	ADC/DACc	22
J2-25 UART8 TX	TX	UART RX	23
J2-27 UART8 RX	RX	UART TX	24
	ANT	ANT	26
J1-73 RESET	RST	MCU_NRST	34
J1-75 TMS/SWDIO		SWDIO	41
J1-77 TCK/SWCLK		SWCKL	42
J2-65	BOOT0	BOOT0	43

The Ethernet connector is available only in the version with Ethernet Connectivity (ASX00021)

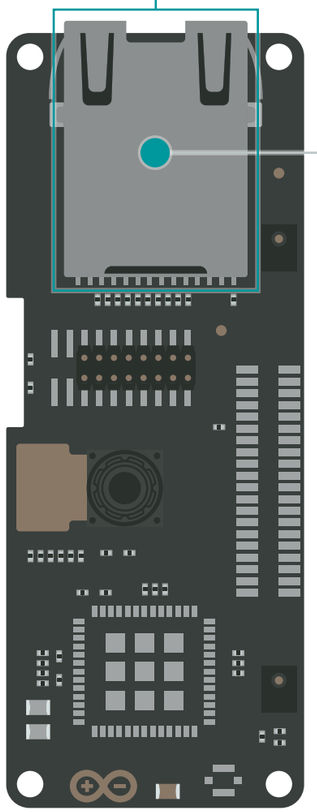

7498111120AR


1	LINK_P	
2	LINK_N	
3	D1_P	J1-1 ETH_A_P
4	D1_N	J1-3 ETH_A_N
5	D2_P	J1-5 ETH_B_P
6	D2_N	J1-7 ETH_B_N
7	D3_P	
8	D3_N	
9	D4_P	
10	D4_N	
11	VCC	J1-72 VCC
12	GND	
13	ACT_N	
14	ACT_P	


- Ground
- Power
- LED
- Internal Pin
- SWD Pin
- Digital Pin
- Analog Pin
- Other Pin
- Microcontroller's Port
- High Density Connector

POWER LIMITS
Depends on the Board used

NOTE: CIPO/COPI have previously been referred to as MISO/MOSI

This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit http://creativecommons.org/licenses/by-sa/4.0/ or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

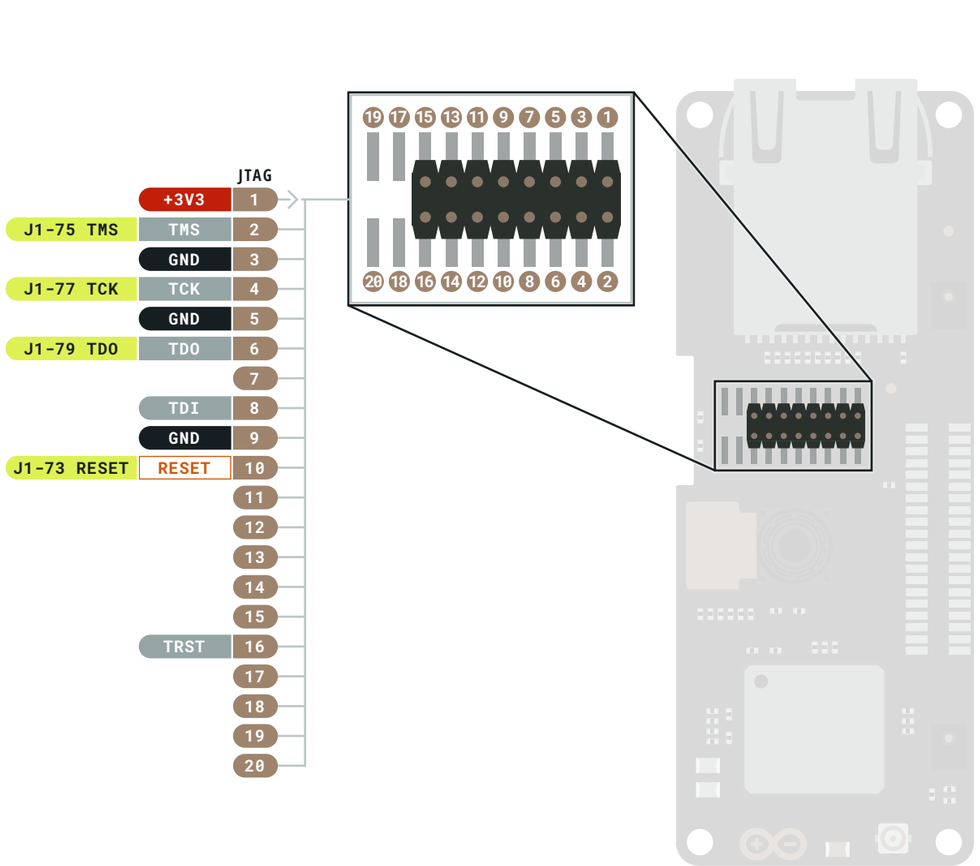

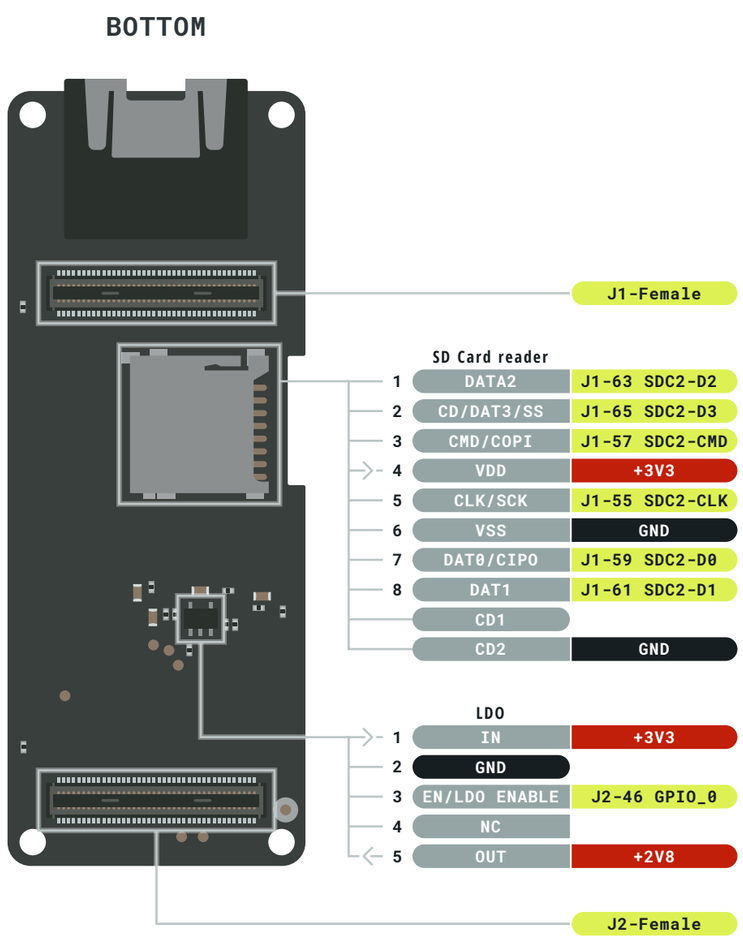

- Ground
- Power
- LED
- Internal Pin
- SWD Pin
- Digital Pin
- Analog Pin
- Other Pin
- Microcontroller's Port
- High Density Connector

POWER LIMITS
Depends on the Board used

NOTE: CIPO/COPI have previously been referred to as MISO/MOSI

This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit http://creativecommons.org/licenses/by-sa/4.0/ or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.


ARDUINO
PORTENTA VISION SHIELD

STORE.ARDUINO.CC/PORTENTA-VISION-SHIELD

J1-Female

SWO	79	80	
SWCK	77	78	
SWDIO	75	76	
RESET	73	74	
	71	72	V-SDCARD
	69	70	
	67	68	DMIC D0
SDC D3	65	66	DMIC CK
SDC D2	63	64	VSYS
SDC D1	61	62	I2S DO
SDC D0	59	60	I2S DI
SDC CMD	57	58	I2S WS
SDC CLK	55	56	I2S MCK
VSYS	53	54	GND
CAN1 RX	51	52	
CAN1 TX	49	50	
GND	47	48	VIN
I2C1 SD6	45	46	I2C0 SCL
I2C1 SDA	43	44	I2C0 SDA
VIN	41	42	GND
UART1 CTS	39	40	UART0 CTS
UART1 RTS	37	38	UART0 RTS
UART1 RX	35	36	UART0 RX
UART1 TX	33	34	UART0 TX
GND	31	32	VIN
USB1 ID	29	30	
USB1 D-	27	28	USB0 D-
USB1 D+	25	26	USB0 D+
USB1 VBUS	23	24	
VIN	21	22	GND
ETH L2	19	20	DSI CK-
ETH L1	17	18	DSI CK+
	15	16	DSI D0-
	13	14	DSI D0+
	11	12	DSI D1-
	9	10	DSI D1+
ETH B-	7	8	
ETH B+	5	6	
ETH A-	3	4	
ETH A+	1	2	

BOTTOM

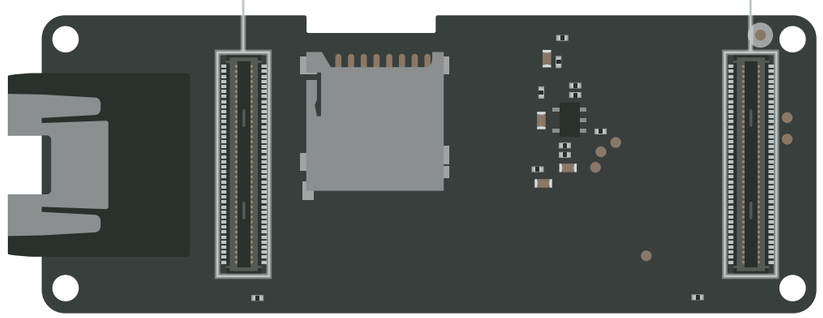

J2-Female

CAM D7	2	1	FORCE_BOOTLOADER
CAM D6	4	3	BOOT_SOURCE
CAM D5	6	5	POWER_ON_REQ
CAM D4	8	7	COINCELL
CAM D3	10	9	
CAM D2	12	11	
CAM D1	14	13	
CAM D0	16	15	
CAM VS	18	17	
CAM CLK	20	19	
CAM HS	22	21	
GND	24	23	VCC/+3V3
UART2 TX	26	25	UART3 TX
UART2 RX	28	27	UART3 RX
	30	29	
	32	31	
VCC	34	33	GND
SPI1 CS	36	35	
SPI1 CK	38	37	
SPI1 CIPO	40	39	
SPI1 COPI	42	41	
GND	44	43	VCC/+3V3
GPIO 0	46	45	I2C2 SDA
GPIO 1	48	47	I2C2 SCL
GPIO 2	50	49	SAI CK
GPIO 3	52	51	SAI FS
GPIO 4	54	53	SAI D0
GPIO 5	56	55	
GPIO 6	58	57	GND
PWM 5	60	59	PWM 0
PWM 6	62	61	PWM 1
PWM 7	64	63	PWM 2
PWM 8	66	65	PWM 3
PWM 9	68	67	PWM 4
GND	70	69	VCC/+3V3
ADC VREF-	72	71	ADC VREF+
ADC A4	74	73	ADC A0
ADC A5	76	75	ADC A1
ADC A6	78	77	ADC A2
ADC A7	80	79	ADC A3

- Ground
- Power
- LED
- Internal Pin
- SWD Pin
- Digital Pin
- Analog Pin
- Other Pin
- Microcontroller's Port
- High Density Connector

POWER LIMITS
Depends on the Board used

NOTE: CIPO/COPI have previously been referred to as MISO/MOSI

ARDUINO.CC

Last update: 22 Oct, 2026

This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit http://creativecommons.org/licenses/by-sa/4.0/ or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.