DENMARK BUSHFIRE BRIGADES WAERN RADIO USE

Common Radio Issues

And how to fix them: ensuring every message is heard.

Hear the examples
Scan the code, or visit
arkenamun.github.io/radio

1 Hum on the signal

Sounds like a steady low buzz under the voice.

Common cause: a handheld transmitting from its charger, indoors.

IF IT'S YOU

- Lift the handheld out of the charger.
- Step outside, clear of the building.

IF YOU HEAR IT

> **"Loud, distorted. Hum on your signal."**

Say "loud and clear" only when it is.

2 Two stations at once

Sounds like a warble or squeal. Neither caller is readable.

Happens after "any station?" and on a busy fireground.

IF IT'S YOU

- Listen before you transmit.
- No reply? You weren't heard. Call again.

IF YOU HEAR IT

> **"Two stations at once. Say again, one at a time."**


Don't let it pass. Important traffic may be lost.

Report what you hear

Say "clear" only when it is.

STRENGTH	Loud	Good	Weak	Very weak	Fading
READABILITY	Clear	Readable	Distorted	Interference	Unreadable

3 Radio shadow? Use Talk-Around

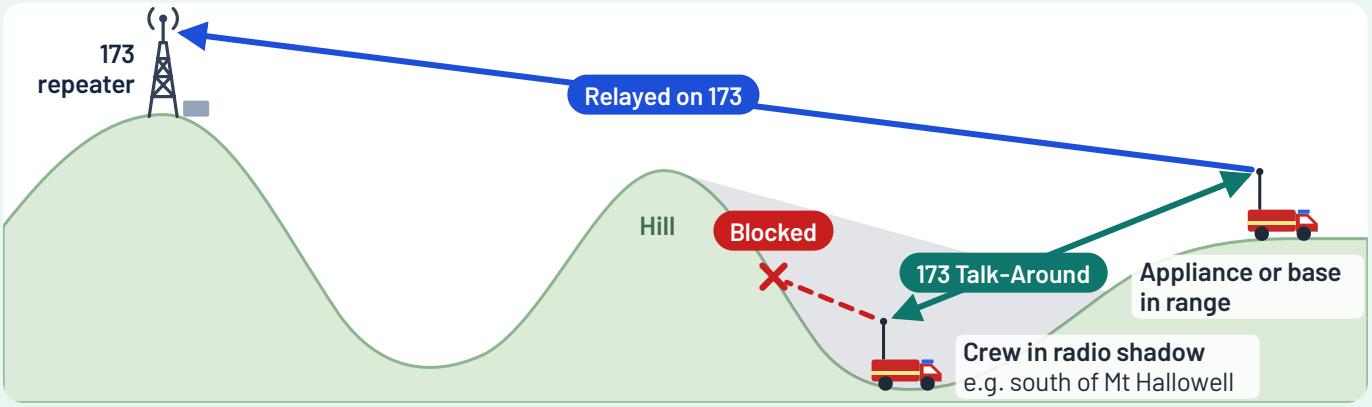

1. **No reply on 173?** You may be in a radio shadow.
2. **Switch to 173 Talk-Around** and call. Say you're on Talk-Around so they reply on it. Radios on 173 in range hear you direct.
3. **Whoever hears you** answers on Talk-Around, then relays on 173.
4. **Switch back to 173** once you're out of the shadow.

Terms follow the DFES Field Radio Operator manual.