


wr_en / wrdata timing - cmd +tphy_wrlat -> en , +tphy_wrdata -> data

WR0@0, WR1@13 (gap). wrlat=4, wrdata=2. en leads data by wrdata; both gap with spacing.

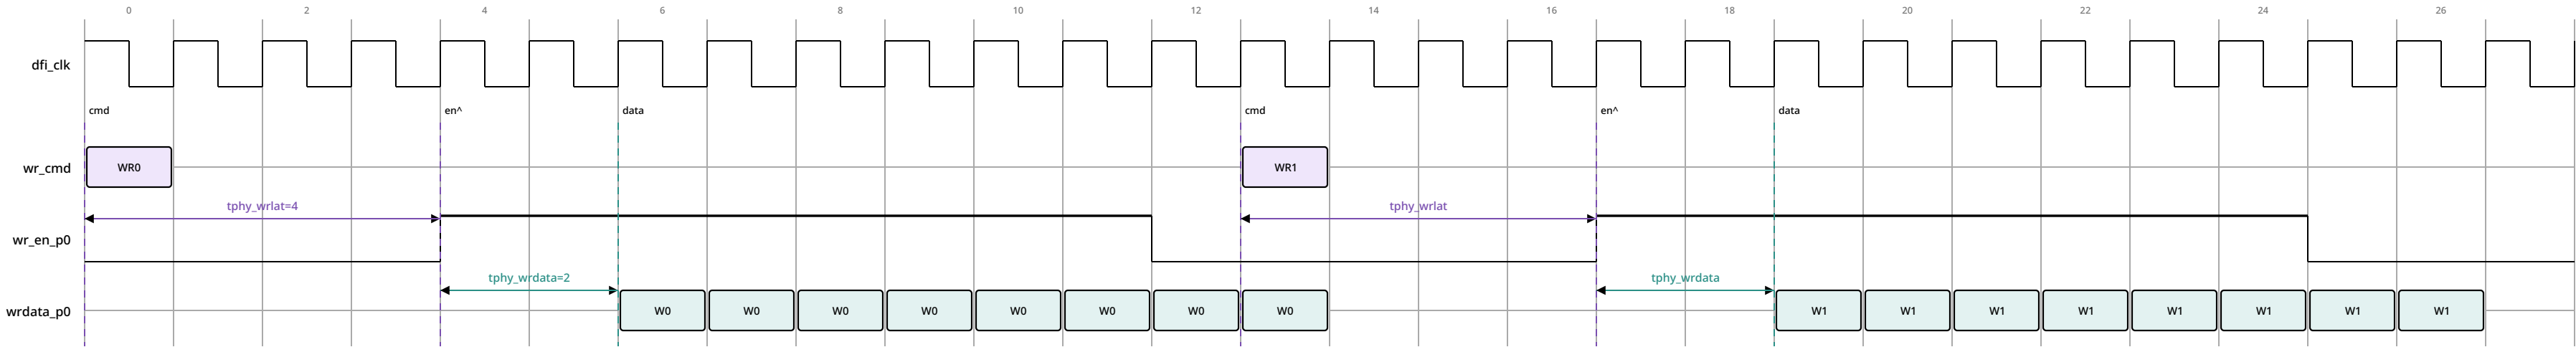

each write re-adds wrlat+wrdata from ITS OWN cmd (parallel pipes). en window and data window are both 8 CK; data = en delayed by wrdata. gap on cmd -> gap on en -> gap on data.