


3 WR back-to-back - SAME rank, diff-BG (PHY delays shown)


WR0/1/2 @ 0/8/16 rank0; cmd +tphy_wrlat -> en, +tphy_wrdata -> data

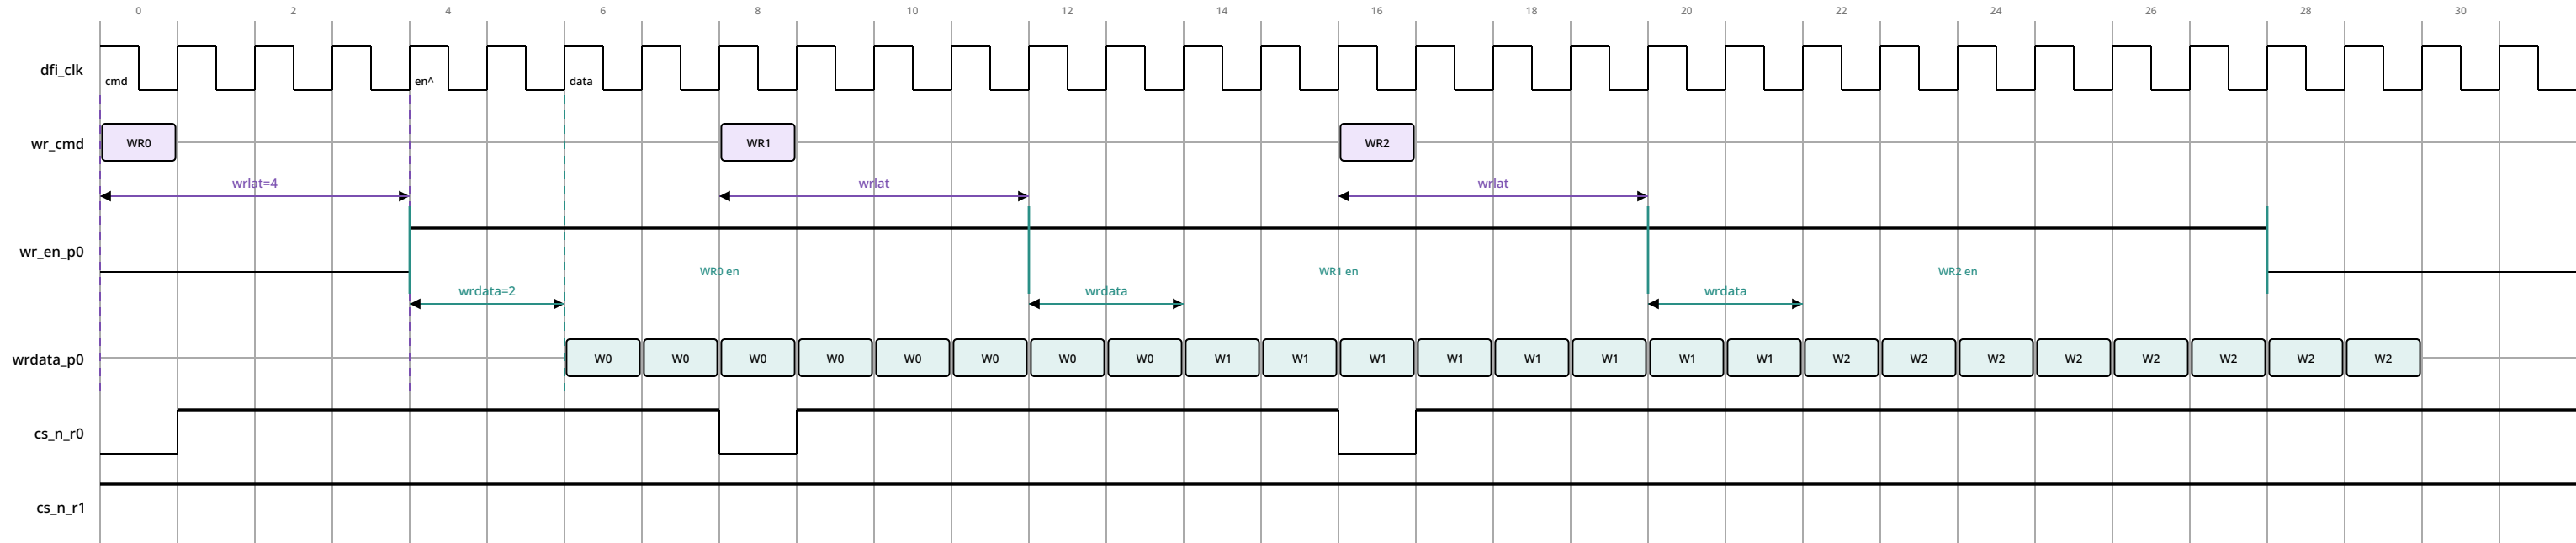

each write anchors its OWN wrlat/wrdata to its cmd. en windows = 8 CK, starts 8 apart (cyc 4/12/20) -> they ABUT at 12 & 20, never overlap (spacing 8 = burst 8).

3 WR back-to-back - CROSS rank (r0,r1,r0) (PHY delays shown)

WR0(r0)@0, WR1(r1)@8, WR2(r0)@16; SAME tphy all ranks -> identical hops + tiling

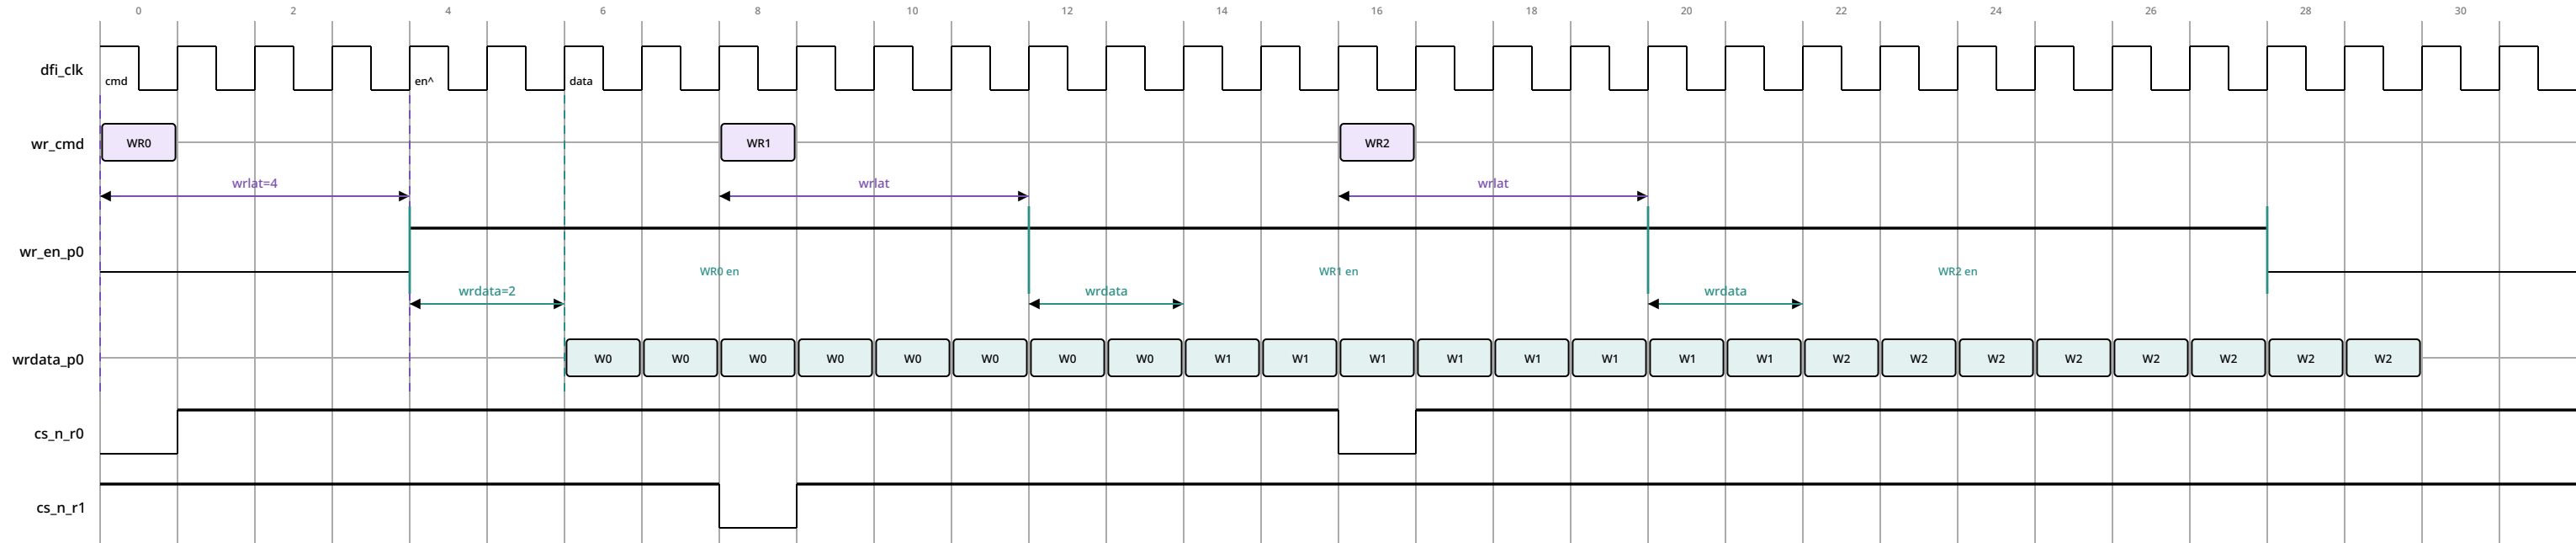

each write anchors its OWN wrlat/wrdata to its cmd. en windows = 8 CK, starts 8 apart (cyc 4/12/20) -> they ABUT at 12 & 20, never overlap (spacing 8 = burst 8).