

```

% Enter the Dropbox URL here. Make sure it has a =1 at the end:
url = 'https://www.dropbox.com/s/1rvjfef4jqybc12/ZiheGao_MZI2_271_Scan1.mat?
dl=1';
dL = 111.915; % [micron] Path length difference in the MZI

PORT=1; % Which Fibre array port is the output connected to?


a=websave('mzi.mat',url); % get data from Dropbox
load('mzi.mat');

% Data is stored in variable "scanResults".
% There are two columns - wavelength (1), and amplitude (2)
lambda=scanResults(1,PORT).Data(:,1)/1e9;
amplitude=scanResults(1,PORT).Data(:,2);


% Curve fit data to a polynomial for baseline correction
p=polyfit((lambda-mean(lambda))*1e6, amplitude, 4);
amplitude_baseline=polyval(p,(lambda-mean(lambda))*1e6);

% Perform baseline correction to flatten the spectrum
% Use the curve polynomial, and subtract from original data
amplitude_corrected = amplitude - amplitude_baseline;
amplitude_corrected = amplitude_corrected + max(amplitude_baseline) -
max(amplitude);
figure;
plot (lambda*1e6, amplitude_corrected);
xlabel ('Wavelength [\mu m]');
ylabel ('Transmission [dB]');
axis tight
title ('Experimental data (baseline corrected)');

```

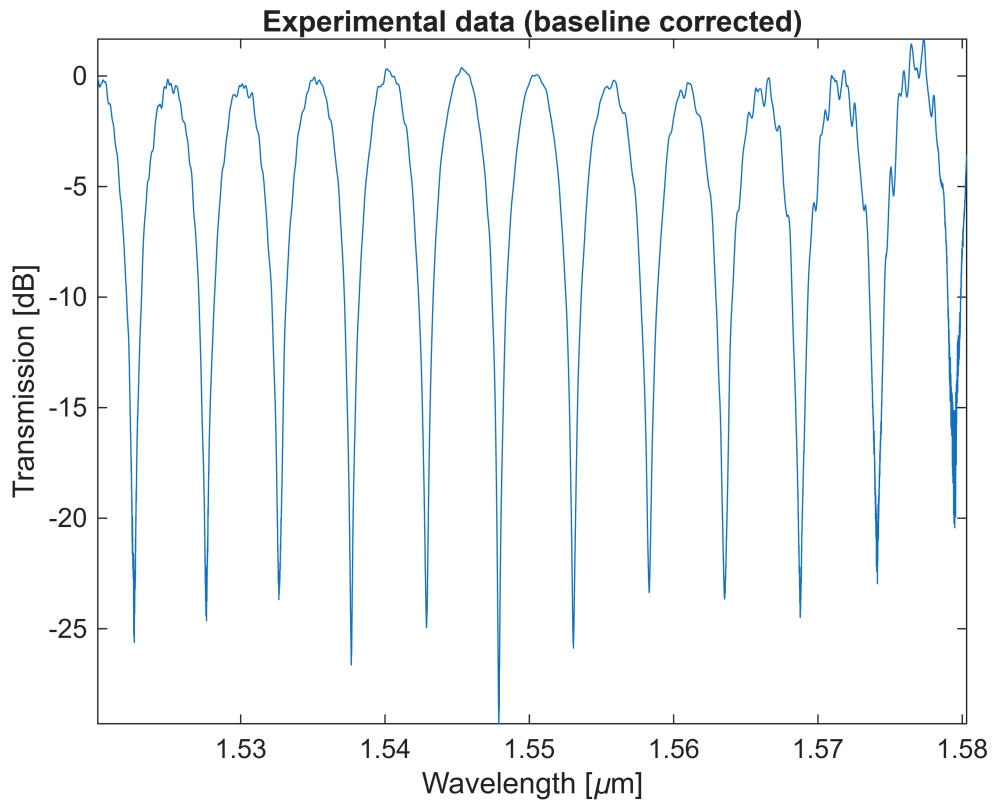

```
% data only within the wavelength range of interest.
lambda_min = min(lambda); % Can limit the analysis to a range of
wavelengths
lambda_max = max(lambda); % if the data on the edges is noisy
lambda_max = 1.57e-6;
lambda1=lambda_min:min(diff(lambda)):lambda_max;
amplitude=interp1(lambda, amplitude_corrected, lambda1,'linear');
lambda=lambda1;
amplitude(find(amplitude==-inf))=-50; % check if there are -infinity data
points
figure;
plot (lambda*1e6, amplitude);
xlabel ('Wavelength [\μm]');
ylabel ('Transmission [dB]');
axis tight
title ('Experimental data (baseline corrected, wavelength range)');
```

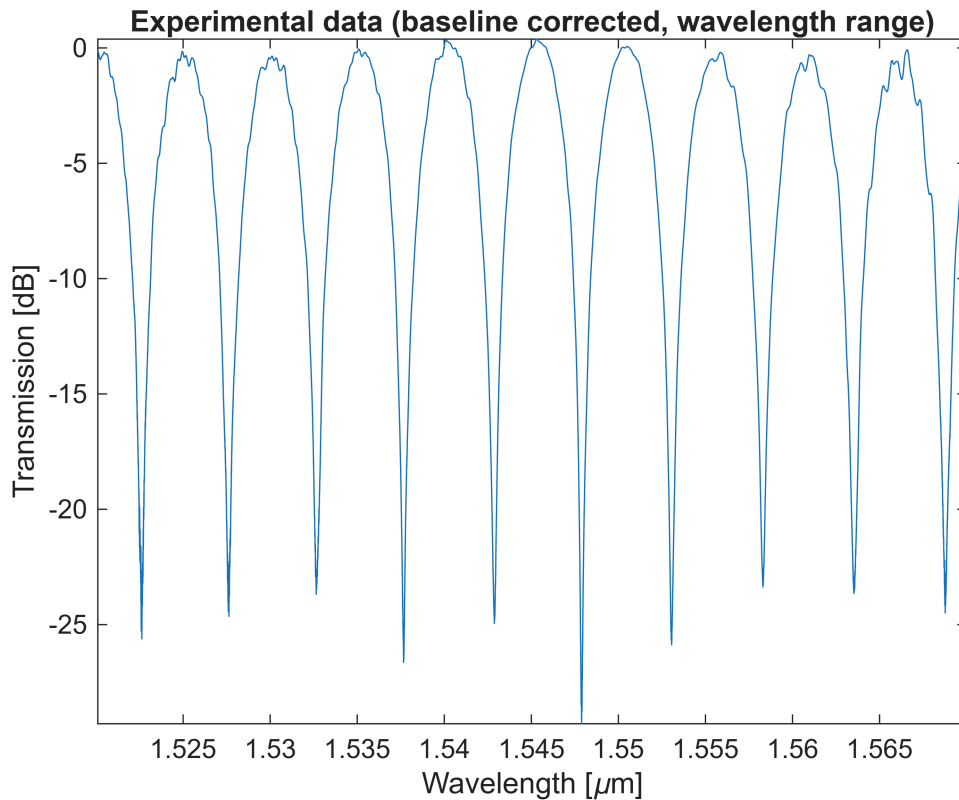


```
% Define the MZI transfer function
% - as a Taylor expansion around the central wavelength
% - Use units of [microns] - keeps the variables closer to 1.
% - These make the curve fitting easier.
lambda0 = mean(lambda)*1e6;
% use Matlab anonymous functions
% effective index:
neff = @(nx, lambda) ...
    (nx(1) + nx(2).*(lambda-lambda0) + nx(3).*(lambda-lambda0).^2);
% neff([2.4, -1, 0], 1.56) % test it.
% alpha = 1e-3; % propagation loss [micron^-1]
% complex propagation constant
beta = @(nx, alpha, lambda) ...
    (2*pi*neff(nx, lambda)./lambda - 1i*alpha/2*ones(1,length(lambda)) );
% beta([2.4, -1, 0], 1e-3, [1.56, 1.57]) % test it.
% MZI transfer function
T_MZI = @(X, lambda) ...
    (10*log10( 0.25* abs(1+exp(-1i*beta(X(1:3), X(4), lambda)*dL)).^2)
+X(5) );
% T_MZI([2.4, -1, 0, 1e-3], [1.56, 1.57]) % test it.

% initial function for fitting
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
nx_init = [2.38, -1, 0]; %%%%%%%%% CHANGE THE FIRST PARAMETER
```

```

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
alpha_init = 1e-3; % propagation loss [micron^-1]
x0=[nx_init, alpha_init, 0];
figure;
plot (lambda*1e6, amplitude);
hold all;
plot(lambda*1e6, T_MZI(x0, lambda*1e6),'LineWidth',3);
xlabel ('Wavelength [\mu m]');
ylabel ('Transmission [dB]');
axis tight
title ('MZI model (initial parameters)');

```

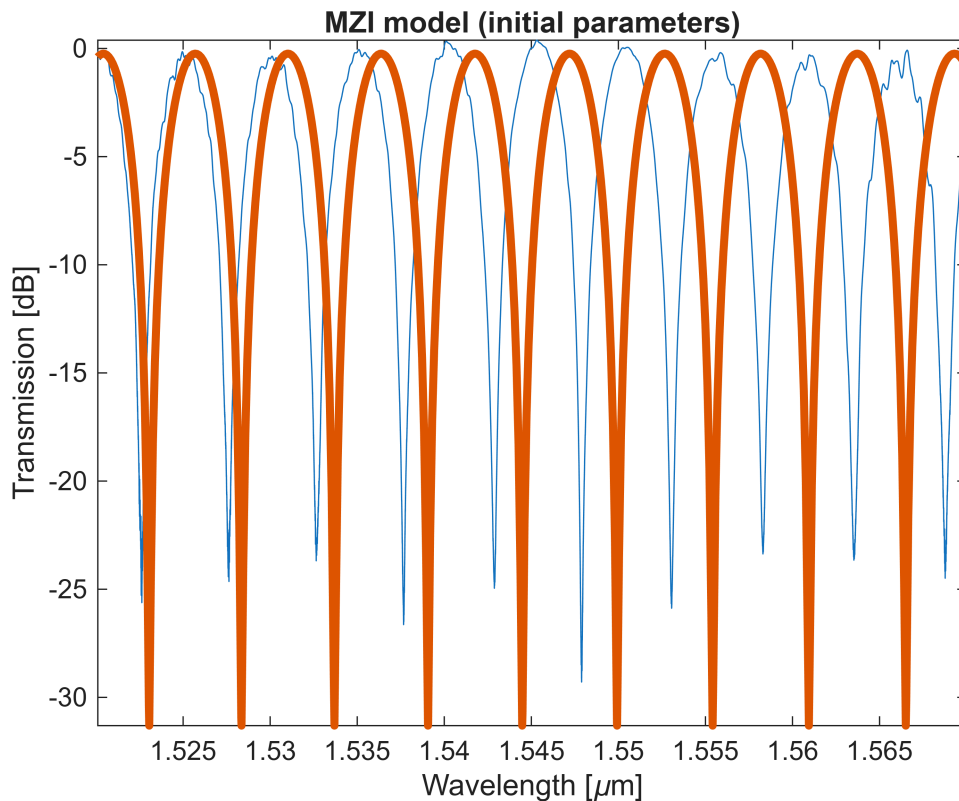

```

% Curve fit:
[xfit,resnorm] = lsqcurvefit(T_MZI,x0,lambda*1e6,amplitude);

```

Solver stopped prematurely.

lsqcurvefit stopped because it exceeded the function evaluation limit,
options.MaxFunctionEvaluations = 5.000000e+02.

xfit

```

xfit = 1×5
    2.3759    -0.9182    11.1400     0.0179     0.2213

```


```

r=corrcoef(amplitude,T_MZI(xfit, lambda*1e6));
r2=r(1,2).^2

```

```
r2 =
0.1965
```

```
figure;
plot(lambda*1e6, amplitude);
hold all;
plot(lambda*1e6, T_MZI(xfit, lambda*1e6), 'LineWidth',3);
xlabel ('Wavelength [\mu m]');
ylabel ('Transmission [dB]');
axis tight
title ('MZI model (fit parameters)');
```

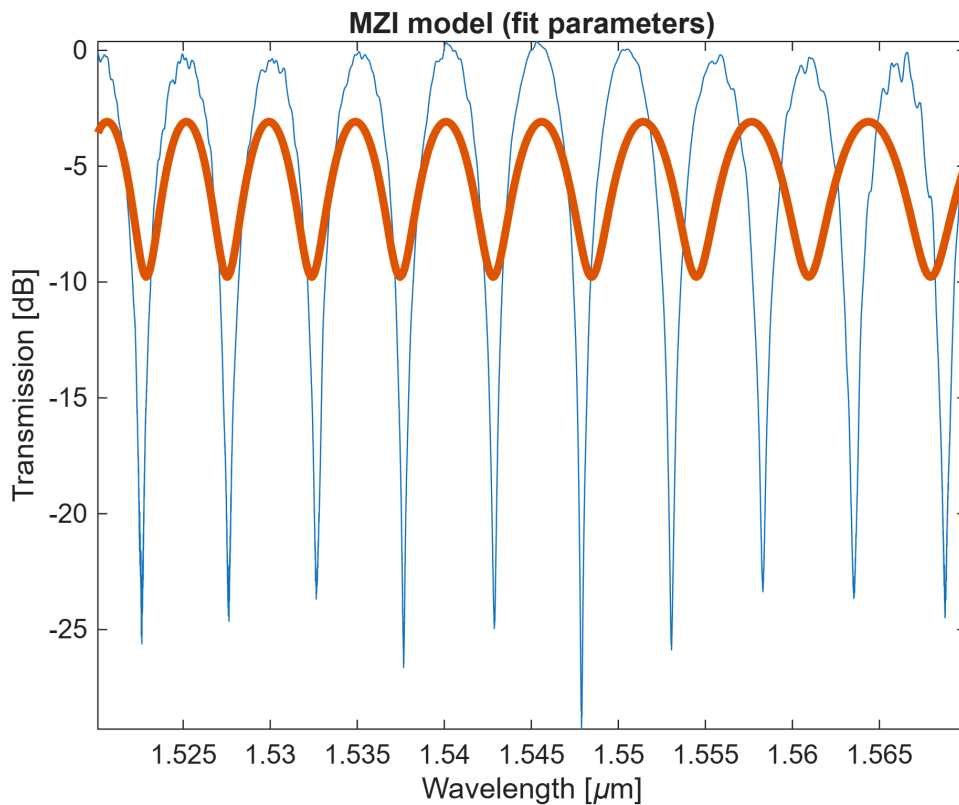

```
% Check if the fit is good. If so, find ng
if (ge(r2,0.8))
    % plot ng curve
    figure;
    neff_fit = neff(xfit(1:3),lambda*1e6);
    dndlambda=diff(neff_fit)./diff(lambda); dndlambda=[dndlambda,
dndlambda(end)];
    ng=(neff_fit - lambda .* dndlambda);
    plot(lambda*1e6, ng, 'LineWidth',4);
    xlabel ('Wavelength [\mu m]');
    ylabel ('Group index, n_g');
    axis tight
    title ('Group index (from MZI fit)');
```

```
% waveguide parameters at lambda0
ng0 = xfit(1) - lambda0*xfit(2)
end
```