



# Ulysses

AA.162.301111

# Specification

Part No.	AA.162.301111
Product Name	Ulysses Ultra-Low Profile Miniature Magnet Mounted GPS-GLONASS Antenna
Feature	1575MHz – 1610MHz 40mm*38mm*10mm 1.8-5.5V 3m RG174 SMA(M) IP67 Rated Custom cables and connectors available RoHS Compliant



### 1. Introduction

The Ulysses miniature super low profile (only 10mm in height) GNSS antenna is designed for applications which require high positioning accuracy by combining signals from GPS and GLONASS systems. A high gain wide-band patch antenna on an integral ground delivers reliable

performance. Fully IP67 waterproof rating allows use in outdoors environments. Front end SAW filter configuration eliminates potential LNA burn-out from nearby out of band radiated power bursts from other antennas that may be co-located nearby.

The antenna is manufactured to strict first tier Automotive quality controlled manufacturing process in TS16949 approved facility.

### 2. Specification

#### **Electrical**

Centre Frequency 1574~1610MHz

**Antenna Gain** 26 ± 3dBic @ Zenith @ 1575.42MHz

27 ± 3dBic @ Zenith @ 1602MHz

VSWR 2.0 max.

Impedance  $50\Omega$ 

Outer Band Attenuation1592±140MHz 15dB MinPout at 1dB Gain Compression Point-6dBm Min. -2dBm Typ.

**DC input** 1.8V (min.) 3.0V (typ.) 5.5V (max.)

 LNA Gain
 22dB
 28dB
 31dB

 Noise Figure
 2.6dB
 2.6dB
 2.9dB

 Power Consumption
 5mA
 10mA
 23mA

#### Mechanical

Antenna Dimensions 37.8 x 40.4 x 10mm

Housing Material UV Resistant ABS


Cable3M RG174 (fully customizable)ConnectorSMA(M) (fully customizable)

#### Environmental

Operation Temperature -40°C to 85°C
Storage Temperature -40°C to 105°C
Relative Humidity 40% to 95%




## 3. Antenna Block Diagram

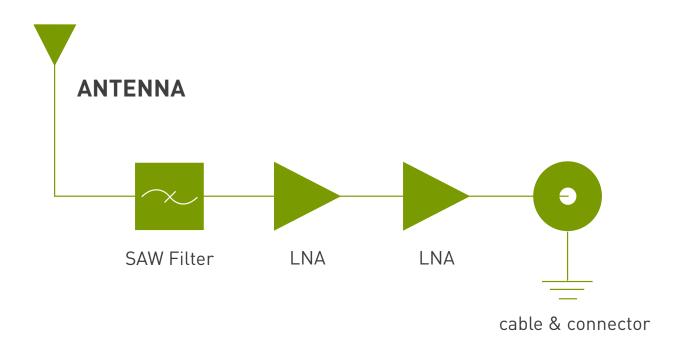



## 4. Antenna S11 Property

### 4.1 Return Loss

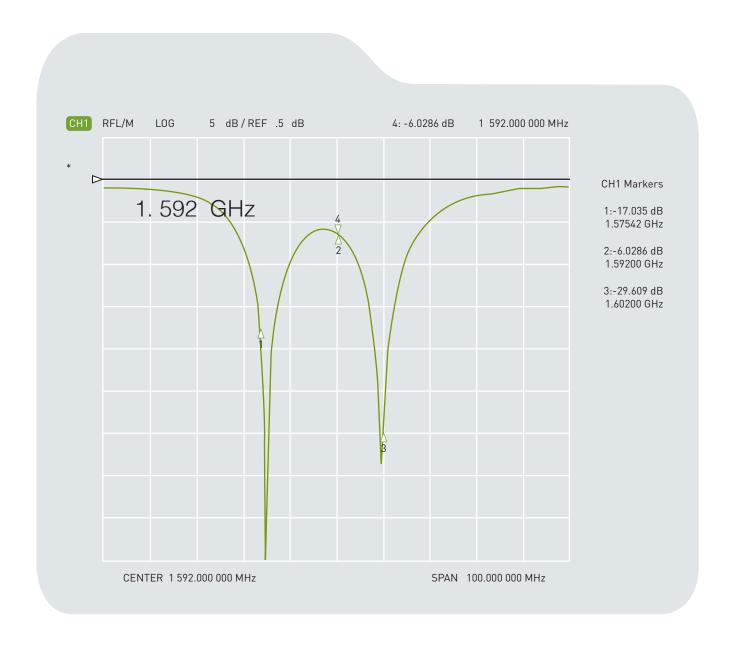


#### **Return Loss**

-17.03 dB @ 1575MHz

-29.60 dB @ 1602MHz



### 4.2 Impedance

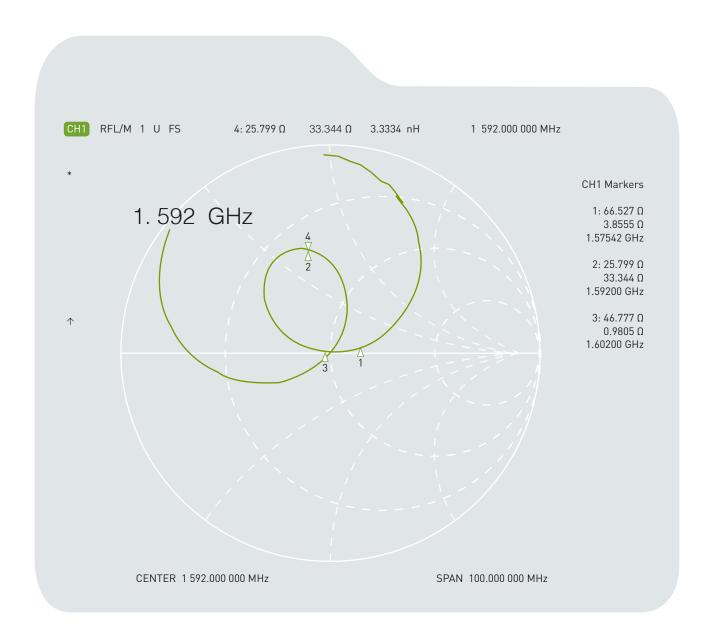


#### Impedance:

66.52 +j3.85 Ohm@ 1575MHz 46.77 +j0.98 Ohm@ 1602MHz



### **4.3 VSWR**

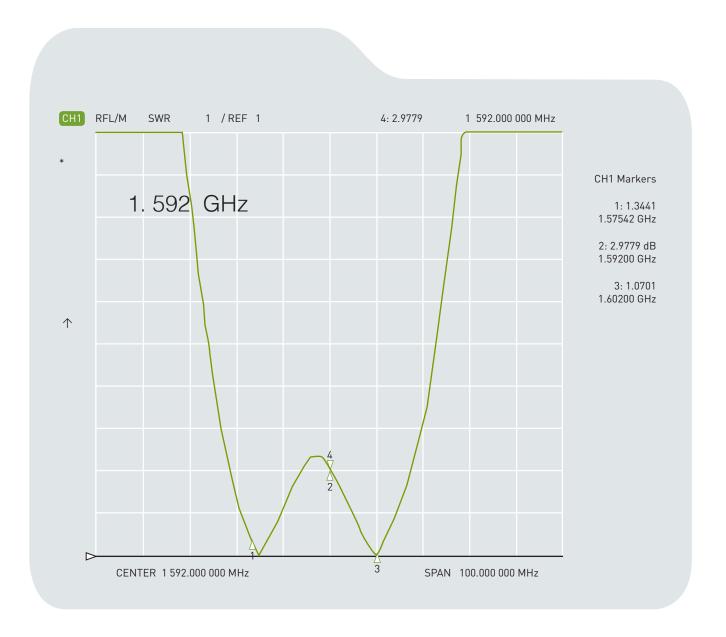


#### **VSWR**

1.34 @ 1575MHz 1.07 @ 1602MHz



### 5. Radiation Patterns


### **1575.42MHz XZ Plane**

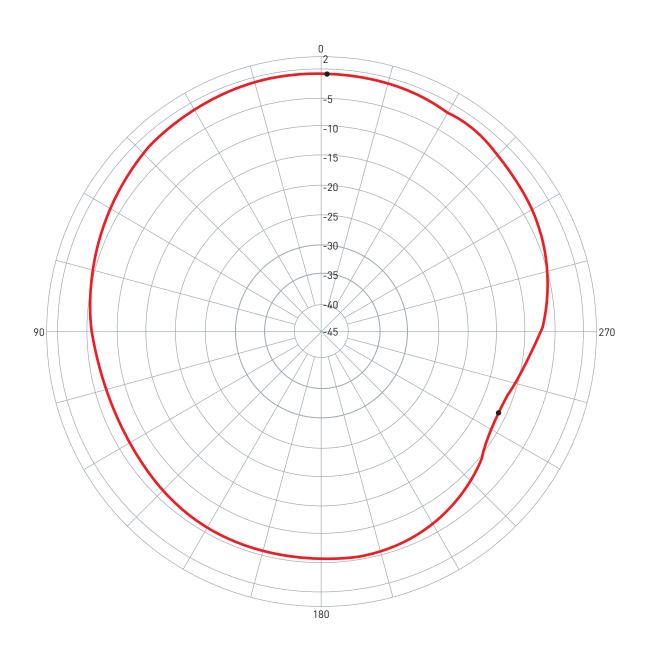

Pattern	Model No.	Test Mode	Freq (MHz)	Max Gain(dBi)	Min Gain(dBi)	Avg. Gain(dBi)	Source Polar.
1	AA.162.301111	XZ	1575.42	-0.69 / 359.00	-11.62 / 245.00	-4.12	V+H




### **1575.42MHz YZ Plane**

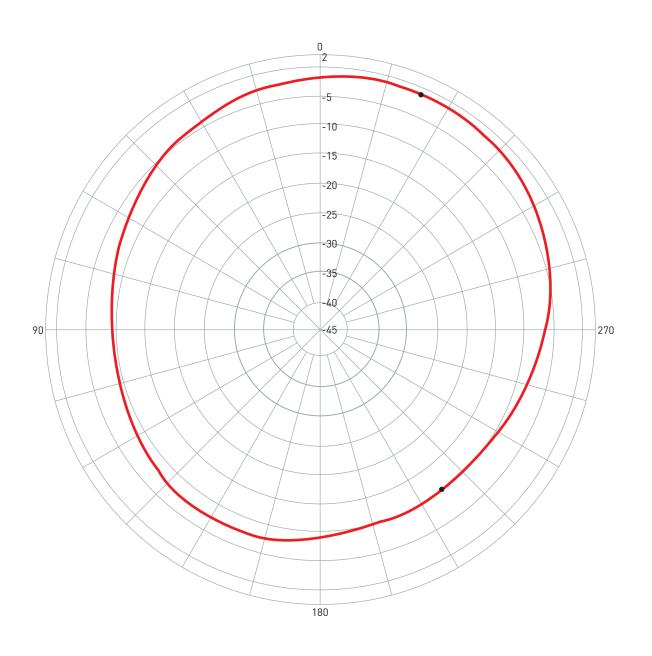






### 1602MHz XZ Plane

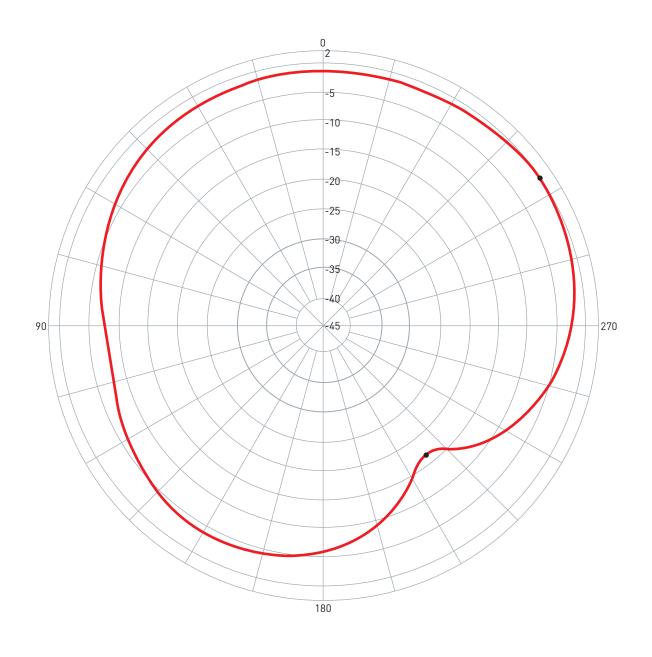






#### 1602MHz YZ Plane

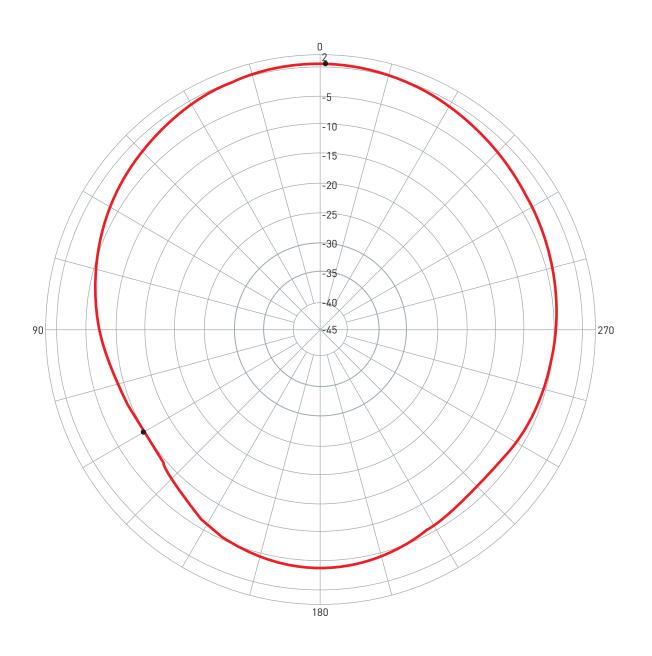





## 6. LNA Gain and Out Band Rejection @3.0V

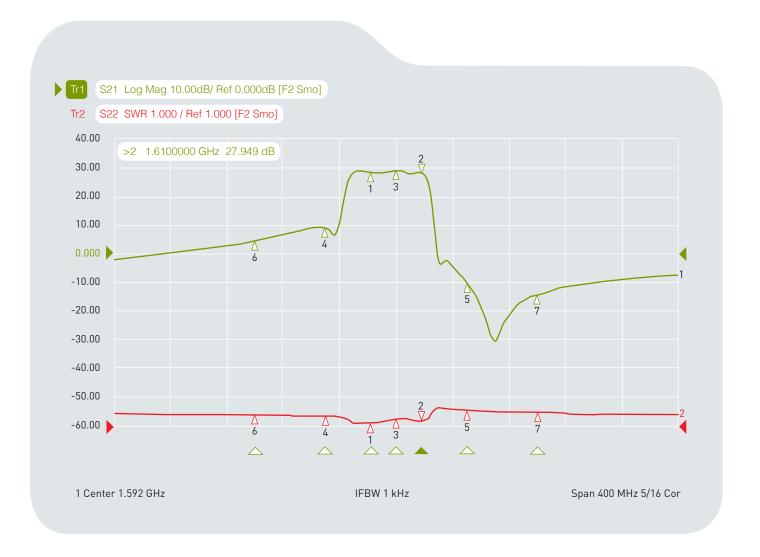

Ch1 Tr1	S21	1	1.5740000	GHz	28.186	dB
Ch1 Tr1	S21	>2	1.6100000	GHz	27.949	dB
Ch1 Tr1	S21	3	1.5920000	GHz	29.044	dB
Ch1 Tr1	S21	4	1.5420000	GHz	9.0245	dB
Ch1 Tr1	S21	5	1.6420000	GHz	-10.035	dB
Ch1 Tr1	S21	6	1.4920000	GHz	4.4105	dB
Ch1 Tr1	S21	7	1.6920000	GHz	-14.431	dB
Ch1 Tr2	S21	1	1.5740000	GHz	1.0816	
Ch1 Tr2	S21	2	1.6100000	GHz	1.1855	
Ch1 Tr2	S21	3	1.5920000	GHz	1.2488	
Ch1 Tr2	S21	4	1.5420000	GHz	1.3486	





## 7. LNA Noise Figure @3.0V






## 8. Drawing

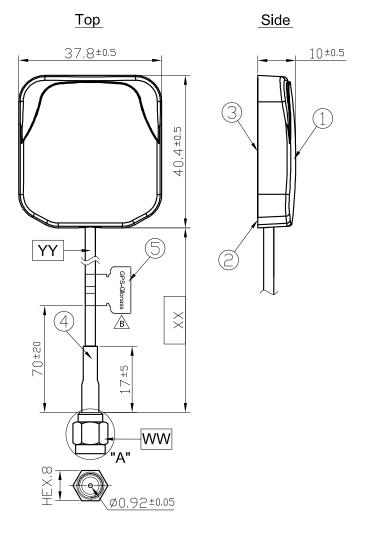



**Bottom** 




	Name	Material	Finish	QTY
1	AA.162 Antenna Housing Top	ABS	Black	1
2	AA.162 Antenna Housing Bottom	ABS	Black	1
3	AA.162 Sticker	Gloss Silver PET	Silver	1
4	Heat Shrink Tube	PE	Black	1
5	GPS-Glonass Label	Coated Paper	Orange	1
		1		

	Name	Material	Finish	QTY
WW	Connector Type	SMA(M) ST	Gold	1
XX	Cable Length	3000±50mm		1
YY	Cable Type	RG174	Black	1



## 9. Packaging

1pcs antenna per small PE bag 100pcs antennas per Box

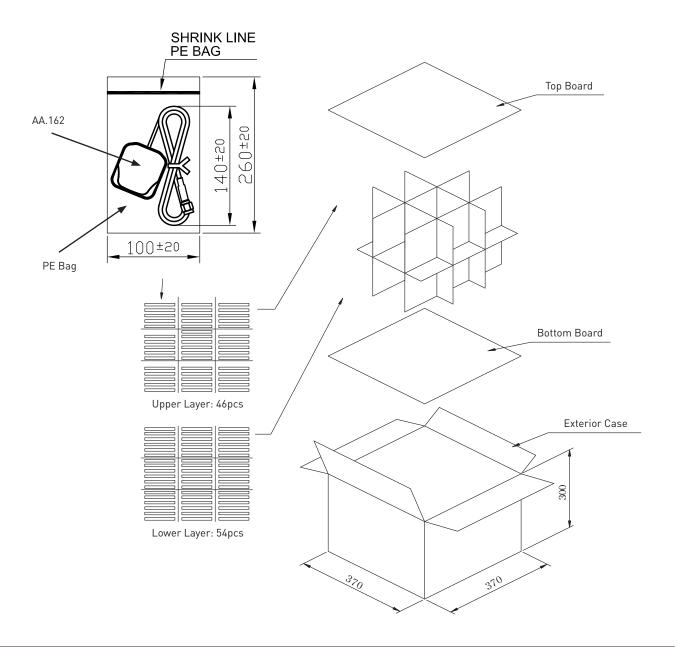

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and

product descriptions at any time without notice.

Taoglas reserves all rights to this document and the information

contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited. Copyright © Taoglas Ltd.