

WEIGHT: 42g (APPROX)

RE-280RA/SA

MABUCHI MOTOR

OUTPUT: $0.8W \sim 4.5W$ (APPROX)

金属ブラシ|Metal-brush motors|金属电刷

代表的用途 家電機器:マッサージャー/バイブレーター

玩具・模型:玩具/プラモデル


Typical Applications Home Appliances: Massager / Vibrator

Toys and Models: Motorized Toy / Motorized Plastic Model


主要用途 家电机器:按摩棒

玩具、模型:玩具、组合式模型

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL		
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	TORQUE		CURRENT
			r/min	А	r/min	А	mN⋅m	g∙cm	W	mN⋅m	g∙cm	А
RE-280RA-2865	1.5~3.0	3V CONSTANT	9200	0.16	7770	0.87	1.98	20.2	1.61	12.7	129	4.70
RE-280SA-2865	1.5~4.5	3V CONSTANT	7100	0.16	6000	0.88	2.58	26.3	1.62	16.7	170	4.80
RE-280SA-2295	3~6	6V CONSTANT	9600	0.14	8150	0.78	3.27	33.3	2.79	21.6	220	4.40

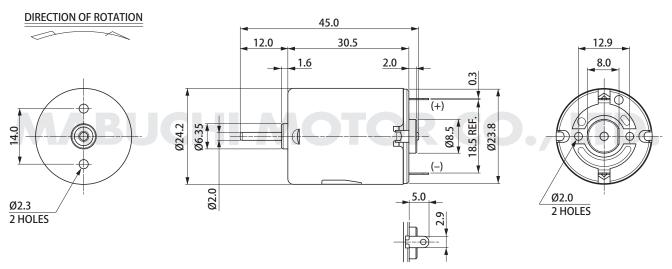

UNIT: MILLIMETERS

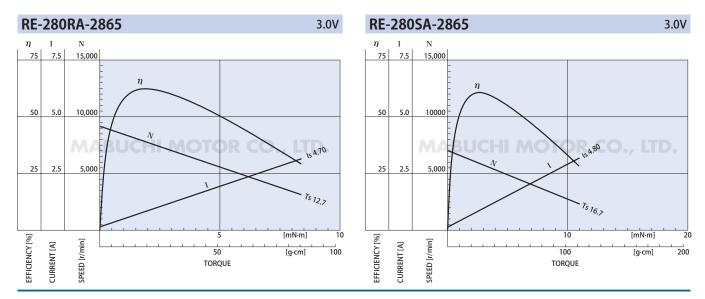

マブチモーター株式会社(本社 営業部) MABUCHI MOTOR CO., LTD.

(Headquarters Sales Dept. | 总公司 营业部)

千葉県松戸市松飛台430番地 〒270-2280 Tel. 047-710-1106 Fax. 047-710-1132 430 Matsuhidai, Matsudo City, Chiba 270-2280, Japan Tel. 81-47-710-1106 Fax. 81-47-710-1132 E-mail: slsinq@mabuchi-motor.co.jp