
The neighbourhood of a ‘nerve’ neuron

Bonsai-8B (1-bit), layer 9, neuron 3688. Two input routes and a pain gate shape it; its output spreads thinly; beside it sits a family of separate emotional-tension neurons that share one reader.

Every node's label was written blind from its top examples and checked with 8 sentences that should fire it and 8 near misses, committed before running (badge: held / failed, sentences fired of 8).

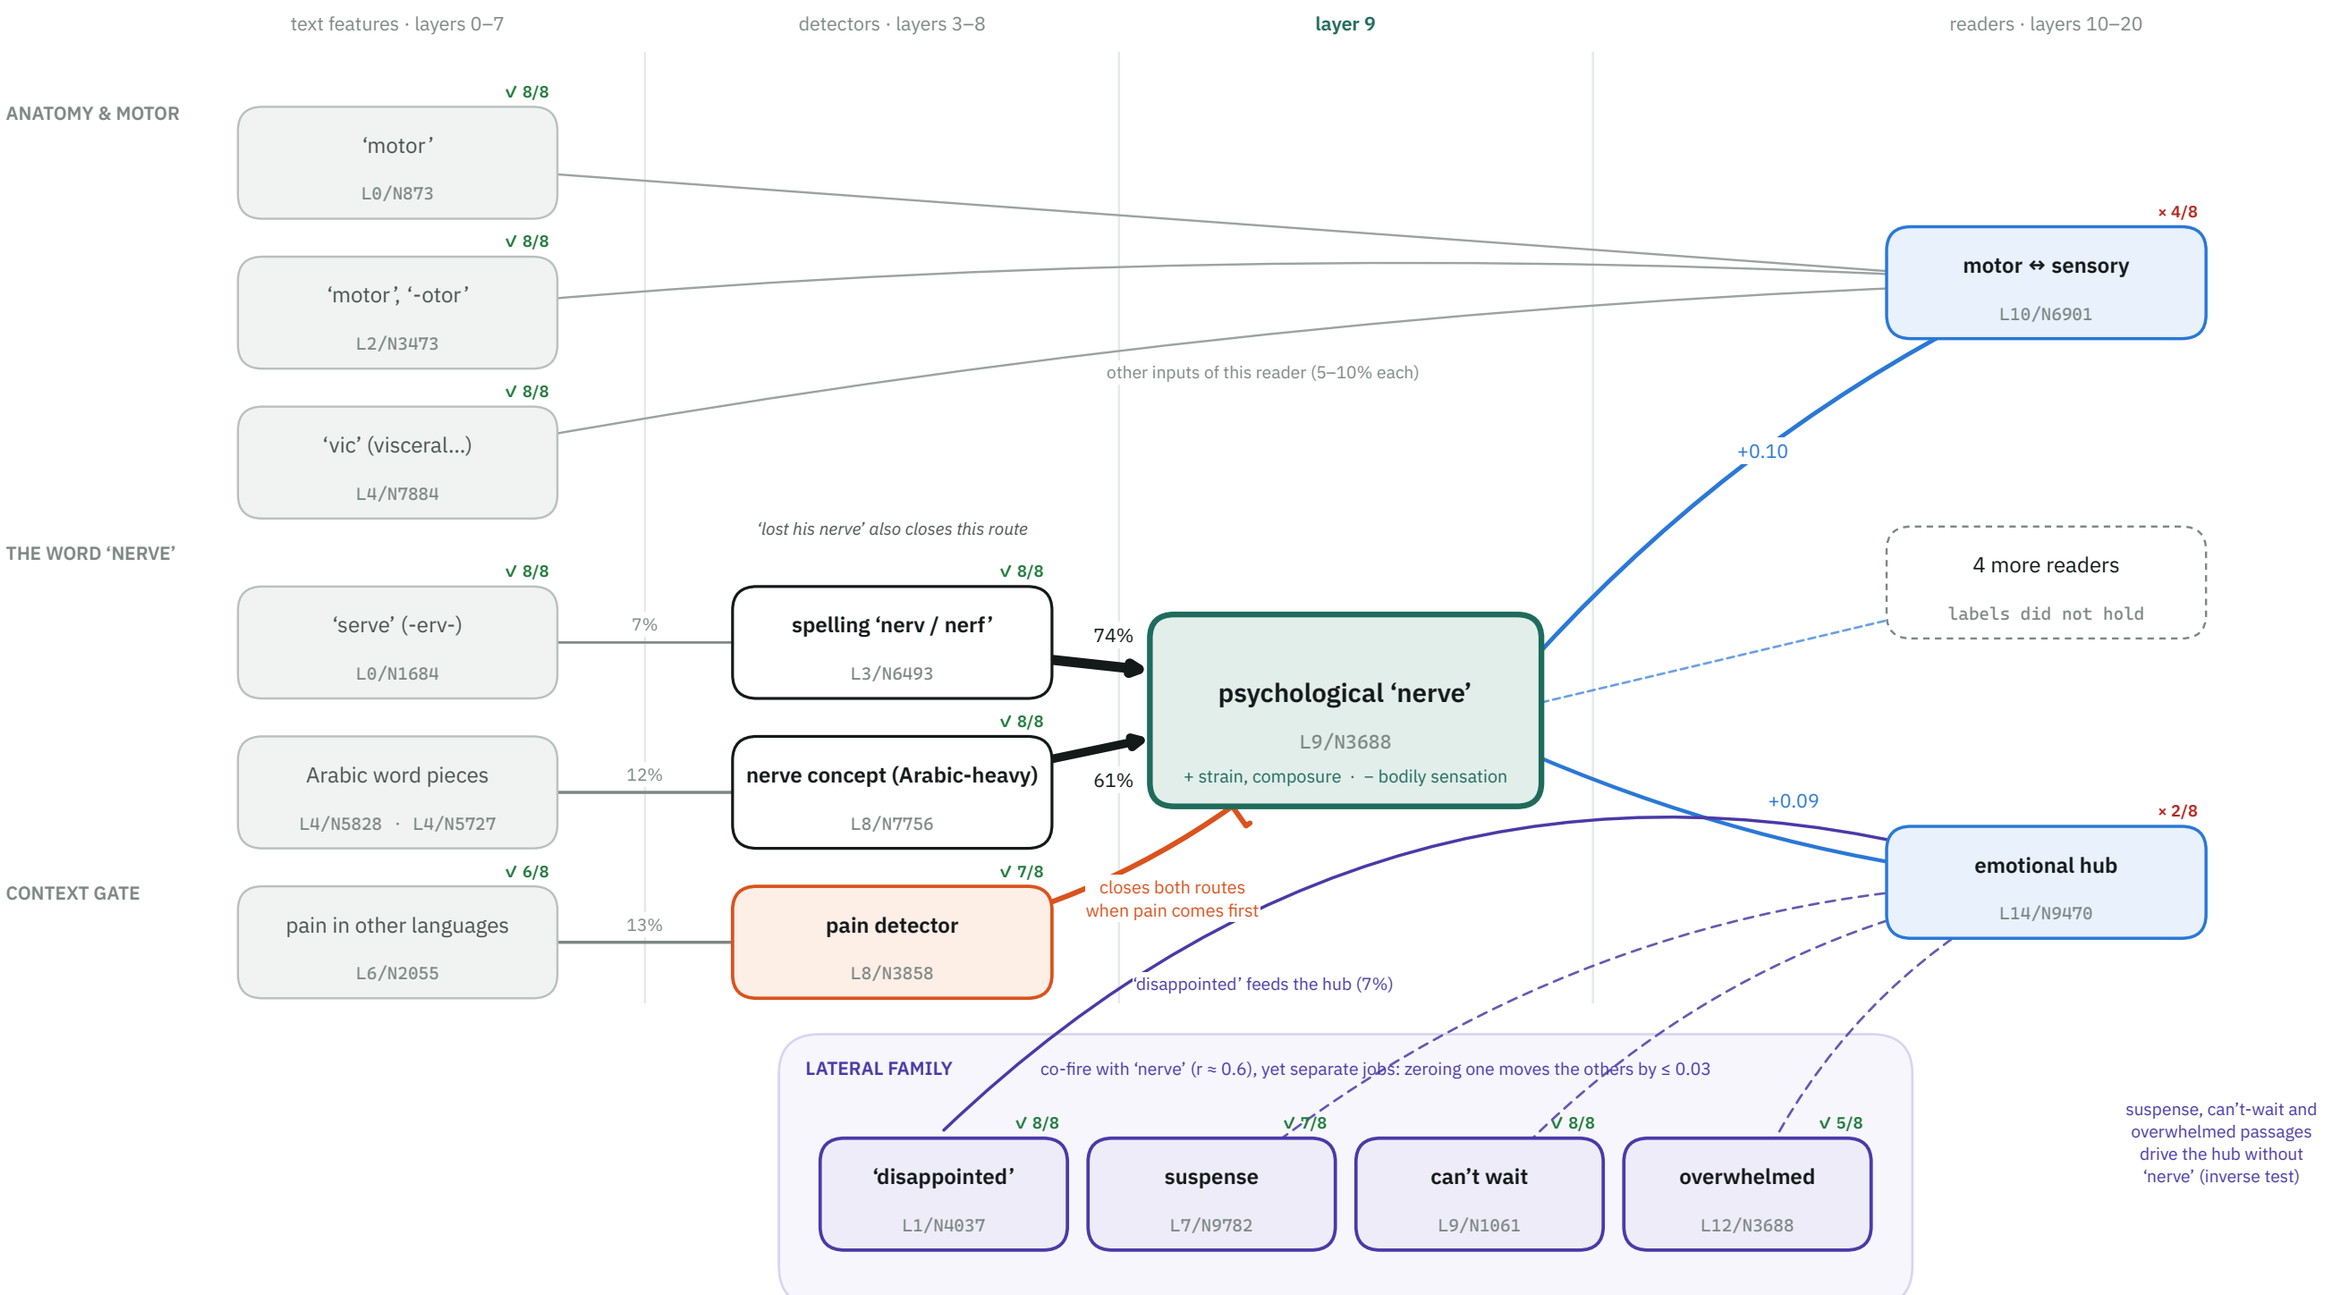

Not drawn: 30 more crawled neurons (mostly spelling and token pieces such as diarr-, trait, -ate, p-value digits, Albany; citations; code). 38 of 48 labels held overall.

Input %: share of the target's activation lost when that one neuron is zeroed. Reader numbers: change in the reader (fraction of its range) when ‘nerve’ is boosted.