

The neighbourhood of a ‘nerve’ neuron

Bonsai-8B (1-bit), layer 9, neuron 3688. Two input routes and a pain gate shape it, and its output spreads thinly. It responds to the word ‘nerve’ first, and more weakly to ‘strong’ and to words for being hit or hurt. Beside it sits a family of separate emotional-tension neurons that share one reader; each of them has its own crisp inputs (bottom).

Every node's label was written blind and checked with 8 sentences that should fire it and 8 near misses, committed before running (badge: held / failed, sentences fired of 8; failed labels got up to two more rounds).

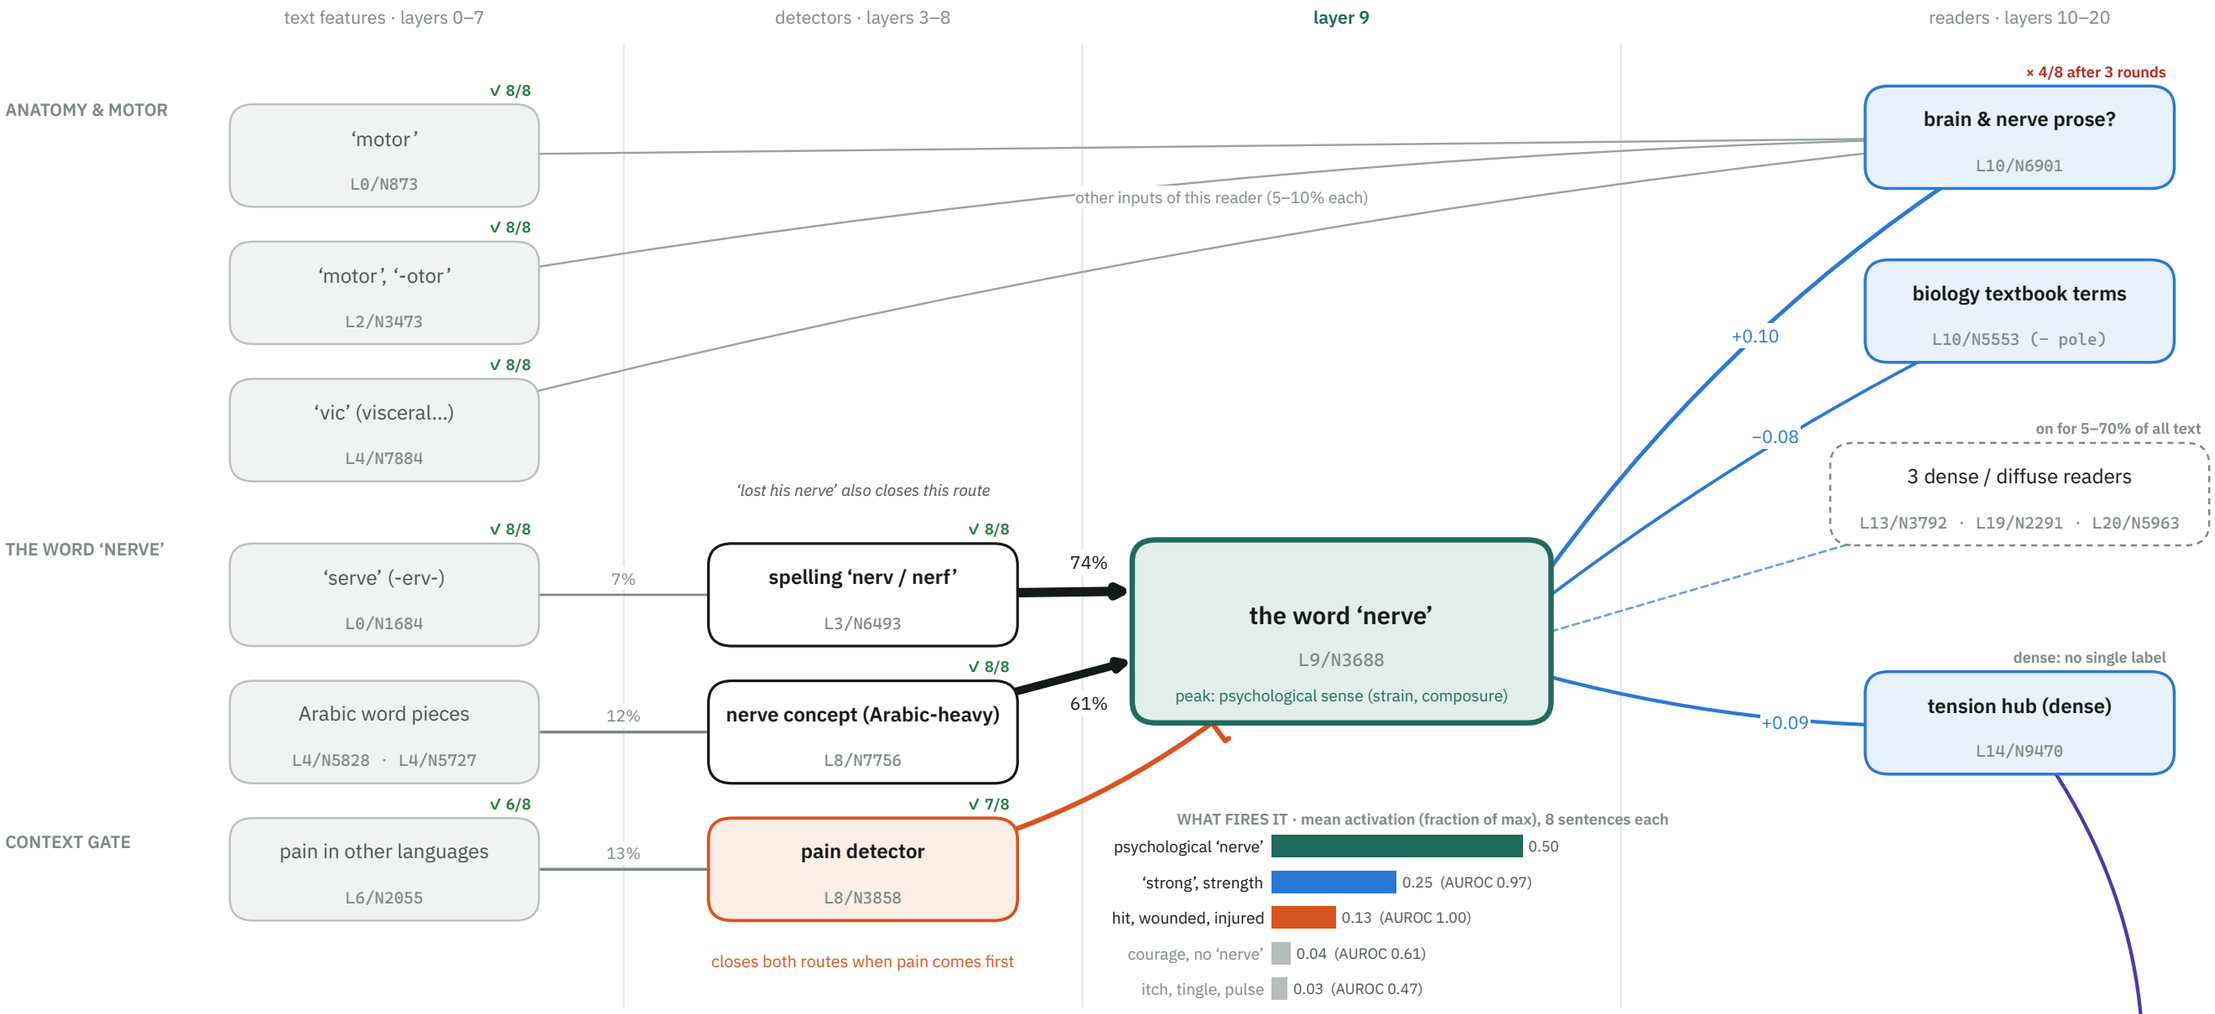

LATERAL FAMILY co-fire with ‘nerve’ (r ≈ 0.6), yet separate jobs: zeroing one moves the others by ≤ 0.03. Below each, the inputs that drive it most, each labelled and tested blind.

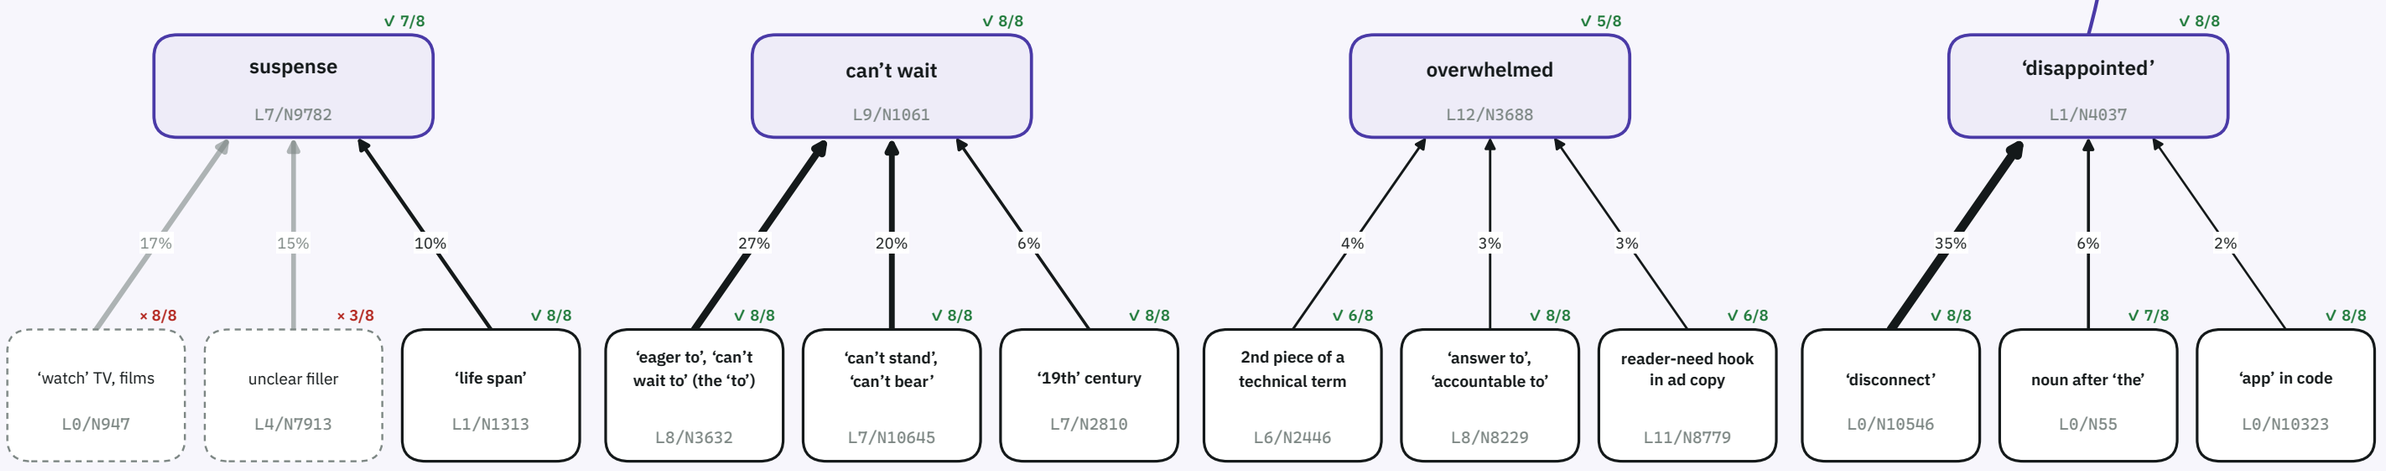

Not drawn: 30 more crawled neurons (mostly spelling and token pieces such as diarr-, trait, -ate, p-value digits, Albany; citations; code). 52 of 60 labels held overall; dense readers and two neurons still unresolved after three rounds count as failed.

Input %: share of the target's activation lost when that one neuron is zeroed. Reader numbers: change in the reader (fraction of its range) when ‘nerve’ is boosted. ‘What fires it’: no sentence below the first row contains a ‘nerve’ word.