


MP3 PLAYER · USB READER · CARD READER · MMC CARD READER · BT · REMOTE CONTROL

DPA-770®M

75 WATTS ■ AC & 12V DC Operation

- 4 Mic & 1 Aux Input.
- Built-in MP3 player with USB reader and remote control.
- Bluetooth facility.
- Line Output for connecting to a Booster Amplifier.
- Cut and Boost type Bass & Treble controls.
- Instant transfer to DC Power (Car Battery) if AC power fails.



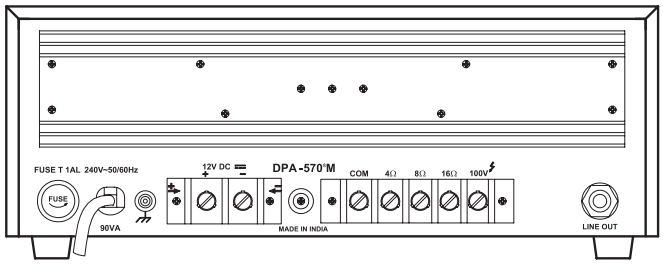

MP3 PLAYER · USB READER · CARD READER · MMC CARD READER · BT · REMOTE CONTROL

DPA-570®M

50 WATTS ■ AC & 12V DC Operation

- 3 Mic & 1 Aux Input.
- Built-in MP3 player with USB reader and remote control.
- Bluetooth facility.
- Line Output for connecting to a Booster Amplifier.
- Cut and Boost type Bass & Treble controls.
- Instant transfer to DC Power (Car Battery) if AC power fails.

SPECIFICATIONS	DPA-770®M	DPA-570®M
POWER OUTPUT	100W Max., 75W RMS at 10% THD, 70W RMS at 5% THD	75W Max., 50W RMS at 10% THD, 45W RMS at 5% THD
OUTPUT REGULATION	≤ 2 dB, no load to full load at 1kHz	≤ 2 dB, no load to full load at 1kHz
INPUT CHANNELS	4 × Mic. 0.6mV/4.7kΩ, 1 × Aux 100mV/330kΩ	3 × Mic 0.6mV/4.7kΩ, 1×Aux 100mV/330kΩ
FREQUENCY RESPONSE	50-15,000Hz ±3dB	50-15,000Hz ±3dB
SIGNAL TO NOISE RATIO	55dB	55dB
TONE CONTROLS	Bass: -10dB +7dB at 100Hz, Treble: -10dB +7dB at 10kHz	Bass: ±10dB at 100Hz, Treble: ±10dB at 10kHz
OUTPUTS	Line: 1V/3.5kΩ	Line: 400mV/3.5kΩ
SPEAKER OUTPUTS	4Ω, 8Ω, 16Ω & 100V	4Ω, 8Ω, 16Ω & 100V
DIGITAL PLAYER	MP3 Player with USB, SD, MMC Card Reader & Bluetooth	MP3 Player with USB, SD, MMC Card Reader & Bluetooth
POWER SUPPLY	AC: 220-240V 50/60Hz, DC: 12V (12V Car Battery)	AC: 220-240V 50/60Hz, DC: 12V (12V Car Battery)
POWER CONSUMPTION	AC: 170VA DC: 3A	AC: 90VA DC: 3.1A
DIMENSIONS	W385 × H125 × D300 mm	W305 × H120 × D305 mm
WEIGHT	8.80kg	6.20kg

