


Genesys Quick Reference Guide


ClinicalHub
The Right Care. The First Time.

Logging In


Step 1: Access the Genesys site. Link is available via the Clinical Hub portal at: bcehsclinicalhub.ca

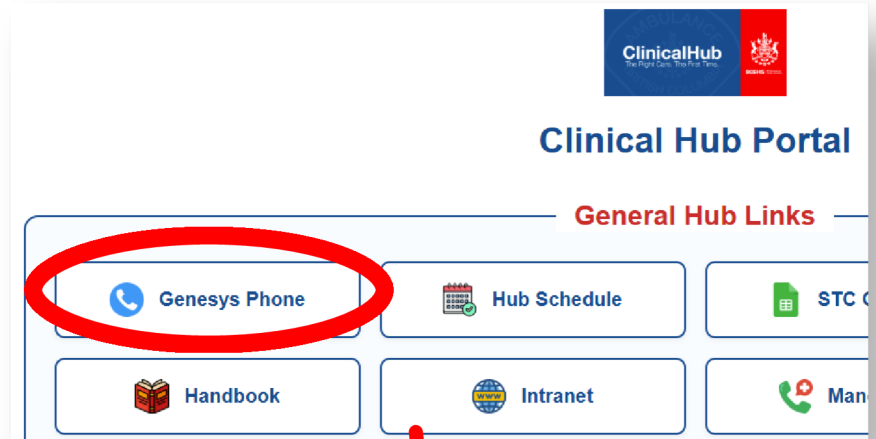

Step 2: Log on to your account using your username and password. Ensure that your region is set to “Americas (Canada)”

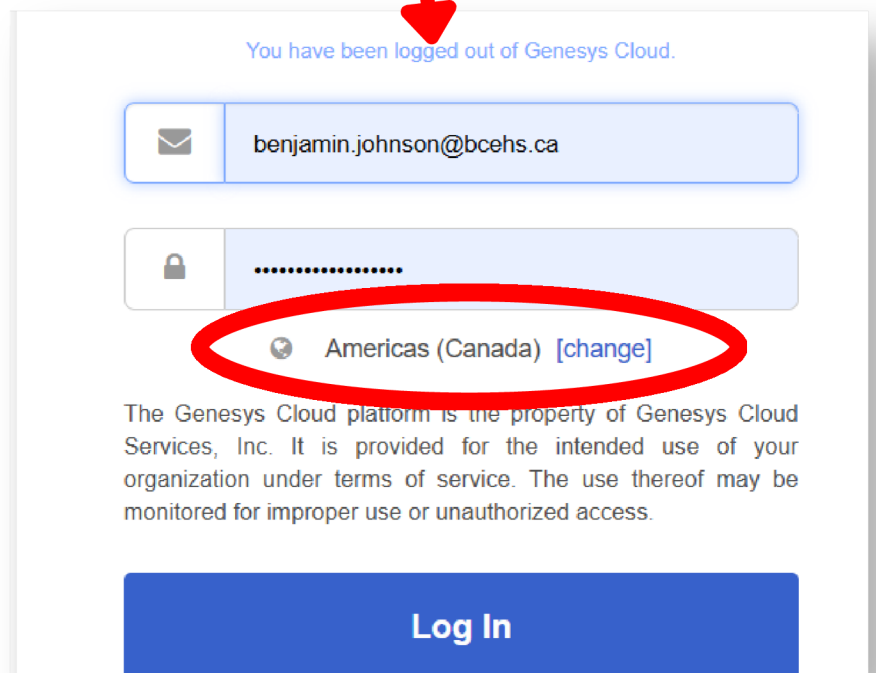


Step 3: Click on “Collaborate/Communicate”

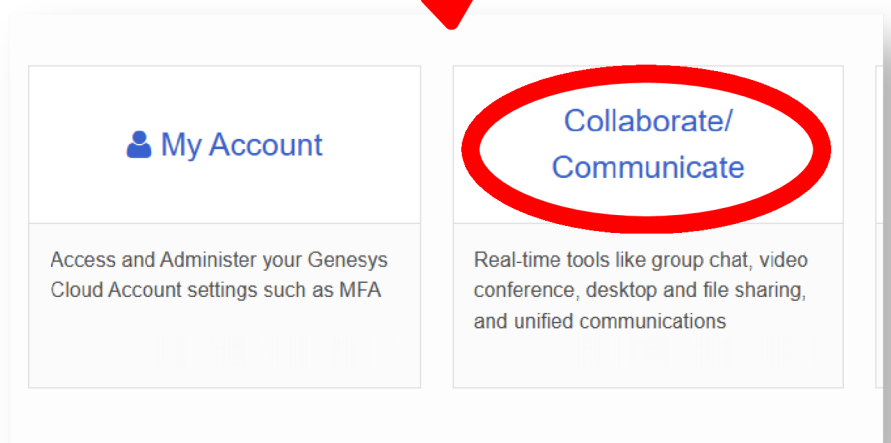


Logging In


Step 4: Select your profile icon in the top right, then choose the appropriate queue based on your job position for the day. Select “Activate Queues.”

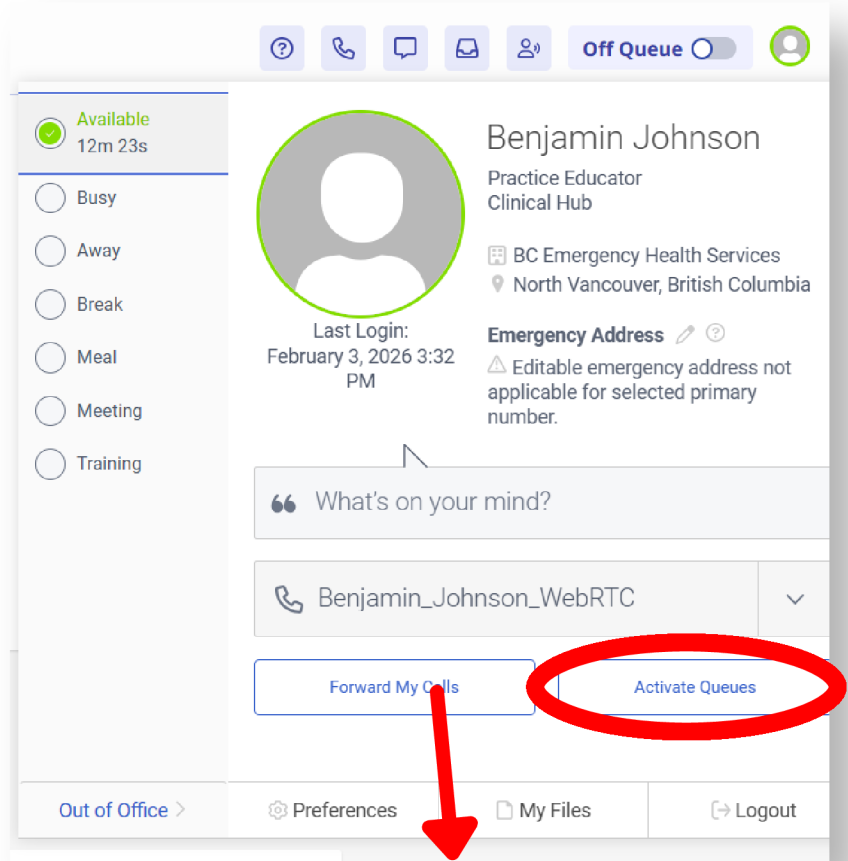

Step 5: “Deactivate” queues you do not need to belong to and “Activate” queues you need to belong to

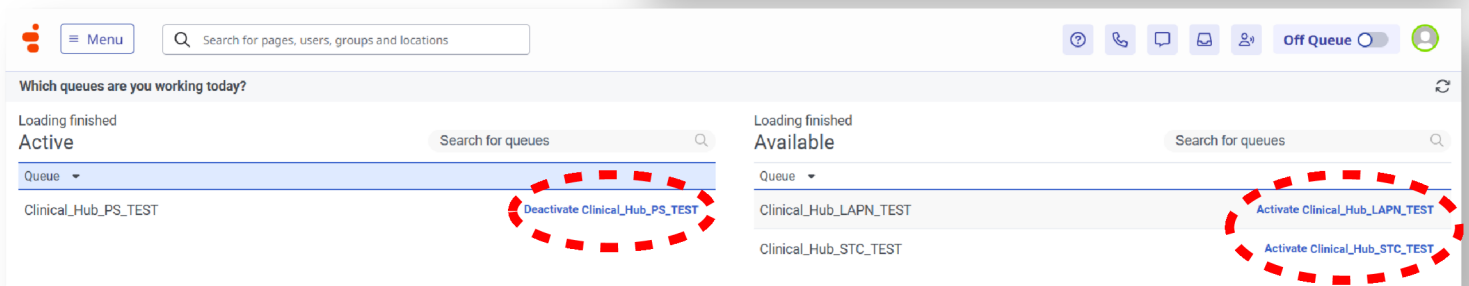


Step 6: Go “On Queue” for the shift. Change your status as needed throughout your shift

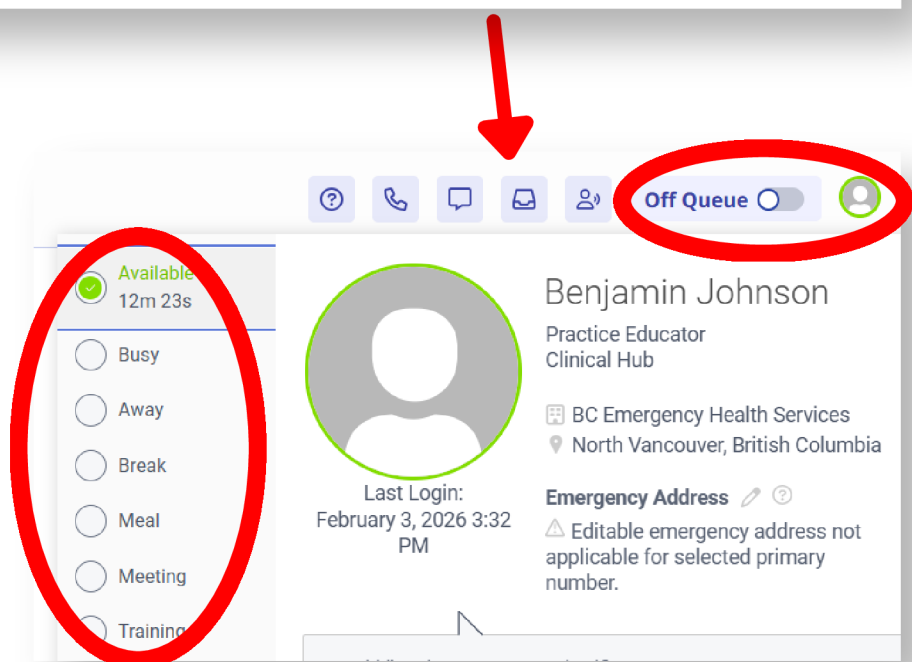


Answering or Making a Call

Answering: From the “Agent Workspace” you will see a dialogue pop up showing the incoming call and the queue that it is coming into. Click the “Answer” Button.

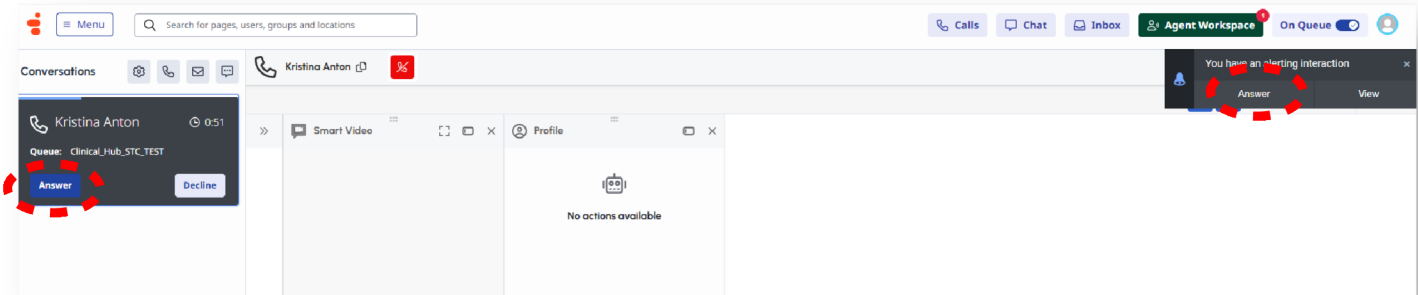


Making a Call:

Step 1: From the “Agent Workspace” select the Call Icon. This will open the call feature seen to the right.

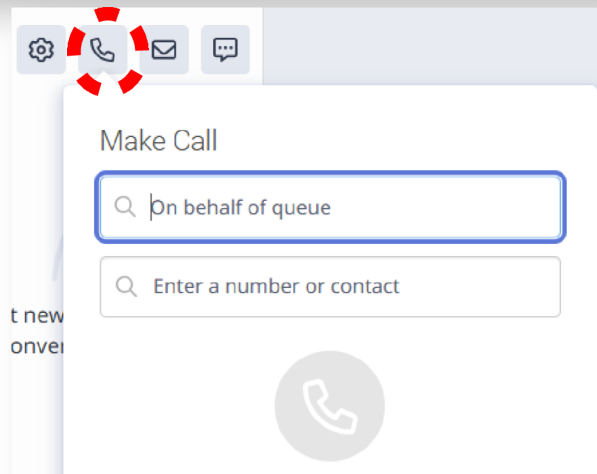


Step 2: In the “On behalf of queue” field begin to type the name of the queue you are working in (i.e.. LAPN queue, PS queue, etc). When the name of the queue appears select it.

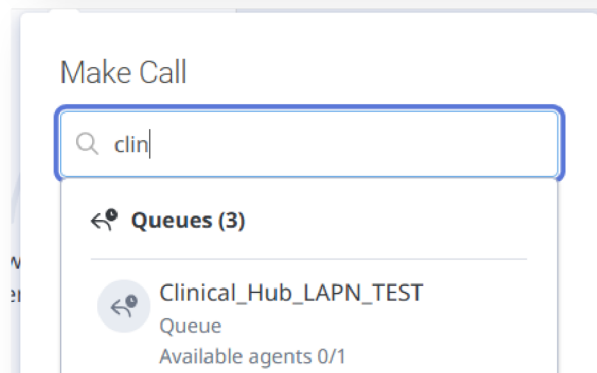


Step 3:

- If making an external call, enter the number you would like to call and press “enter”.
- If calling another Genesys user, search for the person you would like to contact and when they appear in the drop down menu select their name.

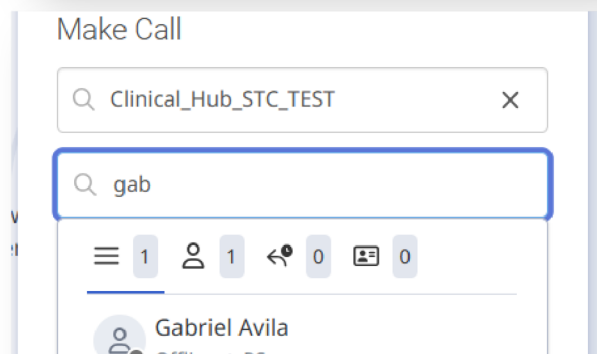


Answering or Making a Call

Step 4: Either Press “enter” again, or click on the large green call button

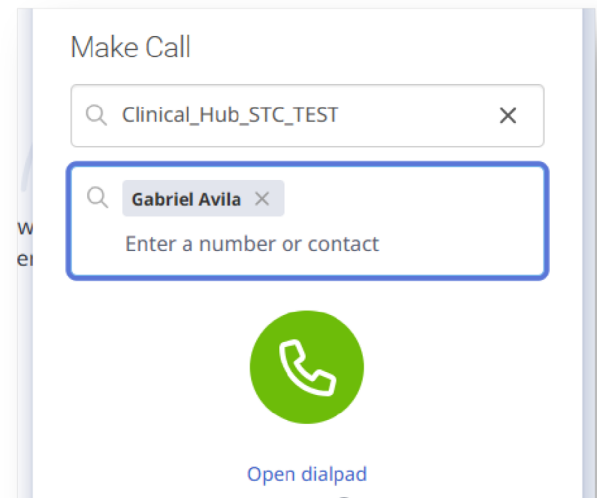


Step 5: You may mute yourself by clicking on the microphone icon. Whenever you are ready to end the call, click on the red icon of a phone with a slash through it.

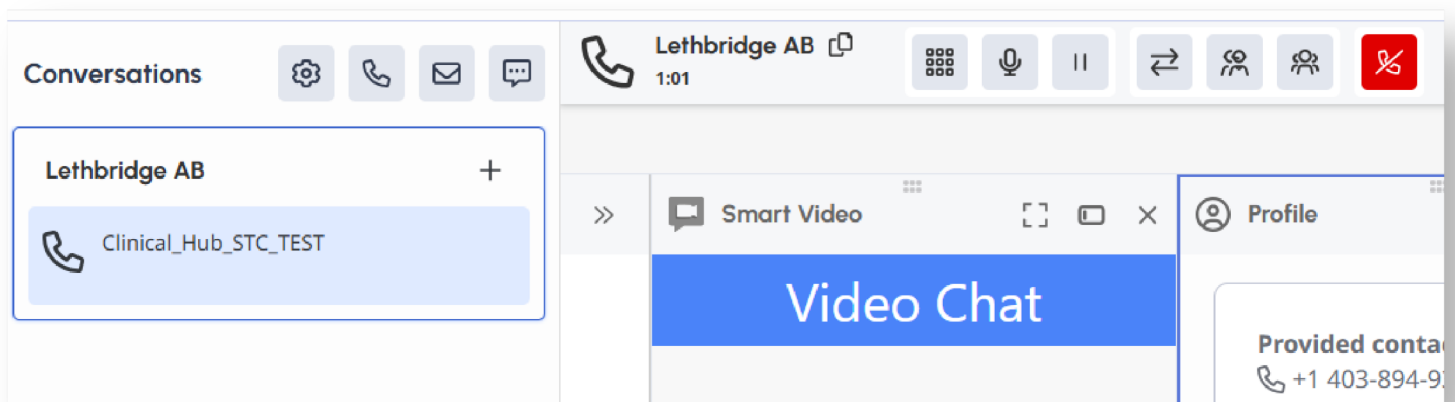

Conference Calls


Primary use: Connecting a crew to speak with EPOS, CCP-A or another third party for a joint consultation.

Step 1: To initiate a conference start by clicking the “Conference” button, circled in red below.

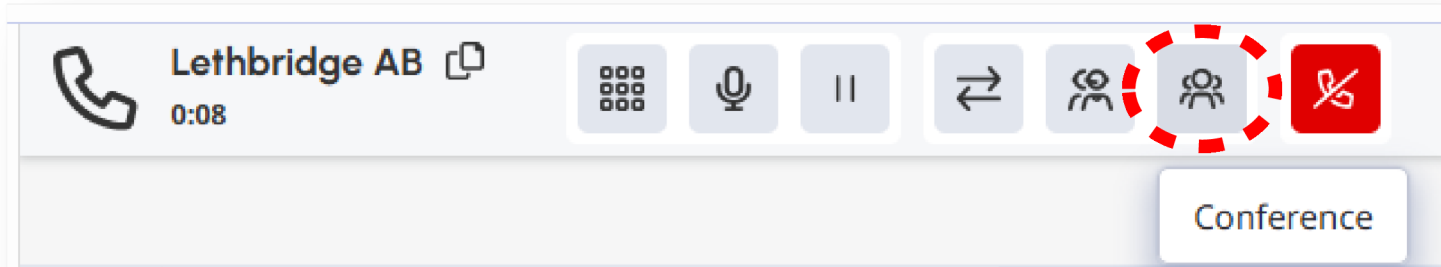


Step 2: Once you click on the “Conference” button a search bar will appear. You can either:

1. Search for the person you would like to contact (ie. EPOS) and when their name appears in the drop down list toggle to it and hit enter, or click on it with your cursor.
2. Enter any phone number you would like and press enter.

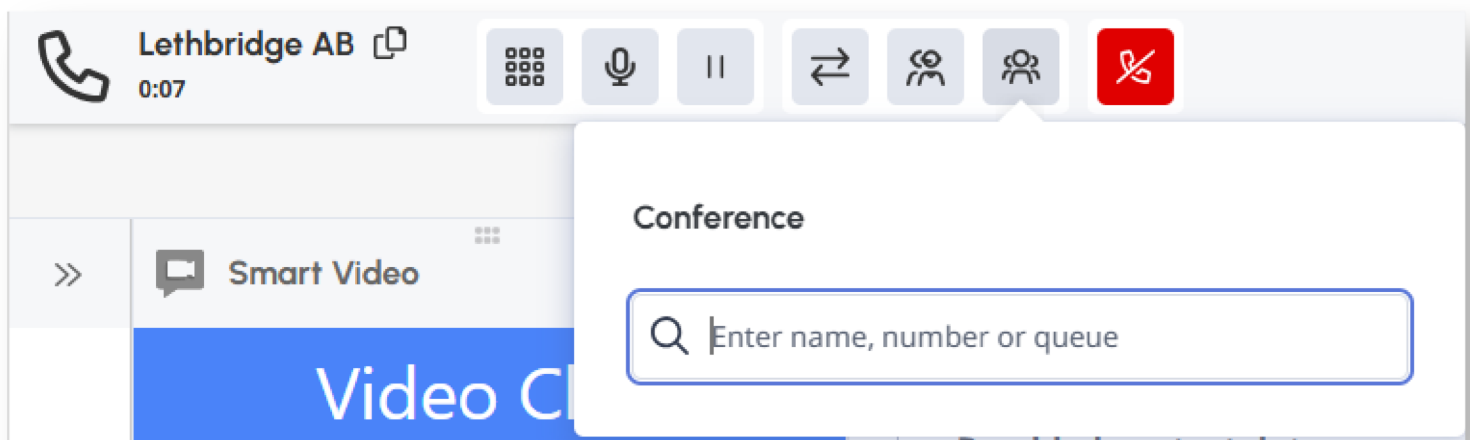


Step 3: Then simply click on the conference icon next to the search box (circled in red below). You can also toggle to this box and press “enter”.

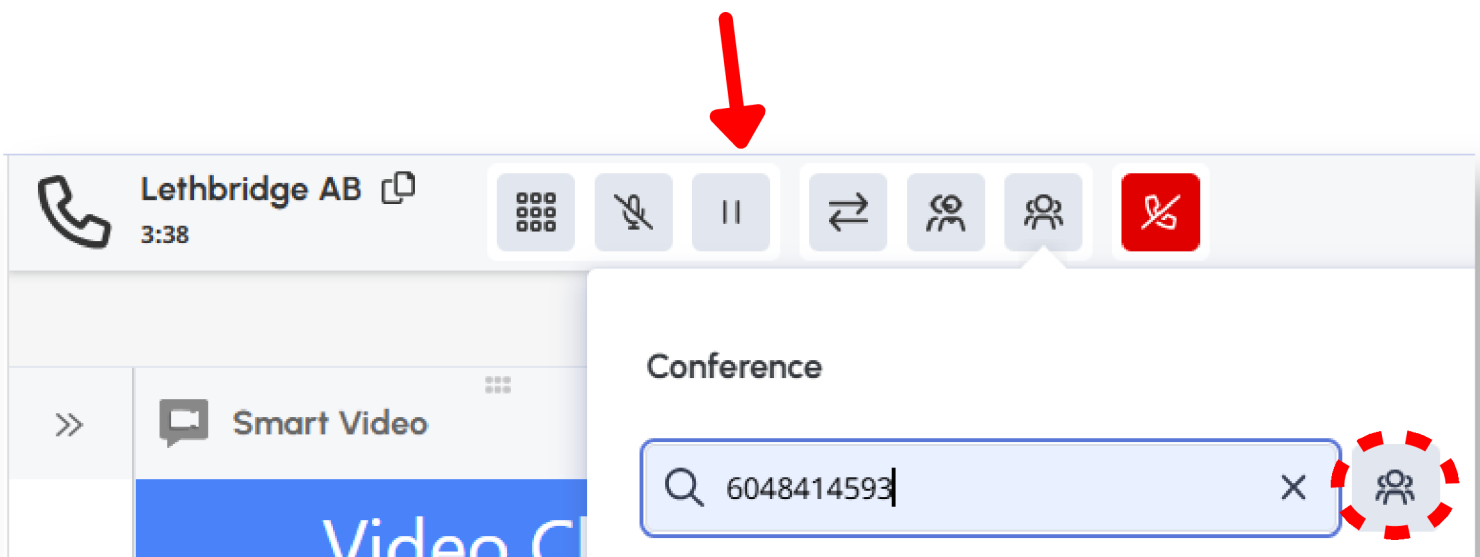

Step 4: The system will now dial the third party you are trying to contact, and when they pick up their phone, you will all be on the call together.

If you would like to leave the call, simply click on the red “hang-up” icon. You will leave the call while the other parties remain connected. The call will continue to be recorded.

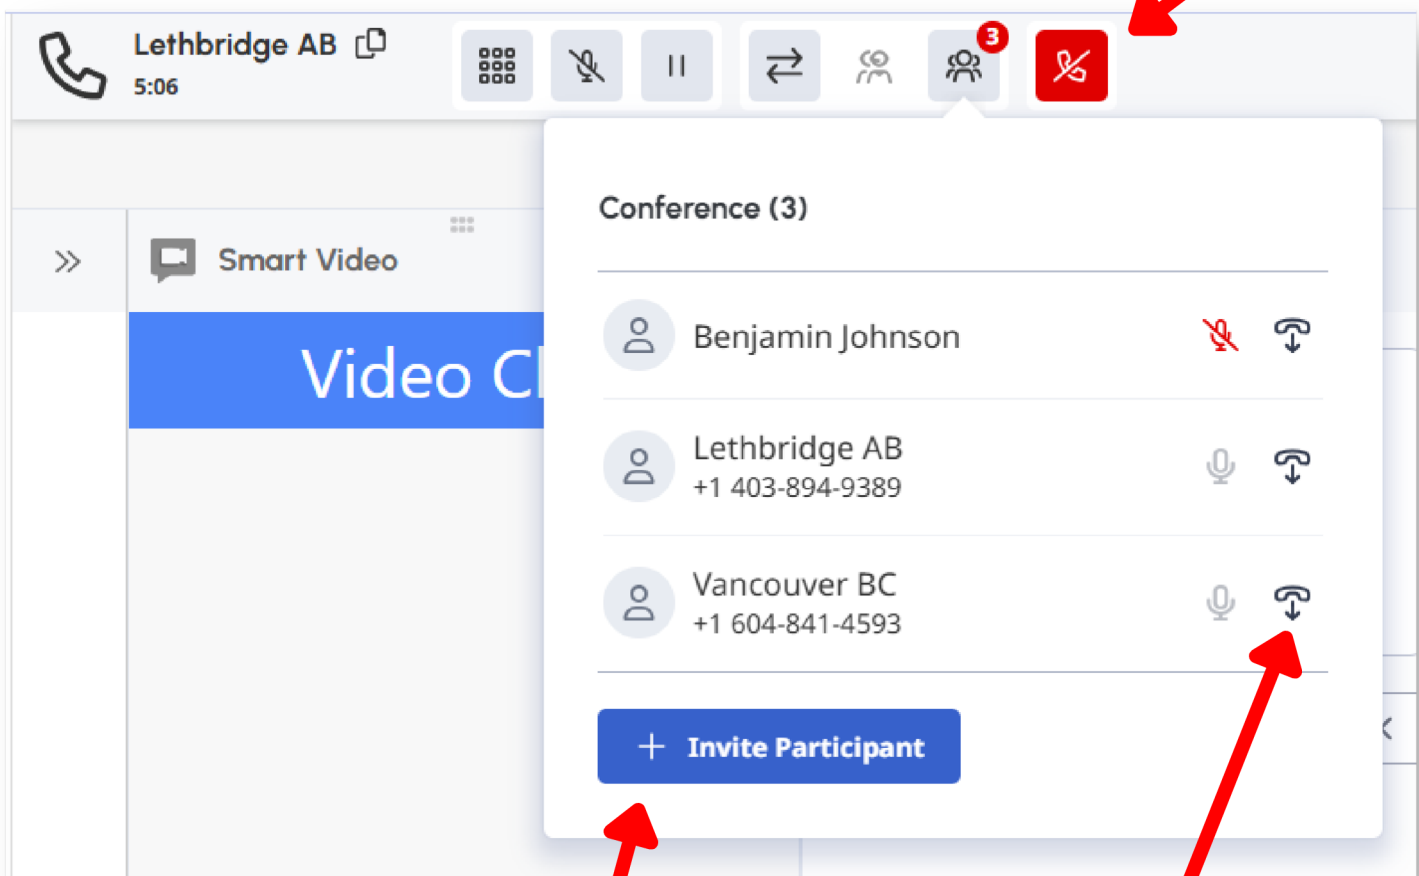

If you would like to add another party to the conference you may do so using the “Invite Participant” function


If you are finished speaking to one of the parties on the phone, you may disconnect them from the call by clicking on the black “hang-up” icon next to their name/phone number.

Consulting


Primary use:

1. Conferencing a caller in with a third party when you wish to speak with that third party privately prior to the conference. I.e. You want to speak privately with EPOS prior to bringing a consulting crew into a conference.
2. Transferring a caller to speak with another person and you want to ensure they pick up before transferring. Example: A crew calls and asks to speak with another person whom they had spoken with earlier. This allows you confirm the other person is available and then transfer the call.


Step 1: When you are in a call your screen should appear similar to what is shown below. To initiate a consultation click on the “Consult” icon, circled in red below.

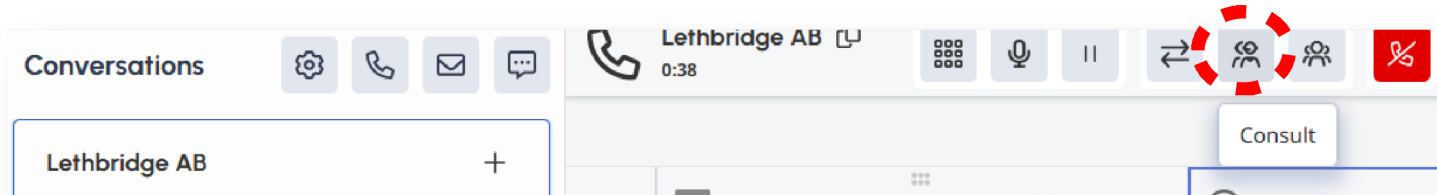

Step 2: A search box appears. Either search for the person you would like to call and click on their name, or enter the phone number and press “enter”. Then click on the “Consult” icon, circled in red to the right. You can also toggle to this icon using the “tab” button on your keyboard and press “enter”.

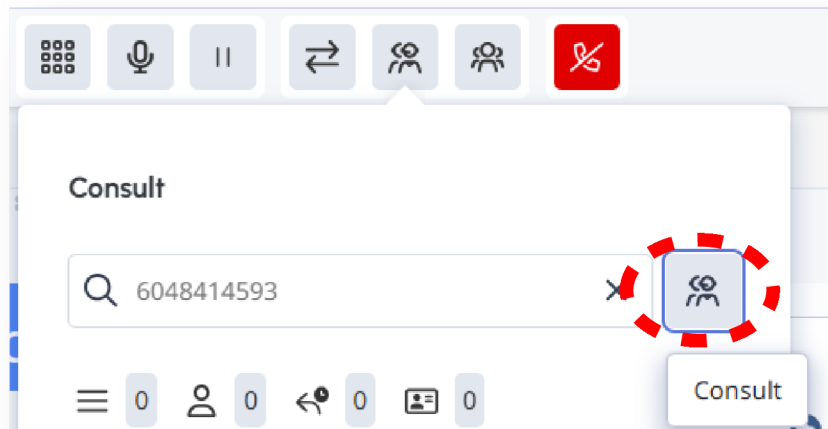

Step 3: When the person you are consulting picks up the original caller will be placed on hold. You can then have a private conversation with that third party prior to either transferring or conferencing the call.

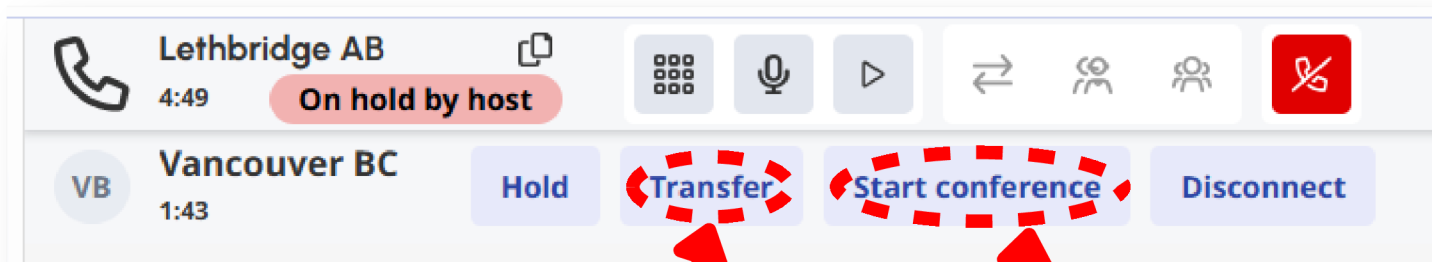

If you select “transfer”, you will immediately drop off the call and the two remaining parties will stay in the call together


If you select “Start conference”, all three parties will be on a conference call together.

Transferring a Caller


Primary use:

Transferring a caller to another person when you are **certain that person will pick up**. Example: You are a PS. A crew calls who needs to talk to the PS sitting right beside you. You can use this feature to transfer the call. (This would be similar to “parking” a crew on our old phones).

Step 1: When you are in a call your screen should appear similar to what is shown below. To initiate a call transfer click on the “Transfer” icon, circled in red below.

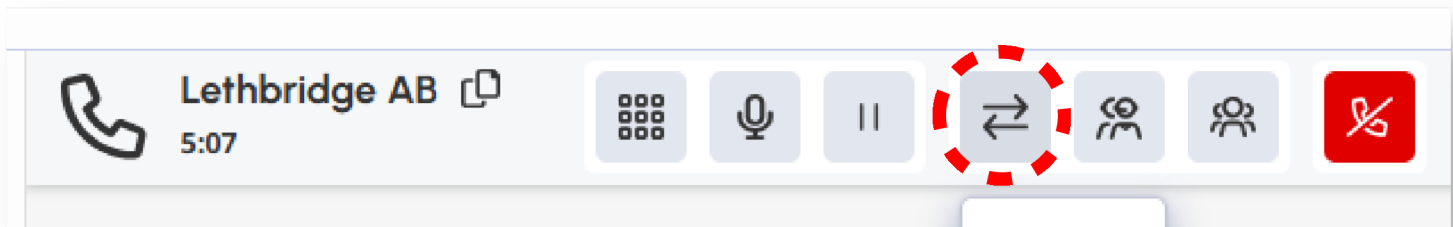

Step 2: A search bar appears. You can search for the person you would like to transfer the call to, or you can manually enter their phone number and press enter. Click on the “transfer” icon next to the search field, circled in red below. As soon as you press that button you will be disconnected. The call will be routed to the receiving person to wait for them to pick up.

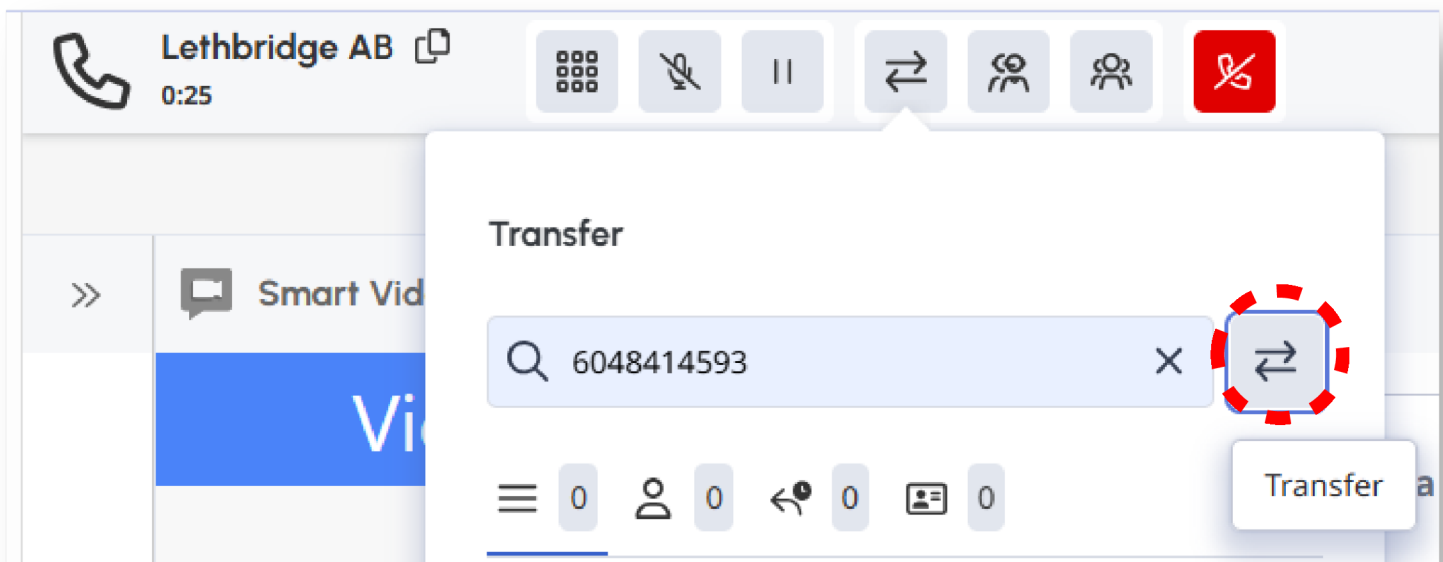


Video Calls

If you are already speaking with someone on the phone and would like to initiate a video call with them you can do so using this feature. The caller must be using a cell phone with a camera.

Step 1: Call the person you wish to speak to.

Step 2: While on the phone with the caller click on the “Send SMS and Invite” button. This will send a text message to the caller with a link.


Instruct the caller to follow the link in the text which will open their web browser and provide the option to join a video call. If they are asked to allow permission for their browser to access the camera and microphone they should allow access.

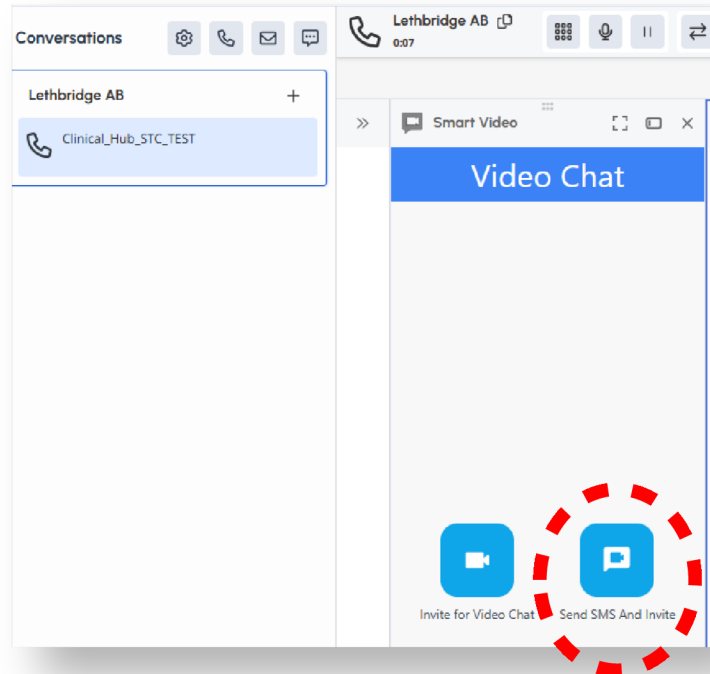

While the invitation is being sent you will see a green progress bar and a preview of your webcam. When the caller picks up you will see their video feed.


Please note that the audio from the call is transmitted over the phone line. This means that when you disconnect or mute the video call audio is still being transmitted over the phone

The caller will have the ability to switch from the main camera to the selfie camera. One quirk of the system is that when the caller does this it toggles sequentially through all cameras on the phone. This means it may take several attempts to get back to the selfie camera depending on how many forward-facing cameras the caller's phone has.

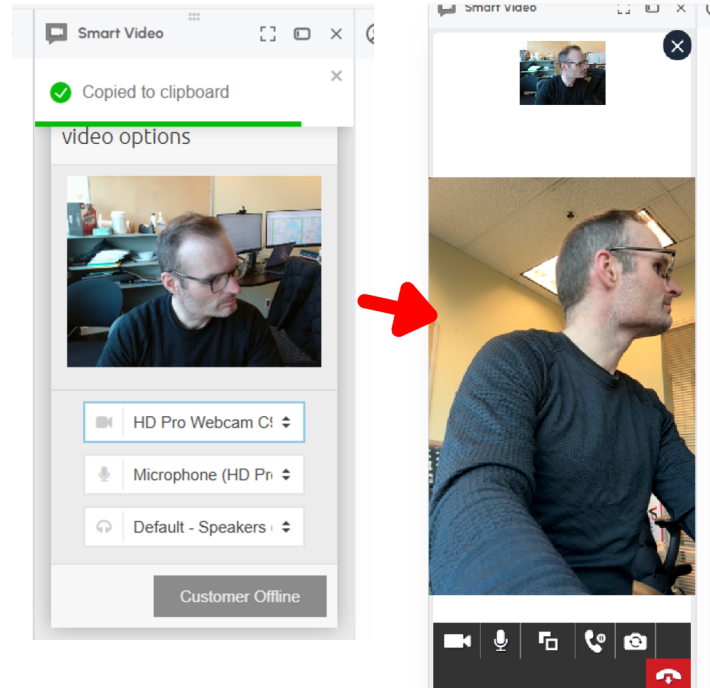


Video Troubleshooting

Problem: The caller's phone has a dialogue box that states “No Camera Found” and “No microphone found” and the caller is unable to join a video call. This occurs when the user has disabled microphone and camera access for the browser in the app settings.

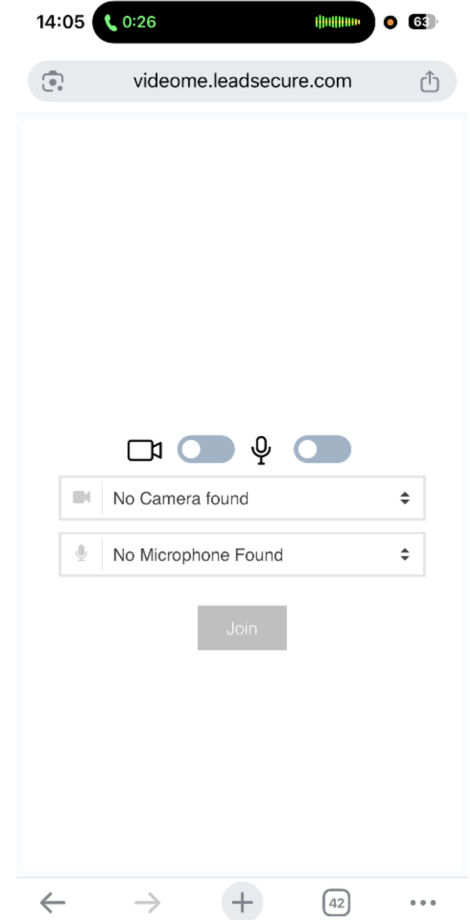

Solution: Ask the caller to open the “settings” app on their phone. In the search bar type in the name of the browser they use (ie. Safari, Chrome, etc.). They can then open the browser settings and allow permission to the browser to use the microphone and camera. They can always revert their settings later.

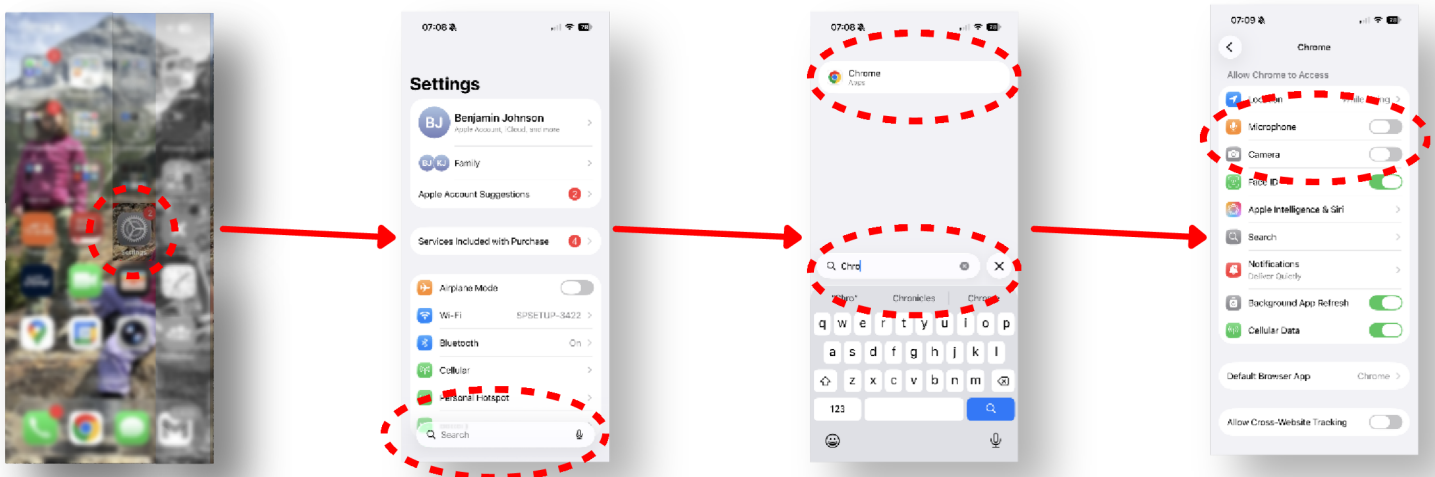

Settings: Audible Ringtone

Problem: By default ringtones only come through the headset or handset that is connected to the USB soundbox (JPL soundbox).

Solution: Open the “profile” icon at the top of your screen





Select the “Preferences” option in the dialogue box

Open the “Sound” settings menu and find the “Audio Device Profile” drop-down menu.

Select the option to make a “New Profile.”

This will set up a profile for the computer that you are on which will direct the call audio to one sound device (the sound box while pushing the call notification through another device (the speakers).

Consider naming the profile after the workstation you are working on (ie “2301”)

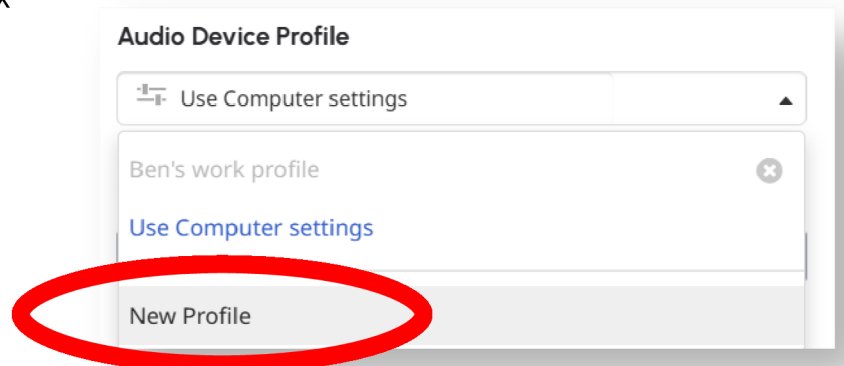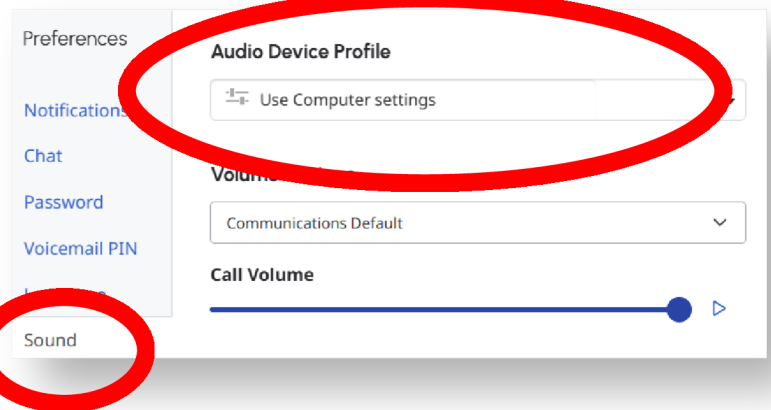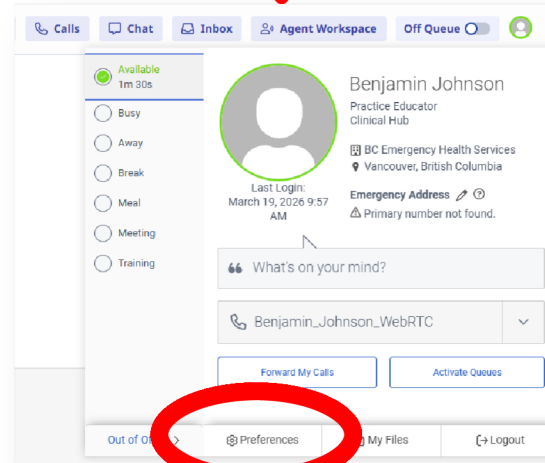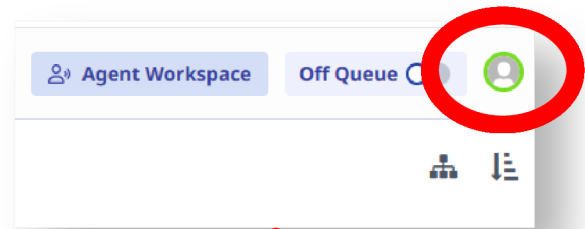

Settings: Audible Ringtone

After naming your profile you will see options for your:

- Microphone input
- Call audio output
- Call ringer/notification output

Audio Device Profile

 Profile Name

☐ Default profile

 Integrated Camera (04f2:b7c0)

☒ Keep this profile selected if this camera is unavailable (will use system default camera)

 System Default

 System Default

 System Default

For the microphone input and call audio output select the JBL soundbox. This will ensure the microphone and speaker on your handset or headset are being used for calls.

For the ringer/notification output select “Speakers (RealTek® Audio)” If that option is not available select the speakers on your computer monitor. This will ensure that when your phone rings the sound comes through the computer speakers

Audio Device Profile

 Profile Name

☐ Default profile

 Integrated Camera (04f2:b7c0)

☒ Keep this profile selected if this camera is unavailable (will use system default camera)

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default

 System Default


 System Default

 System Default

 System Default

 System Default

 System Default




The screenshot shows the Windows Settings application, specifically the 'Sound' settings page. Under the 'Output' section, 'Speakers (Realtek(R) Audio)' is selected. At the bottom of the window, the 'Save' button is highlighted with a red circle.

Finally, save your new profile.


Settings: Audible Ringtone

Problem: Other users can call you while you are already in a phone call. This produces a loud and audible ring tone in your ear, interrupting your phone call.


Solution: Open the “profile” icon at the top of your screen

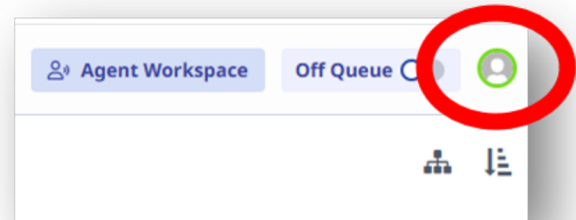


Select the “Preferences” option in the dialogue box

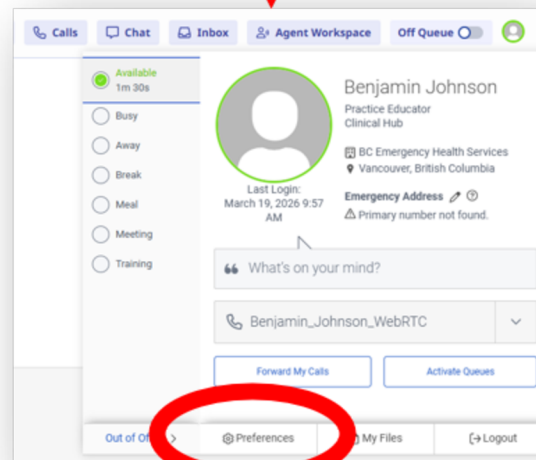

Open the “Sound” settings menu and find the “Alert While on Call Volume” slider

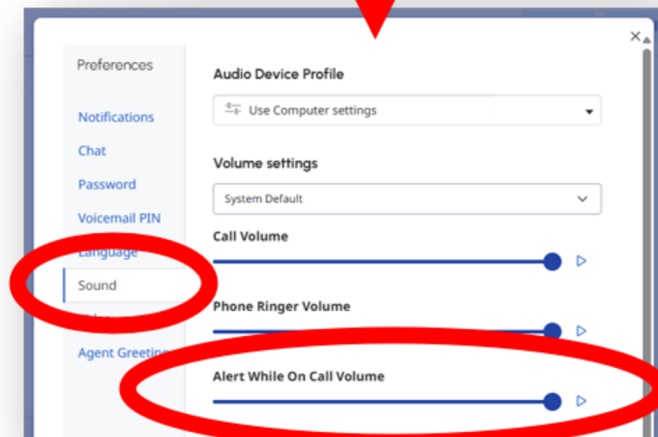


Lower the “Alert While On Call Volume” level to “0”

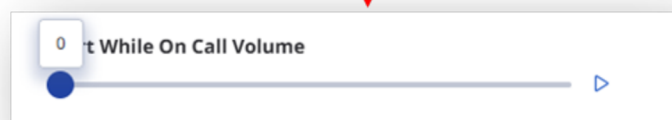


You will no longer be deafened by someone trying to call you when you are on the phone.

Reviewing Call Audio

On the left hand menu, select “Analytics”, then “Analytics Workspace”

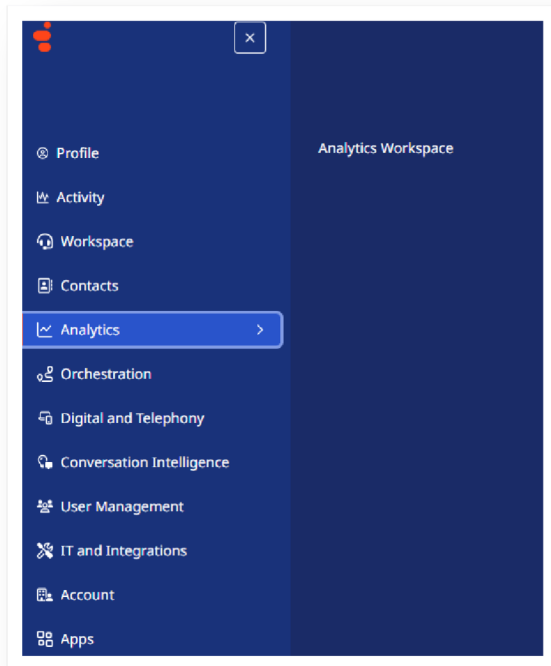

In the Analytics Workspace, select “Interactions”

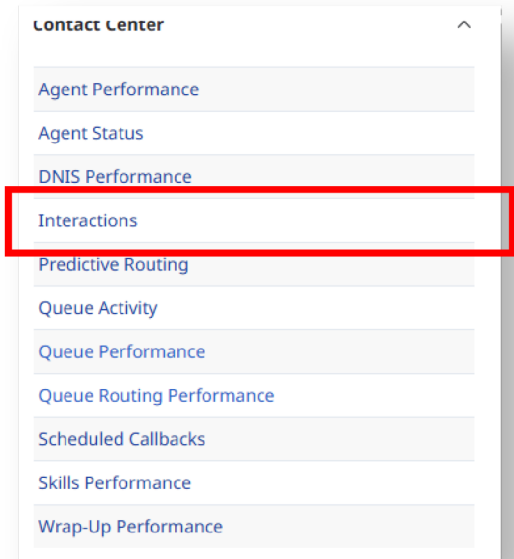

Frontline staff will only have access to their own call audio on a rolling 24 hour window. Double click on a call to open it and listen to the call.

A screenshot of the 'Interactions' table in the Contact Center interface. The table displays a list of calls with columns for Users, Remote, Date, Conversation duration, and Direction. The date filter is set to 'September 1, 2026'.

Interactions					
September 1, 2026					
All					
	Users	Remote	Date	Conversatio...	Direction
	David Brown	+1 250-891-2196	Tue, Sep 1, 2026 10:11 AM	0.811s	Outbound
	David Brown	Victoria BC	Tue, Sep 1, 2026 10:10 AM	1m 14s	Outbound
	Kristina Anton	+1 604-866-8264	Tue, Sep 1, 2026 8:31 AM	0.749s	Outbound
	Kristina Anton	Aldergrove BC	Tue, Sep 1, 2026 8:30 AM	1m 17s	Outbound

High Level Guidance:

- Individual user/account issue? Troubleshooting below, then escalate to **BCEHS helpdesk. 250-953-3500**
- Multiple people having same issue? **Escalate to PTS Charge**
 - **Charge Cell phone #1: 604-786-6201**
 - **Charge Cell phone #2: 604-215-5910**

Login Challenges

- Password not working? → Try using SSO (“Login with BCEHS Account”)
- Multiple people can’t log in? → **Escalate to PTS Charge**

Audio Challenges


Can’t hear caller, caller can’t hear you, poor audio quality, echoing during calls, microphone not detected

- Ensure computer volume on
- Ensure mic permissions/audio profile set correctly
- Swap headsets
- Confirm headset & JPL box connected, confirm JPL box connected to computer
- If not resolved → **Escalate to Helpdesk**


Technical Audio Challenges

Calls dropping unexpectedly, laggy voice audio, loss of service
Escalate to PTS Charge

PS Call Flow

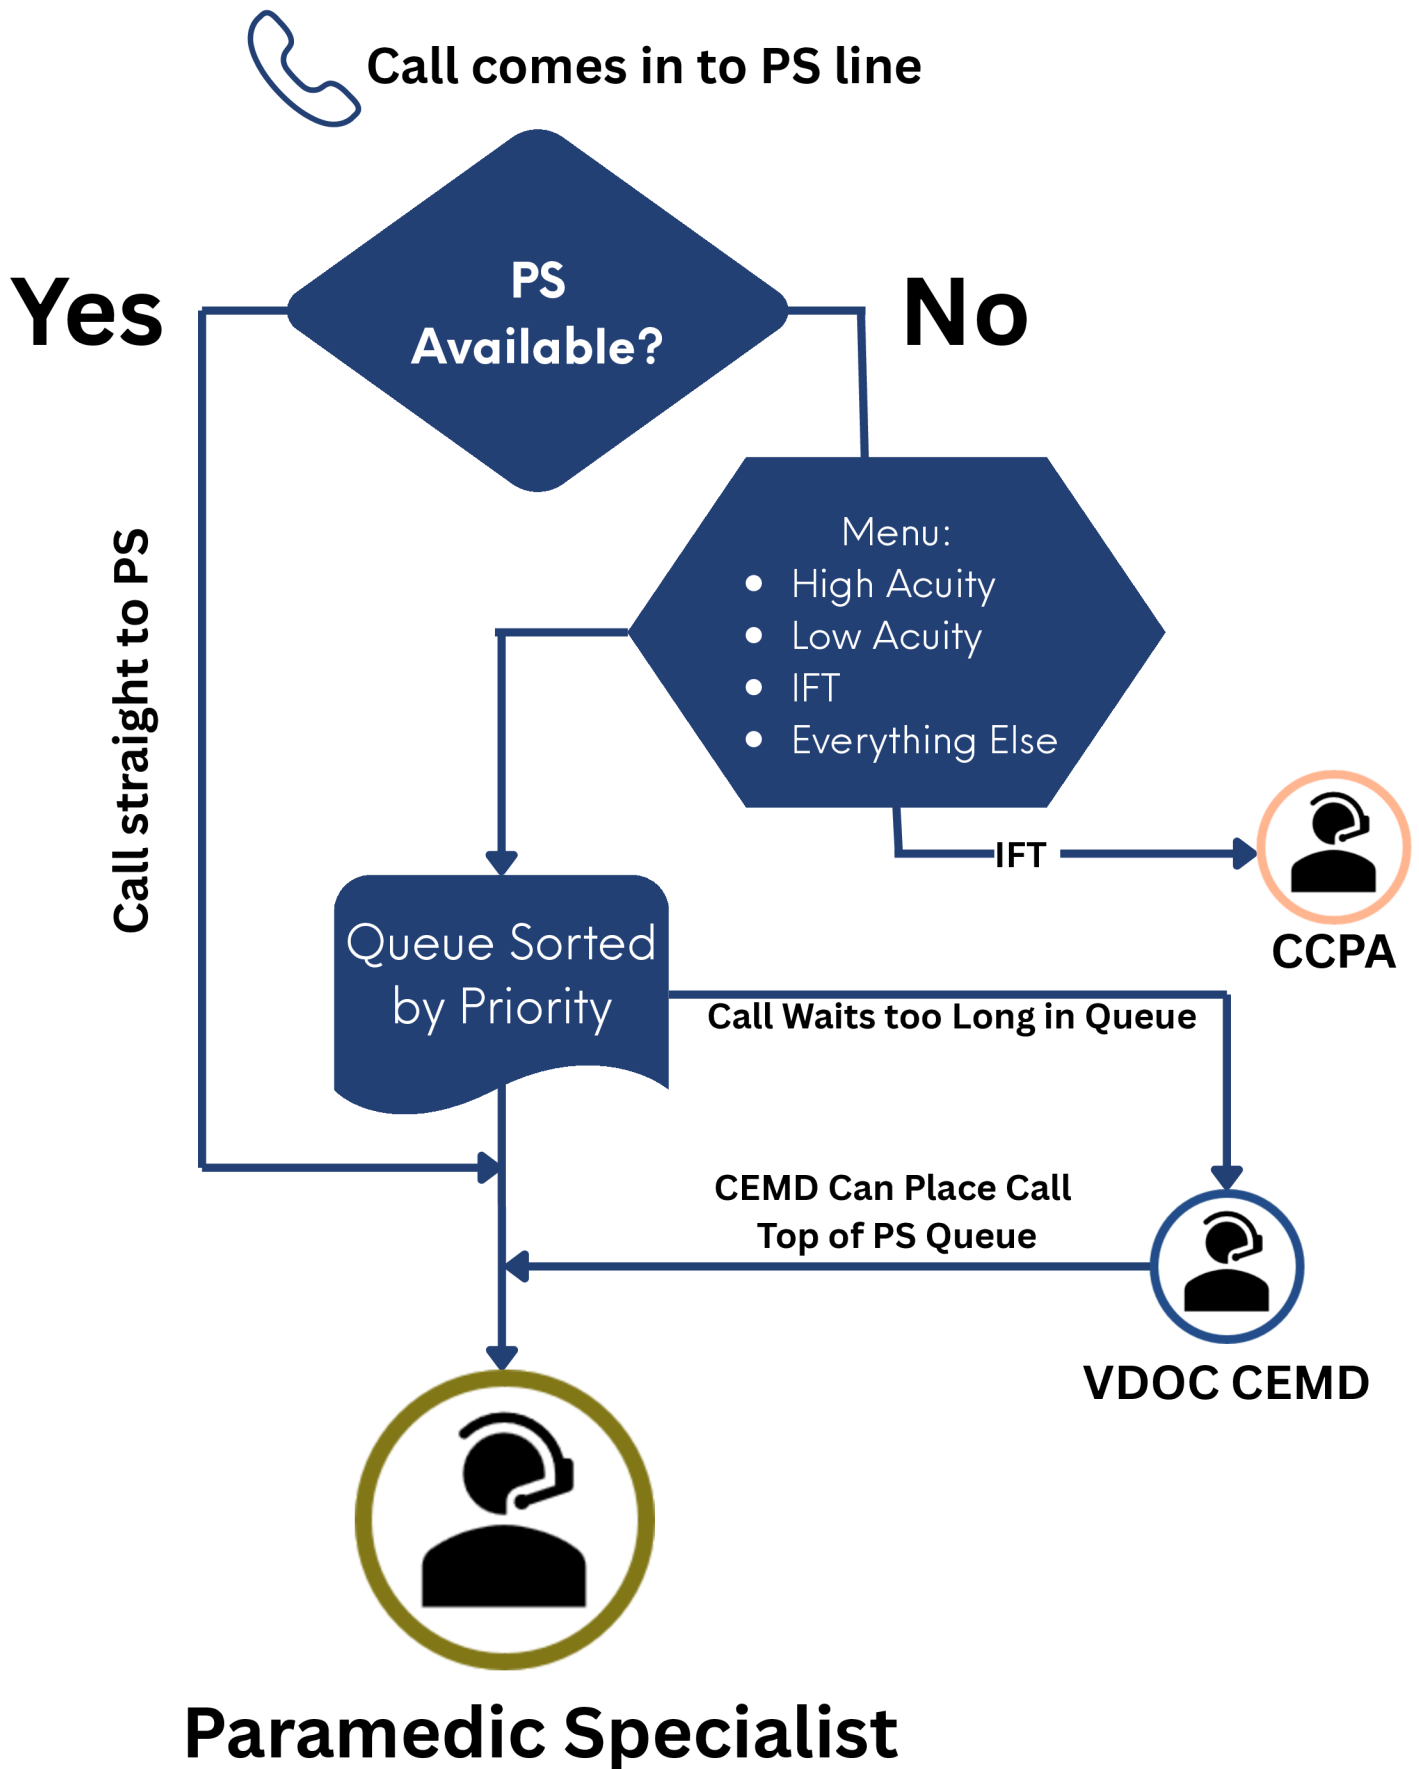

STC & LAPN Call Flows

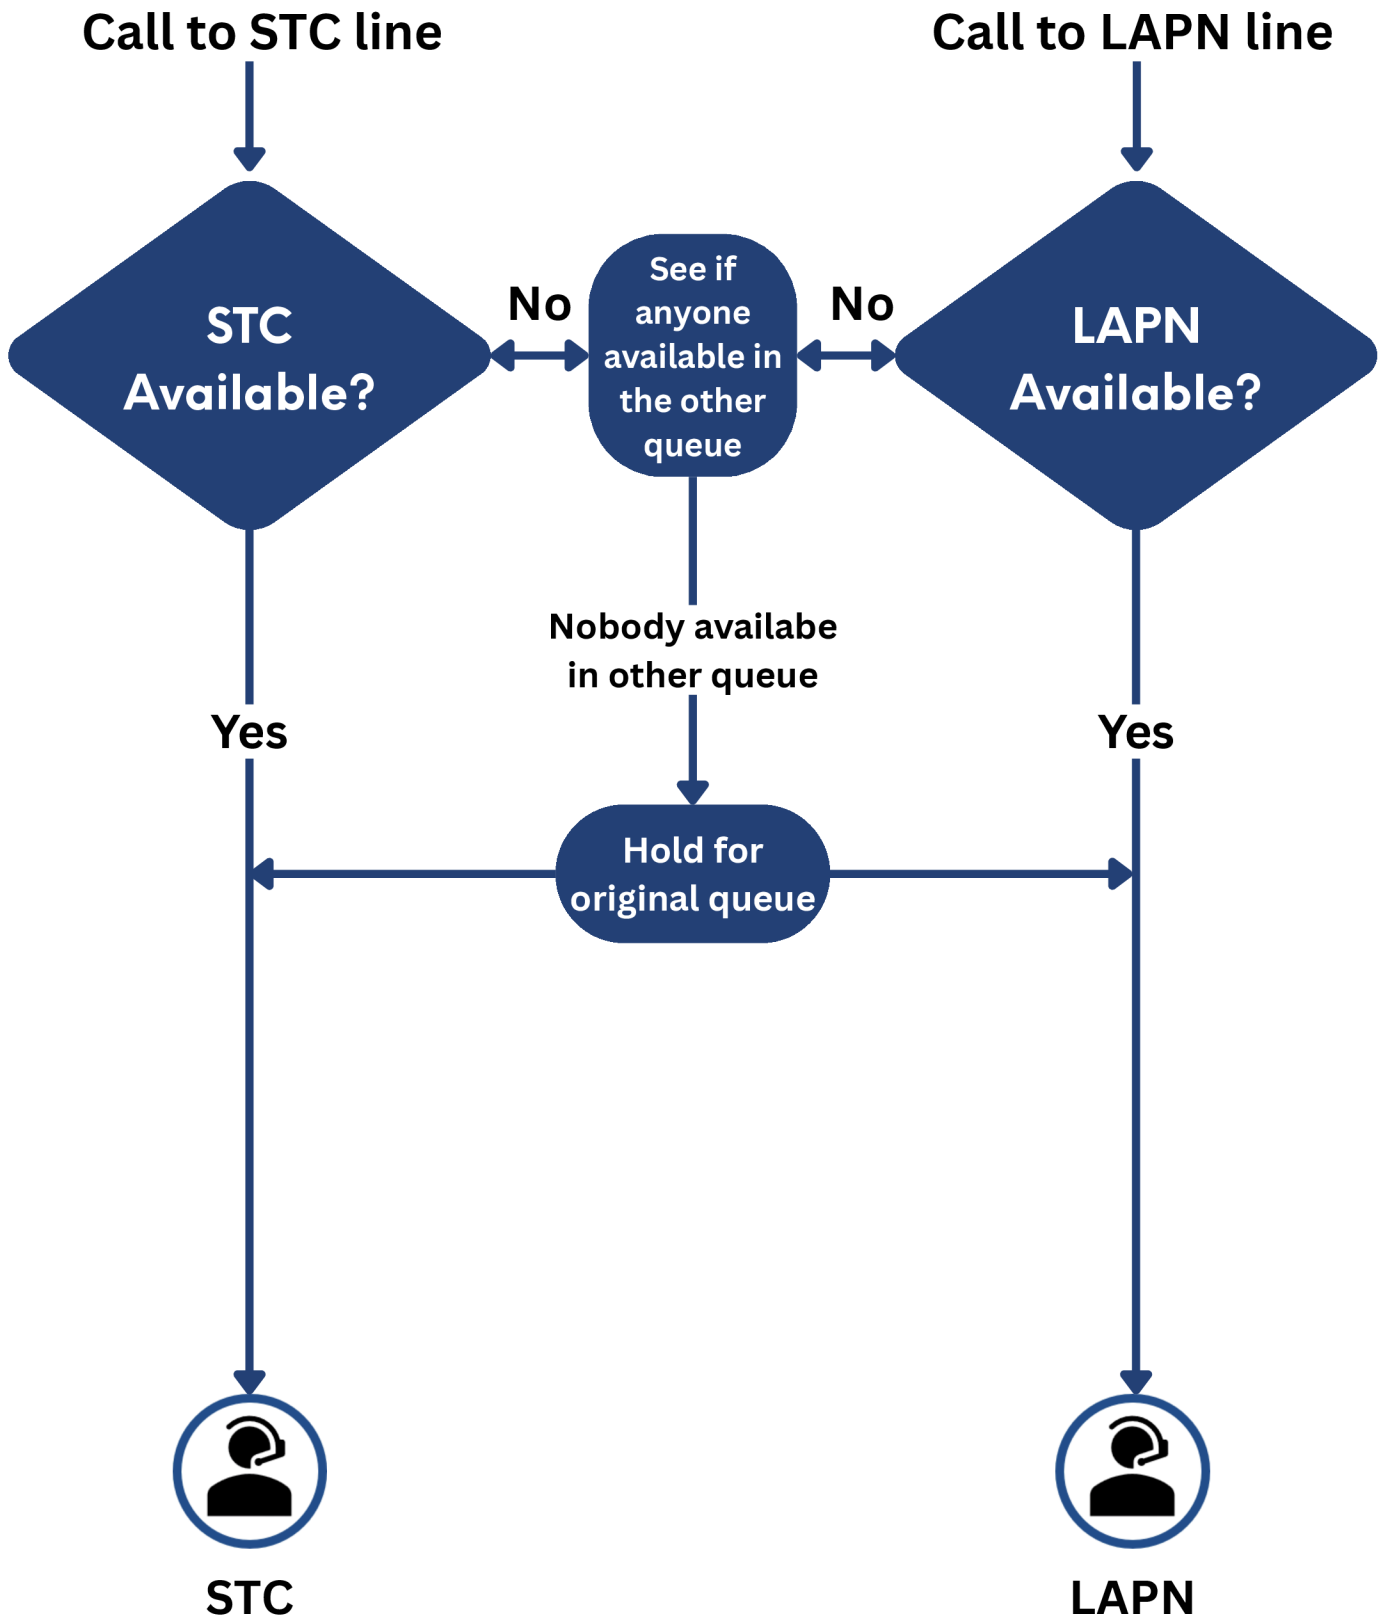

Diagram

