
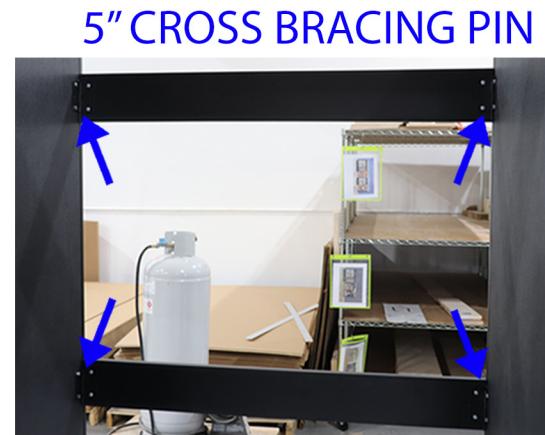


# **VALUE GRID INSTRUCTIONS**

## **1. ASSEMBLE PANELS IN ORDER**

Each panel is labeled in numerical order and should be assembled starting for 1 and so forth. Side panels connect to back panels by sliding a 20" pin through the designated hinges as shown below. Side Panels also connect to cross bracing by sliding a 5" pin through the designated hinges on the panels and cross bracing.

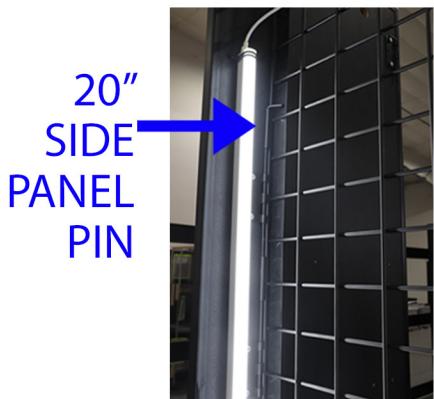

## **2. ATTACH HEADER PANELS**

Connect the back headers to the side panels by sliding a 5" pin through the designated hinges on the side panel. After your back headers are connected the front header can be hung on the back header.



FRONT PANEL  
HANGS ON BACK PANEL



## **3. ATTACH COUNTER TOP**

The counter top sits on top of the designated hinges on the side panels of the market, by sliding a 20" pin through the hinges and tubing on both sides of the counter top underneath.


20" COUNTER TOP PIN



# **VALUE GRID INSTRUCTIONS**

## **4. PLUG LIGHTS INTO CORDS**

Connect the cord on the back panel to the lighting on the side panel.

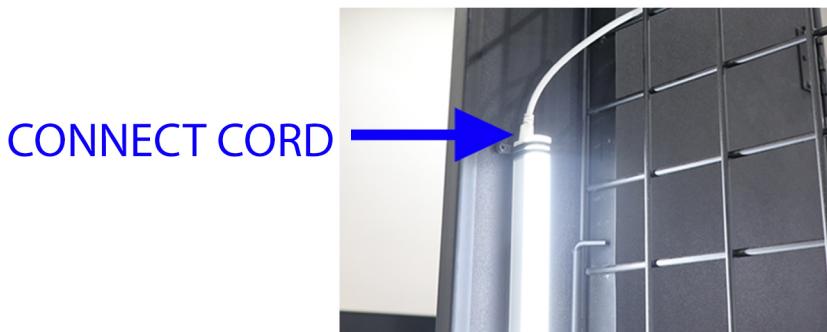

## **5. HANGING BACK WALL GRAPHICS**

Hanging graphic has a plank attached to the top that is designed to sit in the brackets on the side panel.

BACK VIEW

HANG  
PLANK  
W/BACK  
GRAPHIC



FRONT VIEW




BACK VIEW

## **6. PLACE SHELVING THEN ADD PRODUCT**

To insert shelves loosen the designated bolts on side side panel enough for the shelf to slide on to bolts.



# SIDE PANEL

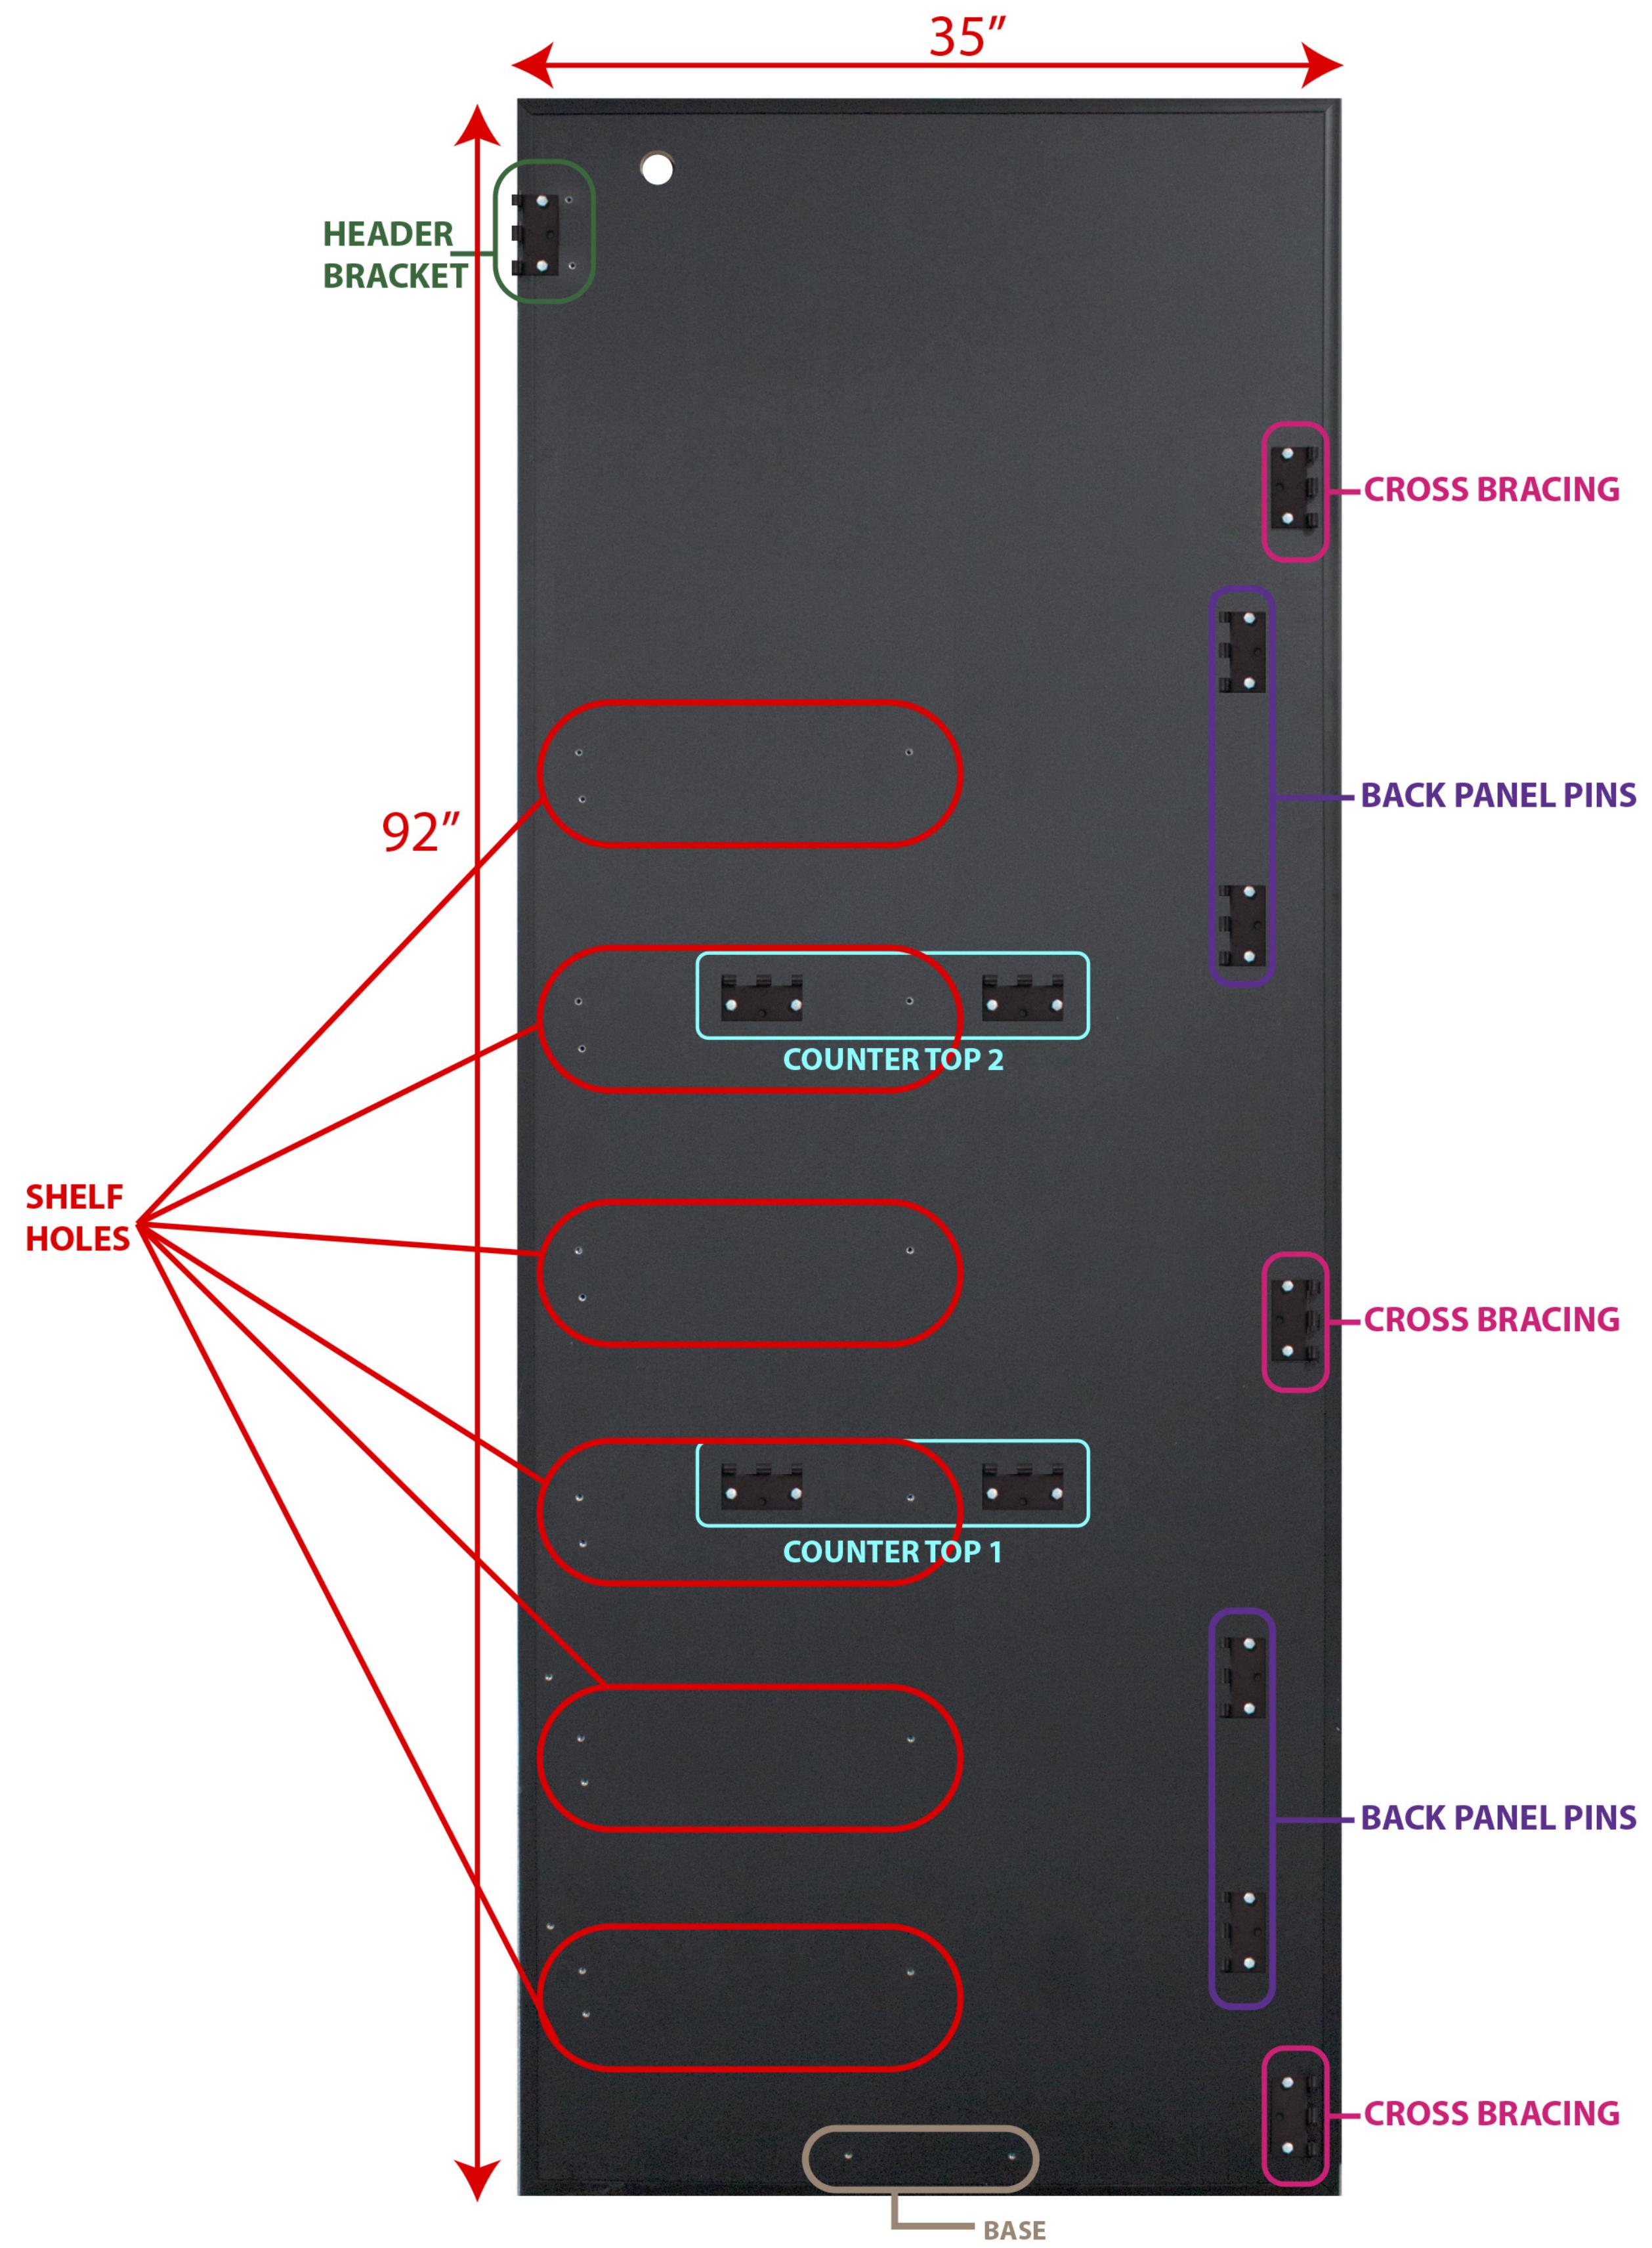

# BACKVIEW-COOLERS



# FRONTVIEW-COOLERS

