BITWIG STUDIO CONTROLLER EXTENSION

Softube
Console 1 Mk III

BITWIG

Overview / Setup

This document gives you a brief overview of the functions of Softube Console 1 Channel Mk III or Fader Mk III with Bitwig Studio. For a detailed explanation of all controller functions, please read the Console 1 user guide provided by Softube.

Parameter Control

The following track parameters can be controlled with Console 1:

- Volume
- Pan Position
- Send Level 1-6
- Mute
- Solo
- Track Select

Furthermore, the track names, numbers, and colors are synchronized between Bitwig Studio and Console 1 as well as the visibility of group tracks and tracks of layered devices.

Direct DAW Control

Console 1 has two levels of DAW Control: DAW Control using VST3 and "Direct DAW Control." DAW Control using VST3 allows you to control all tracks that are running an instance of the Console 1 plug-in, while "Direct DAW Control" will give you access to all tracks of your project. "Direct DAW Control" is made possible by activating the Console 1 Mk III Controller Extension in Bitwig Studio.

Setup

Before starting Bitwig Studio, please make sure you have installed the latest version of the Console 1 Mixing System software (2.6.30 or higher) and the latest firmware version (21.0.1 or higher).

On Windows a Console 1 Channel or Fader Mk III unit should be detected and set up automatically when it is connected. On macOS or if you use more than one unit you need to add the device(s) manually:

- Connect your Console 1 Channel or Fader Mk III unit(s) to your computer and start Bitwig Studio
- Open the *Dashboard* and navigate to *Settings > Controller*
- Click on *Add Controller* on the bottom of the page and select *Softube* in the Hardware Vendor drop-down menu:

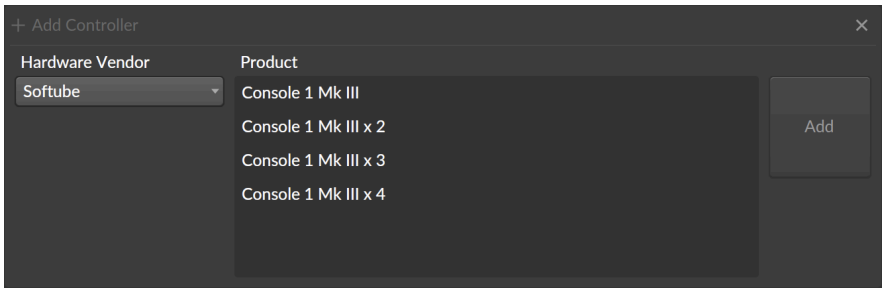

- If you have a single Channel or Fader unit, select *Console 1 Mk III* in the Product list and click *Add*
- If you have more than one unit, select the entry that matches the total number of connected units and click *Add*. You can use up to four Fader Mk III units or combine a single Channel Mk III unit with up to three Fader Mk III units.
- Select the DAW port(s) of your unit(s) in the MIDI input and output drop-down menu. If you are using more than one unit, make sure the order of the input ports matches the order of the output ports:

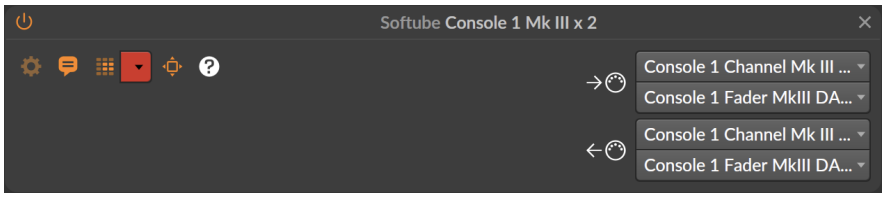

Console 1 Channel Mk III

Below is a list of all Bitwig Studio mixer parameters that can be controlled with Console 1 Channel Mk III. For a detailed explanation of all Console 1 functions like display options, favorites, groups, and the various tone-shaping sections of the Console 1 plug-in, please read the Console 1 user guide provided by Softube.

1 Add Console 1 Plug-in

Press LOAD STRIP/SECTION to add a Console 1 plug-in to the currently selected track. If the track already contains other devices or plug-ins, Console 1 will be added as the last plug-in the device chain.

2 Switch Track Bank/Track Select

Press < or > to select the previous or next bank of 20 tracks (if the project contains more than 20 tracks).

Hold SHIFT and press < or > to select the previous or next track.

3 Track Select

Press one of the 20 Track Buttons to select a track.

The status of group tracks or tracks with layered devices will always be in sync: If, for example, the single tracks inside a Drum Machine device are shown in Bitwig Studio's Mix View, they will also appear on Console 1.

Please note that tracks inside layered devices are not visible in the Arrange View.

4 Volume Knob Mode

Press SEND 1-3 (4-6 while holding SHIFT), MAIN OUT VOLUME or VOLUME to assign that parameter to the Volume Knob.

To assign Bitwig Studio's Master Track to the Main Out Volume, hold the MAIN OUT VOLUME button and press the track select button of the Master Track (the rightmost track in the mixer).

5 Pan

Turn PAN to adjust the pan position of the currently selected track.

6 Solo

Press SOLO to solo the currently selected track.

7 Mute

Press MUTE to mute the currently selected track.

8 Volume/Send Level

Turn VOLUME to adjust the Volume or Send Levels of the currently selected track or the Main Out Volume, depending on the assigned parameter.

Console 1 Fader Mk III

Below is a list of all Bitwig Studio mixer parameters that can be controlled with Console 1 Fader Mk III. For a detailed explanation of all Console 1 functions like display options, favorites, groups and the various tone-shaping sections of the Console 1 plug-in, please read the Console 1 user guide provided by Softube.

1 Fader Mode
Press PAN, SEND 1-3 (4-6 while holding SHIFT), or VOLUME to assign that parameter to the Faders.

2 Solo
Press SOLO to solo tracks.

3 Mute
Press MUTE to mute tracks.

4 Volume/Pan/Send Levels
Move the faders to adjust the Volume, Pan, or Send Levels of the currently selected bank of 10 tracks, depending on the assigned parameter.

5 Track Select
Press one of the 10 Track Buttons to select a track.

The status of group tracks or tracks with layered devices will always be in sync: If, for example, the single tracks inside a Drum Machine device are shown in Bitwig Studio's Mix View, they will also appear on Console 1.

Please note that tracks inside layered devices are not visible in the Arrange View.

6 Add Console 1 Plug-in
Press LOAD STRIP/SECTION to add a Console 1 plug-in to the currently selected track. If the track already contains other devices or plug-ins, Console 1 will be added as the last plug-in the device chain.

7 Switch Track Bank
Press < or > to select the previous or next bank of 10 tracks (if the project contains more than 10 tracks).

8 Pan
Turn PAN to adjust the pan position of the currently selected track.