

# HWRS 561b: Physical Hydrogeology II

## Pore scale fluids distribution

### Agenda:

1. Air-water interface
2. Capillarity

# Air-water system in capillary tubes

---

HWRS 561b  
Bo Guo  
Spring 2026




1. Why does the water try to hold together?
2. Why does the water not wet the surface?

# Air-water system in capillary tubes

---

HWRS 561b  
Bo Guo  
Spring 2026

**SURFACE  
TENSION**

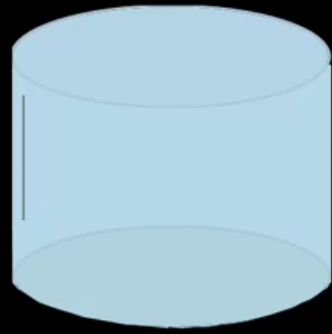

Link to the video: <https://youtu.be/zMzqiAuOSz0>


# Air-water system in capillary tubes

- Two and three phase systems: water, oil, air
- *Interfacial tension (cohesive forces between fluid molecules)*




How to measure interfacial tension?


Drop weight method

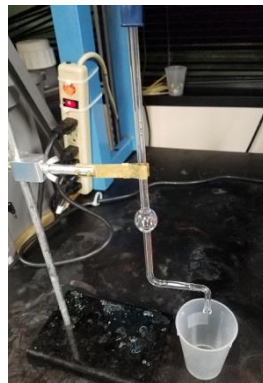

ring method

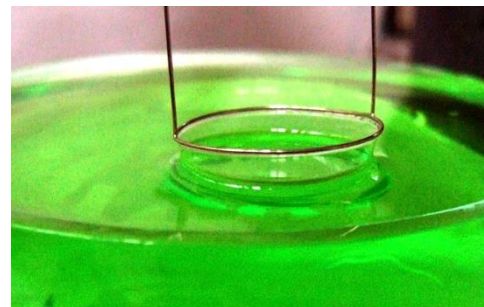

Wilhelmy plate

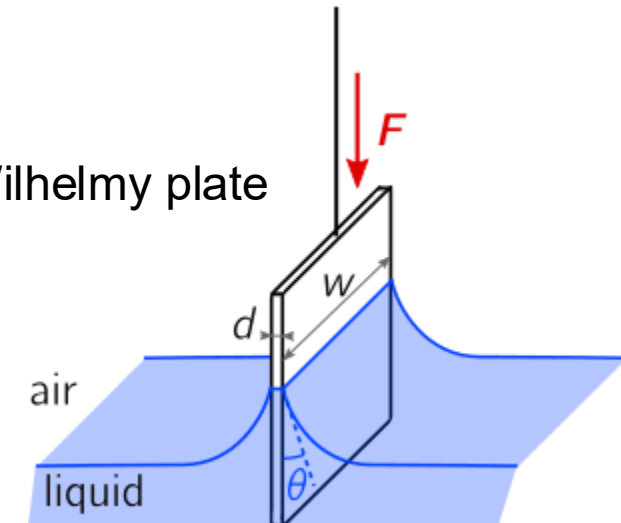


Typical values of surface tension:

air-water	0.072 N/m
oil-water	0.20 N/m
oil-water w/ soap	0.0001 N/m

# Air-water system in capillary tubes

- *Wettability (adhesive forces between the fluid and solid surface)*

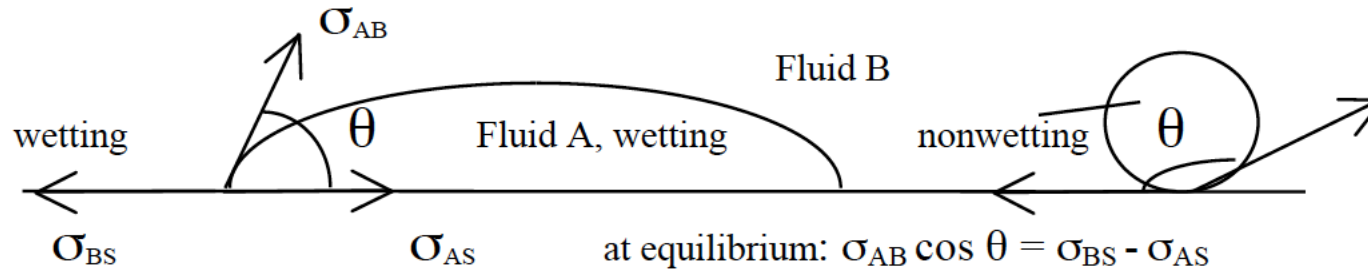


$\theta < 90^\circ$ : fluid A is wetting with respect to fluid B on the solid S  
 $\theta > 90^\circ$ : fluid A is nonwetting with respect to fluid B on the solid S

Wettability is a function of the fluid properties, soil properties, and history of contact. For most soils, the relative wettabilities are: water > oil > air

Recommended video for the concepts of *viscosity, cohesive and adhesive forces, surface tension, and capillary action* [https://www.youtube.com/watch?v=P\\_jQ1B9UwpU](https://www.youtube.com/watch?v=P_jQ1B9UwpU)

# Air-water system in capillary tubes

Capillary pressure (difference between the nonwetting and wetting phase pressures)

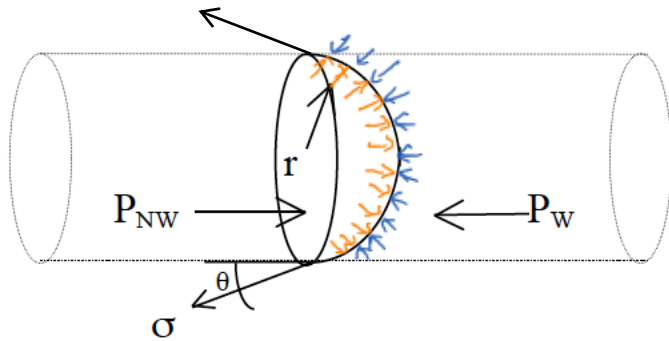

Force balance at equilibrium:

$$2\pi r \sigma \cos \theta = \pi r^2 P_{nw} - \pi r^2 P_w \Rightarrow P_{nw} - P_w = \frac{2\sigma \cos \theta}{r}$$

$$\Rightarrow \boxed{P_c = \frac{2\sigma \cos \theta}{r}} \quad \text{Young-Laplace Equation.}$$

1°. More general equation for any nw-w interface:  $P_c = \sigma \left( \frac{1}{r_1} + \frac{1}{r_2} \right)$

2°. For a perfectly wetting fluid,  $P_c = \frac{2\sigma}{r}$   
( $\theta = 0$ )

For the capillary tube:  
 $r_1 = r_2 = r / \cos \theta$


# Air-water system in capillary tubes

---

HWRS 561b  
Bo Guo  
Spring 2026


## Capillary pressure

Pressure jump across a  
fluid-fluid interface



## Young-Laplace Equation

Pressure jump across a fluid-fluid interface is  
determined by interfacial tension + geometry  
of the interface (radii of the curvature)



# Art of porous media flow

---

## Optional, but strongly encouraged, Mini-project

Take a photo or a video ( $< 2$  min) in your day-to-day life that you think best illustrates some cool phenomena of porous media flow.


I will create a dropbox on D2L for you to upload the photo or video (due **April 26**).

Depending on the quality of your picture or video, you can receive up to 5 bonus points in your final grade (out of 100 points).



# Air-water system in capillary tubes

Capillary rise in a Capillary tube

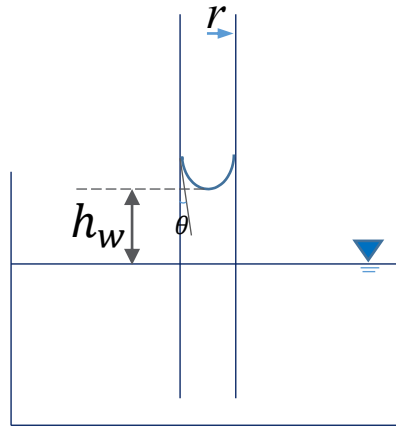

At the water table:

$$\left. \begin{array}{l} p_a = 0 \\ p_w = 0 \\ z = 0 \end{array} \right\} \Rightarrow H = 0$$

At the air-water interface in the tube:


$$\left. \begin{array}{l} p_a = 0 \\ z = h_w \\ H = 0 \end{array} \right\} \Rightarrow \phi = -h_w \Rightarrow p_w = -\rho_w g h_w$$

$$\left. \begin{array}{l} p^{cap} = p_a - p_w = 0 - (-\rho_w g h_w) = \rho_w g h_w \\ \text{Young-Laplace eqn: } p^{cap} = \frac{2\sigma \cos \theta}{r} \end{array} \right\} \Rightarrow$$

$$h_w = \frac{2\sigma \cos \theta}{\rho_w g r}$$

# Air-water system in capillary tubes

Capillary rise in a Capillary tube in the presence of an LNAPL (Assuming zero contacts)

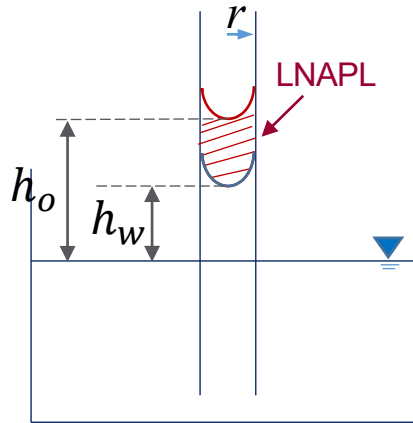

Note: w/o oil ( $\theta=0$ )

$$h_w = \frac{2\sigma_{aw}}{\rho_w g r}$$

At the oil-water interface:

$$P_w = 0 - \rho_w g h_w = -\rho_w g h_w \quad \text{--- (1)}$$

$$P_o = P_{ow}^{cap} + P_w = \frac{2\sigma_{ow}}{r} - \rho_w g h_w \quad \text{--- (2)}$$

continuing through the oil to the oil-air interface,  
the oil pressure

$$P_o = \frac{2\sigma_{ow}}{r} - \rho_w g h_w - \rho_o g (h_o - h_w) \quad \text{--- (3)}$$

At the oil-air interface:


$$P_o = 0 - P_{oa}^{cap} = -\frac{2\sigma_{oa}}{r} \quad \text{--- (4)}$$

$P_o$  in (3) and (4) are equal  $\Rightarrow$

$$h_w = \left( \frac{2\sigma_{ow}}{r} + \frac{2\sigma_{oa}}{r} - \rho_o g h_o \right) / (\rho_w g - \rho_o g)$$

# Air-water system in capillary tubes

*Invasion of a nonwetting fluid into a pore (Assuming zero contacts)*

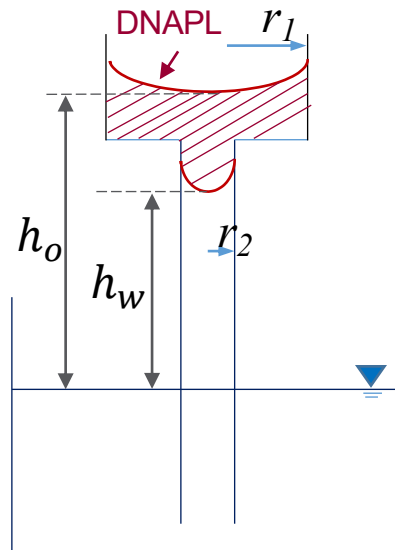

At the air-oil interface:

$$P_o = P_a - p_{oa}^{cap} = - \frac{2\sigma_{oa}}{r_1}$$

continuing down to the oil-water interface, the pressure of oil is:

$$P_o = - \frac{2\sigma_{oa}}{r_1} + (h_o - h_w)\rho_o g$$

At the oil-water interface:


$$\begin{cases} p_{ow}^{cap} = P_o - P_w = - \frac{2\sigma_{oa}}{r_1} + (h_o - h_w)\rho_o g + \rho_w g h_w \\ p_{ow}^{cap} = \frac{2\sigma_{ow}}{r_2} \end{cases}$$

$$\Rightarrow h_o - h_w = \left[ \frac{2\sigma_{ow}}{r_2} + \frac{2\sigma_{oa}}{r_1} - \rho_w g h_o \right] / (\rho_o g)$$

$$\Rightarrow h_w = \left[ \frac{2\sigma_{ow}}{r_2} + \frac{2\sigma_{oa}}{r_1} - \rho_o g h_o \right] / [(\rho_w - \rho_o)g]$$

# Air-water system in capillary tubes

*Model of a porous medium as a Bundle of Capillary Tubes*

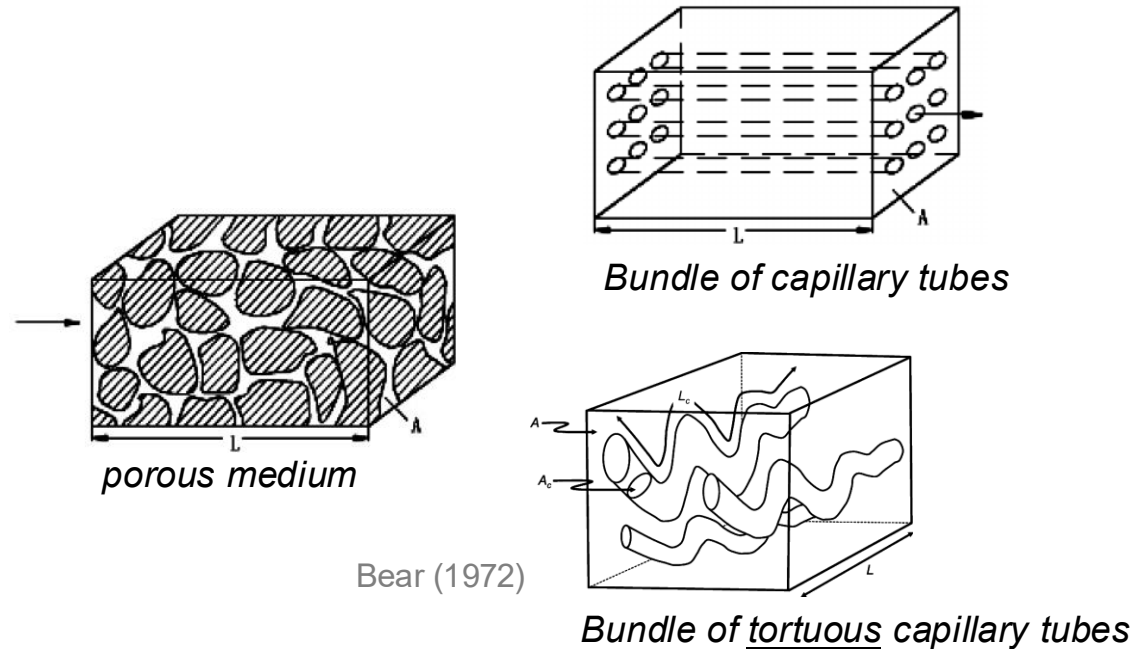


❖ Very simplified model, but its application has tremendously improved our understanding of fluid flow and transport phenomena in porous media.

Some examples:


- Permeability (already discussed)
- Dispersion (already discussed)
- Fluid invasion
- Capillary transition zone
- Soil water characteristic curve
- Relative permeability

# Air-water system in capillary tubes

*Invasion of a nonwetting fluid into an aquifer*

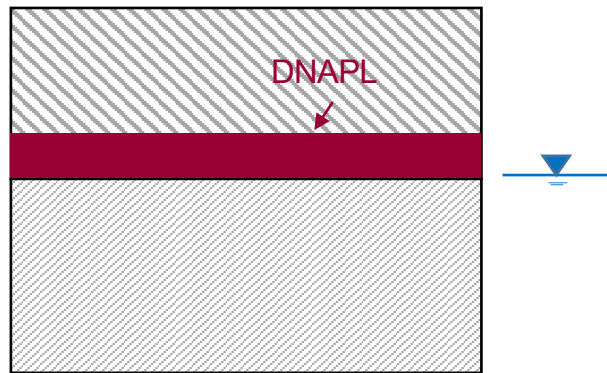

Representing the aquifer as a bundle of capillary tubes

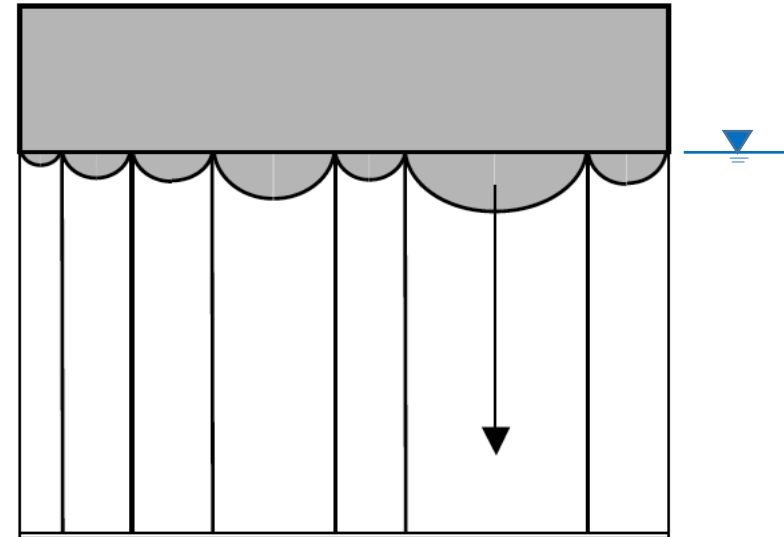

1. Which is easier for DNAPL to invade?


Coarse sand or fine-grained medium?

2. For some reason, if DNAPL modifies the wettability of the porous medium grain surfaces, e.g., the contact angle of water increases from  $0^\circ$  to something between  $0^\circ$  and  $90^\circ$ .

What may happen to the DNAPL?


# Air-water system in capillary tubes

*Water retention (or capillary transition zone) in the vadose zone*

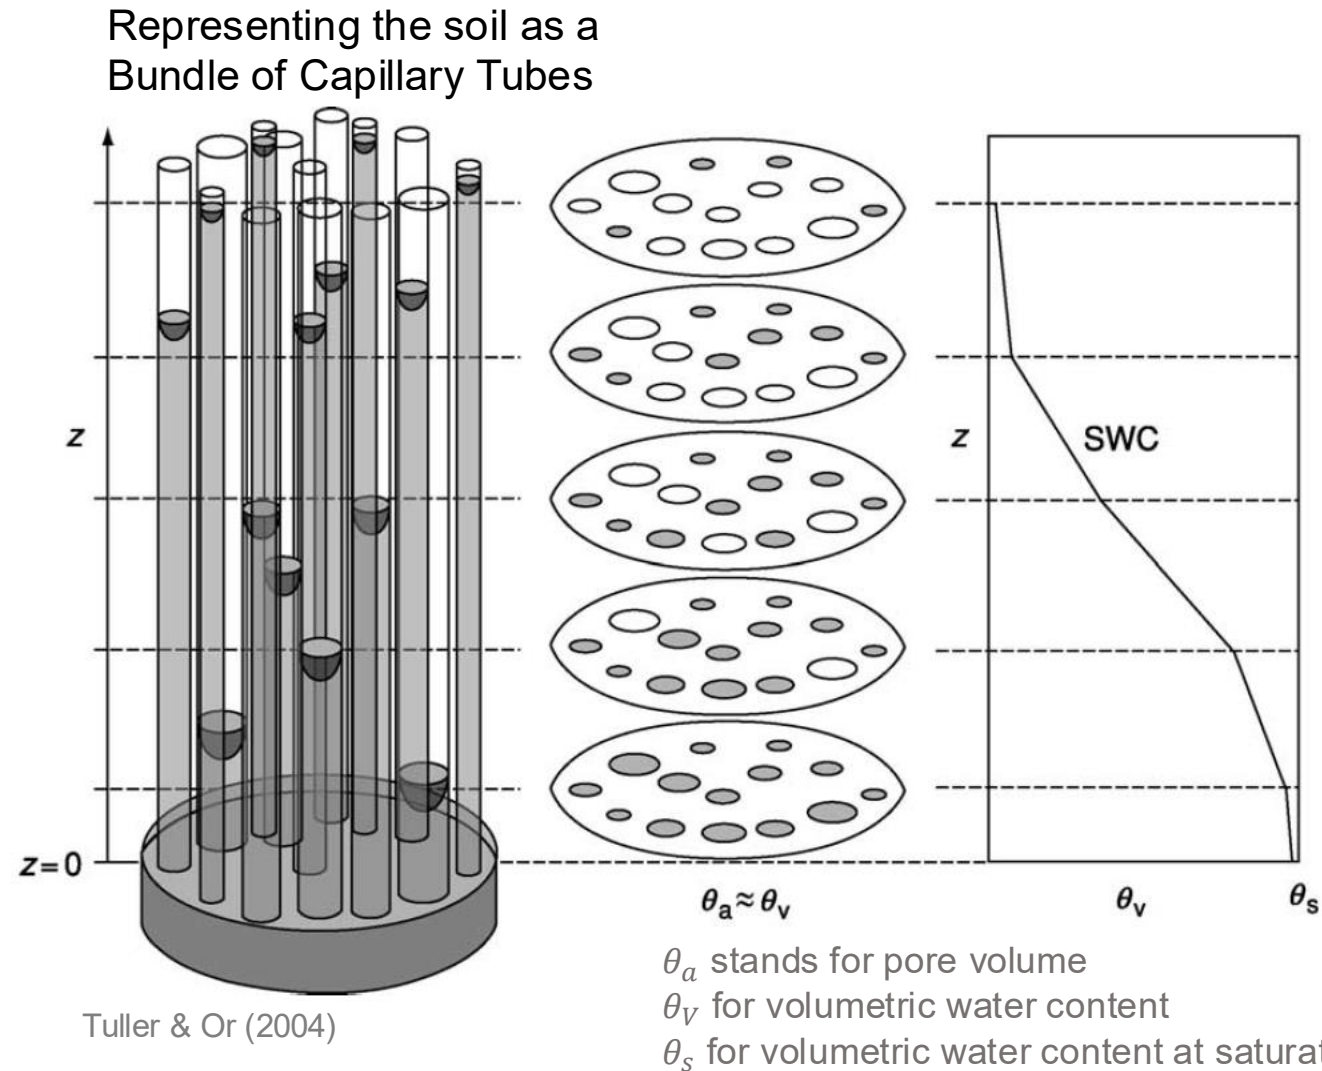

# Air-water system in capillary tubes

*Bundle of triangular capillary tubes vs. bundle of cylindrical capillary tubes*

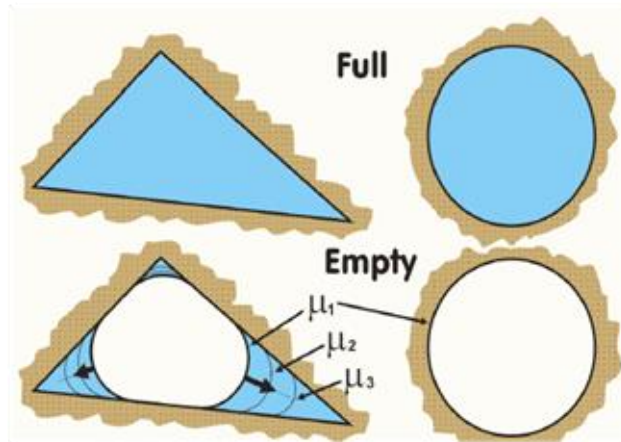

Tuller, Or, Dudley (1999)


Bundle of triangular capillary tubes model have several advantages:

1. Can represent thin films and corner fluid
2. Saturation-dependent capillary pressure within a single-pore
3. More realistic representation of pore geometry
4. ...


# Air-water system in capillary tubes

HWRS 561b  
Bo Guo  
Spring 2026

An example study using the bundle of triangular capillary tubes model to examine the impact of surface roughness on fluid-fluid interfacial areas  $A_{aw} = A_{aw}(S_w)$

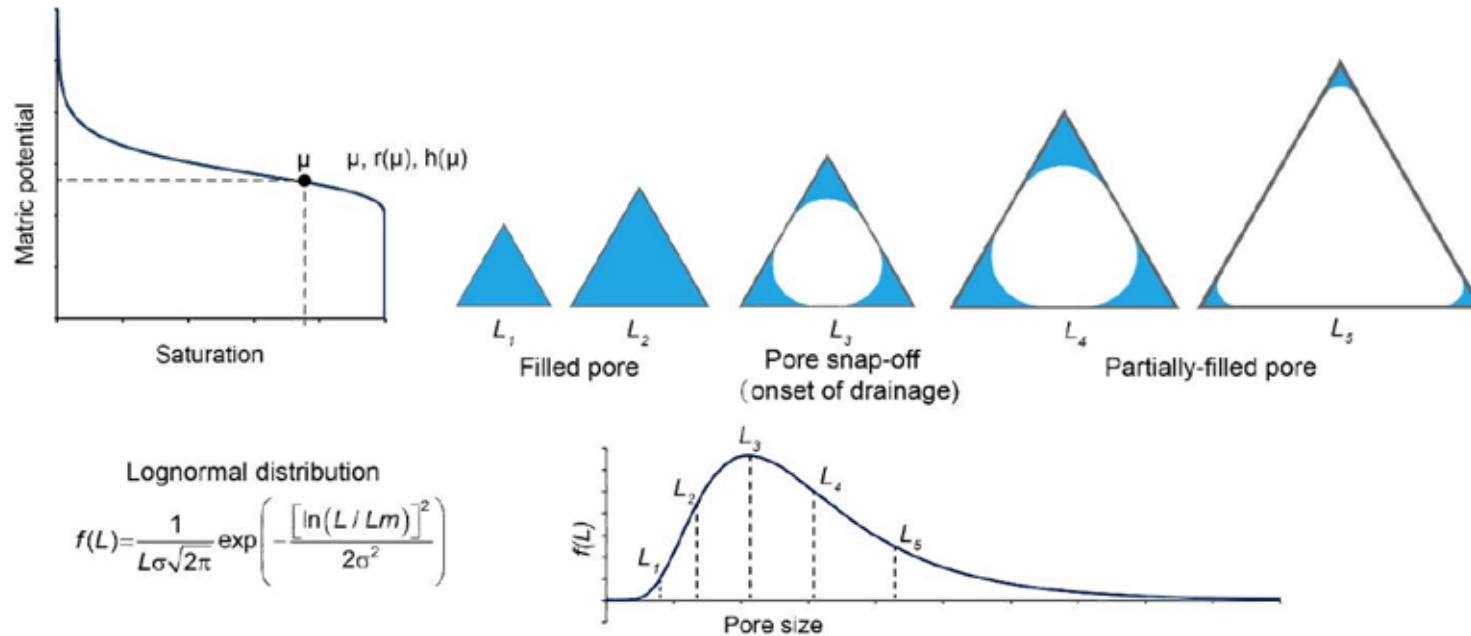

Simulating the soil-water characteristics

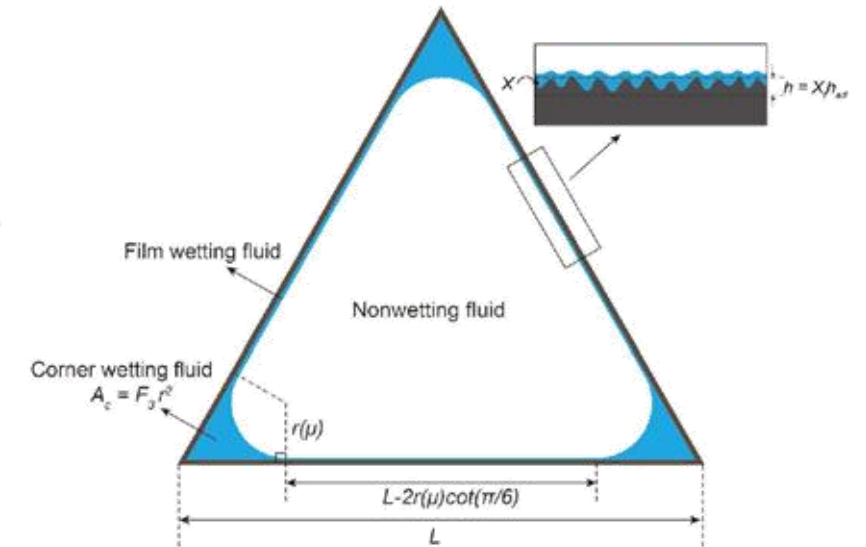

Representing the surface roughness and films