VYANET

Quick Setup Guide

Wireless IP Camera




V1.0

Setting Up Your Vyanet Security Camera

1. Getting Started


■ Package Contents

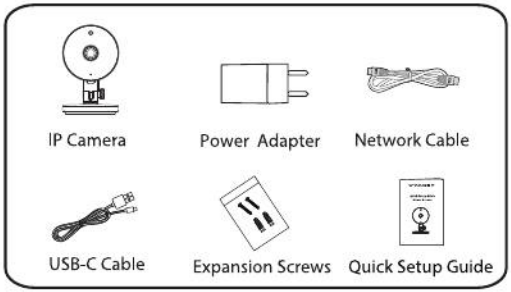


■ Safety Tips

- Please change the camera's password regularly, using a combination of numbers, letters and special characters.
- We recommend that you regularly update your camera with the latest available software and firmware to ensure the best experience with your camera.
- For indoor use only.

2. Physical Description

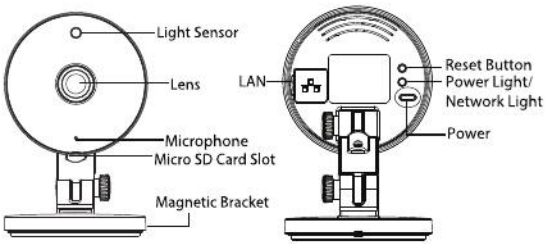

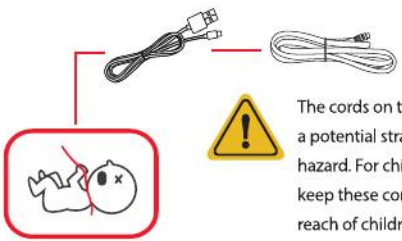

The cords on this product are a potential strangulation hazard. For child safety, please keep these cords out of the reach of children.

3. Setting Up Your Camera: Connection via the Vyanet App (Recommended)

Before You Get Started

Scan the QR code below to download and install the Vyanet APP.

VYANET

GET IT ON Google Play

Available on the App Store

VYANET Mobile App


To ensure a smoother video experience on your smart phone, it is recommended that your smart phone meet the following specifications:

- iOS: version 12.1 or higher.
- Android: 6.0 or higher, using a device with a Graphics Processing Unit (GPU).

Note: Vyanet recommends frequently checking for updates in the mobile device store to ensure your application stays current with feature and security updates.

■ Wi-Fi Connection

1. Plug the power adapter into the camera and wait until a voice prompt is heard of "**Ready for Wi-Fi configuration**".



Tips: If you didn't hear the voice prompt, press and hold the reset button for 3~5 seconds to reset the camera.

2. Make sure that your mobile device is connected to your Wi-Fi network and Bluetooth is turned on.




Note: Bluetooth is a new enhancement added for this camera to assist in the installation process. To utilize this enhancement, Bluetooth must be enabled on a mobile device before installation begins.


3. Open the Vyanet App and either register for a new account or sign in using an existing account.



Tips: It is suggested to store the username and password created safely, as the username and password will be needed in the future for installing any additional Vyanet cameras or network video recorders.


4. Follow the steps below:

























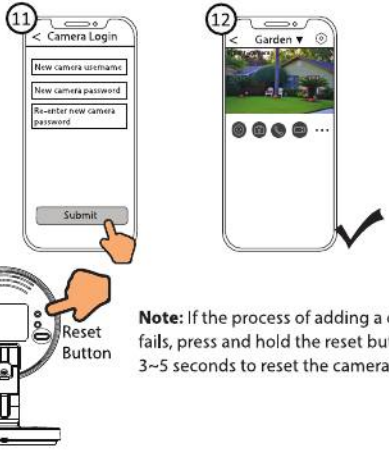

Note: If the process of adding a camera fails, press and hold the reset button for 3~5 seconds to reset the camera.


4. Hardware Installation

- If mounting to a metal surface, unfold the built-in magnetic base away from the camera and place the base against a metal surface to mount the camera into the desired position.



- Use the following steps if installing on a wall or ceiling using the included expansion screws to mount.

1. Rotate the base of the camera until points a and b are aligned, allowing the mounting plate to be removed.
2. Install the mounting plate on a wall or ceiling with the supplied expansion screws.
3. Align points a and b to insert the camera base to the mounting plate. Rotate so that points a and b are no longer aligned, which attaches the camera securely to the base.



5. Connecting your Camera to a Computer

■ Vyanet VMS

Vyanet VMS is software for use on a Windows or a MacOS computer. This software does not require the need for additional plug-ins to operate. Vyanet VMS for Windows can be downloaded at **https://www.vyanet.com/software**. For Vyanet VMS for MacOS, the Apple App Store can be used to download and install.

Note: Vyanet VMS will be updated at regular intervals. Please check on occasion when using to ensure this application remains current.

Add the IP Camera

1. Open Vyanet VMS, and enter Vyanet Cloud credentials or create a local administrator account within Vyanet VMS.
2. Tap the "+" icon on the Vyanet VMS and follow the setup wizard to add your camera.




6. Important Information

■ Camera Username & Password

The camera username & password are used to access and manage your camera. A strong password will significantly improve the security of your camera.

If you have forgotten either of them, please press the reset button.



Press the reset button on the back of the camera and hold for 3~5 seconds to factory reset. A "**Reset Succeeded**" voice prompt will be heard when successful.

■ Replacement of Storage Media

Your camera supports event storage through an NVR or using the Micro SD card slot found on the back of the camera. The Micro SD card must be formatted to FAT32 or exFAT file systems to be usable.



NVR



Micro SD card
(FAT32 & exFAT)

■ Format the Micro SD Card to FAT32

① Purchase a new 16GB or greater Micro SD card



② Insert new Micro SD card into a Micro SD to USB card reader



3. Insert the USB card reader into a computer



4. Download a FAT32 format tool or use the Vyanet FAT32 Format Tool found here:


https://www.vyanet.com/software

5. Run the downloaded FAT32 tool



Note: Always use caution when formatting any drive. Check to always ensure the correct drive is selected. Not selecting the correct drive when performing a format will result in permanent data loss.


6.



7.



8.




9.



10.



11.



7. Product Specifications

WLAN frequency range: 2412MHz - 2472MHz and 5725MHz - 5850MHz

Bluetooth Frequency Range: 2400-2483.5MHz

Maximum transmission power: < 18.5dBm

Wireless Standard: IEEE802.11b/g/n (2.4GHz) IEEE802.11a/n/ac (5GHz)

Power Supply: DC 5V 1.0A 5W

8. FAQs

■ IP cameras is not powering on

If you find your camera is not powering on, please the check following:

1. Please check whether the outlet is working properly or not. Try to plug the camera into a different outlet and see whether it will work.
2. Please check to see if the power adapter is working correctly. If there is a different USB-C power adapter available, connect this power adapter to the camera to see if the issue is corrected.
3. If it still won't work, please contact Vyanet support.

■ How to re-configure the Wi-Fi connection for Vyanet cameras after a Wi-Fi password or SSID name change?

1. Press the reset button on the back of the camera and hold for 3~5 seconds to factory reset. A "**Reset Succeeded**" voice prompt will be heard when successful.
2. Open the Vyanet app and scan your camera's QR code.
3. Verify to make sure that your mobile device is connected to the same Wi-Fi network as the camera.

VYANET

Vyanet Operating Group, Inc.
410 SW Columbia St, Ste 120
Bend, OR 97702
(844) 4-VYANET



socworks@vyanet.com
(844) 4-VYANET

VYANET P1 Install

For a more detailed install guide, please refer to the Vyanet P1 Install Guide which can be accessed using this QR Code.

www.vyanet.com