

revv-g4

Project Report

1. Readme

revv-g4

This is a clone of the Revv Amplification G4 overdrive.


This pedal is verified. It is very loud. I tested it 10 on the gain, and 2 or 3 on the volume.

The toggle switch does not change the voicing as much as I thought it would, but overall this gives a nice overdrive/distortion high-gain pedal to be added to my board.


I have not boxed this one yet.

All trademarks belong to their respective owners.


2. Schematic

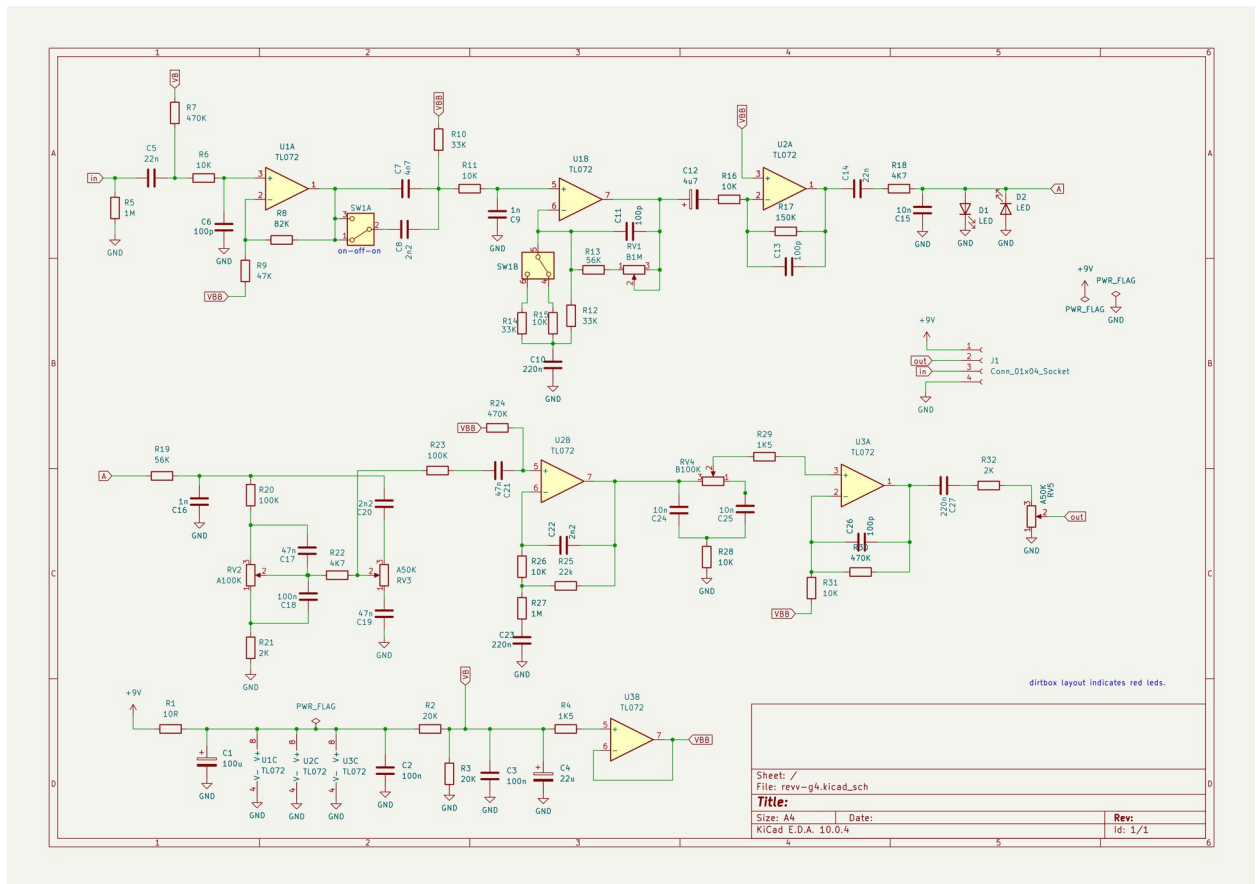

3. PCB F.Cu + Silkscreen

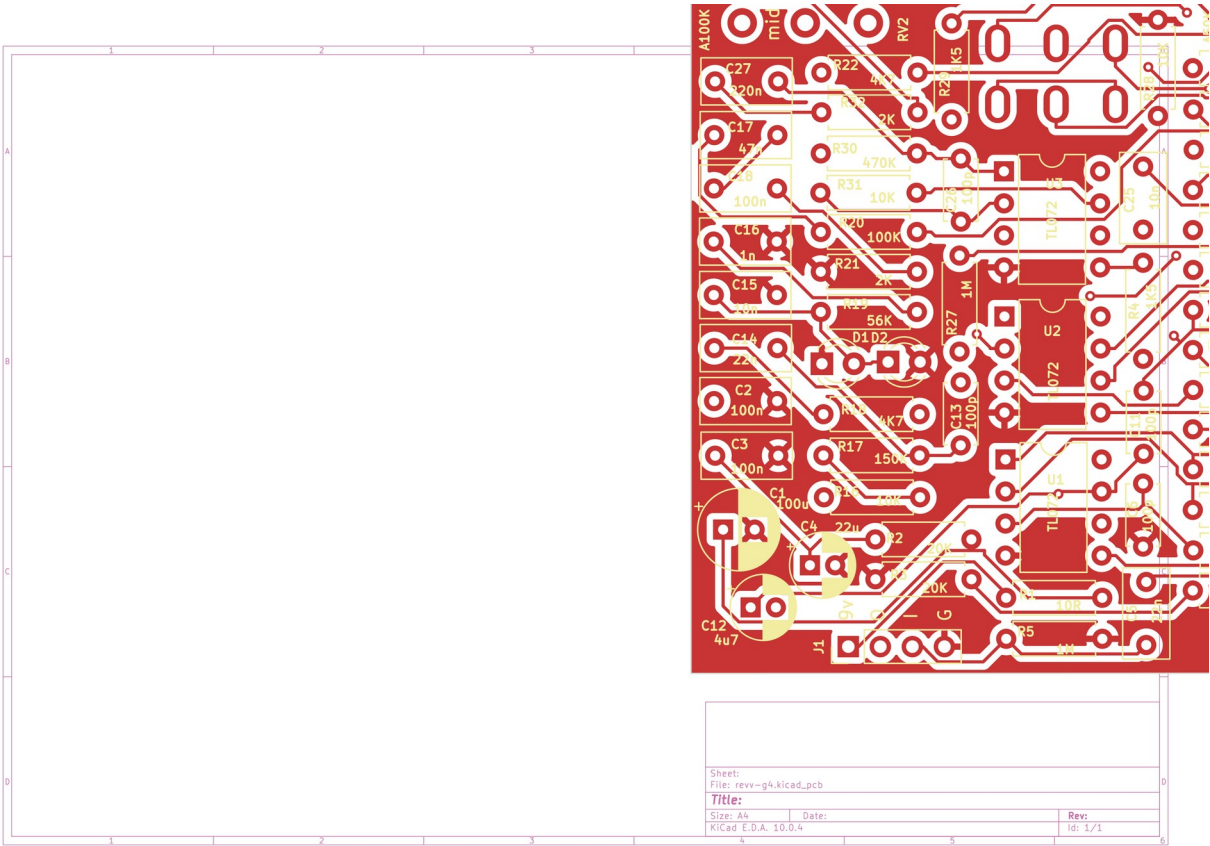

4. PCB B.CU + Silkscreen

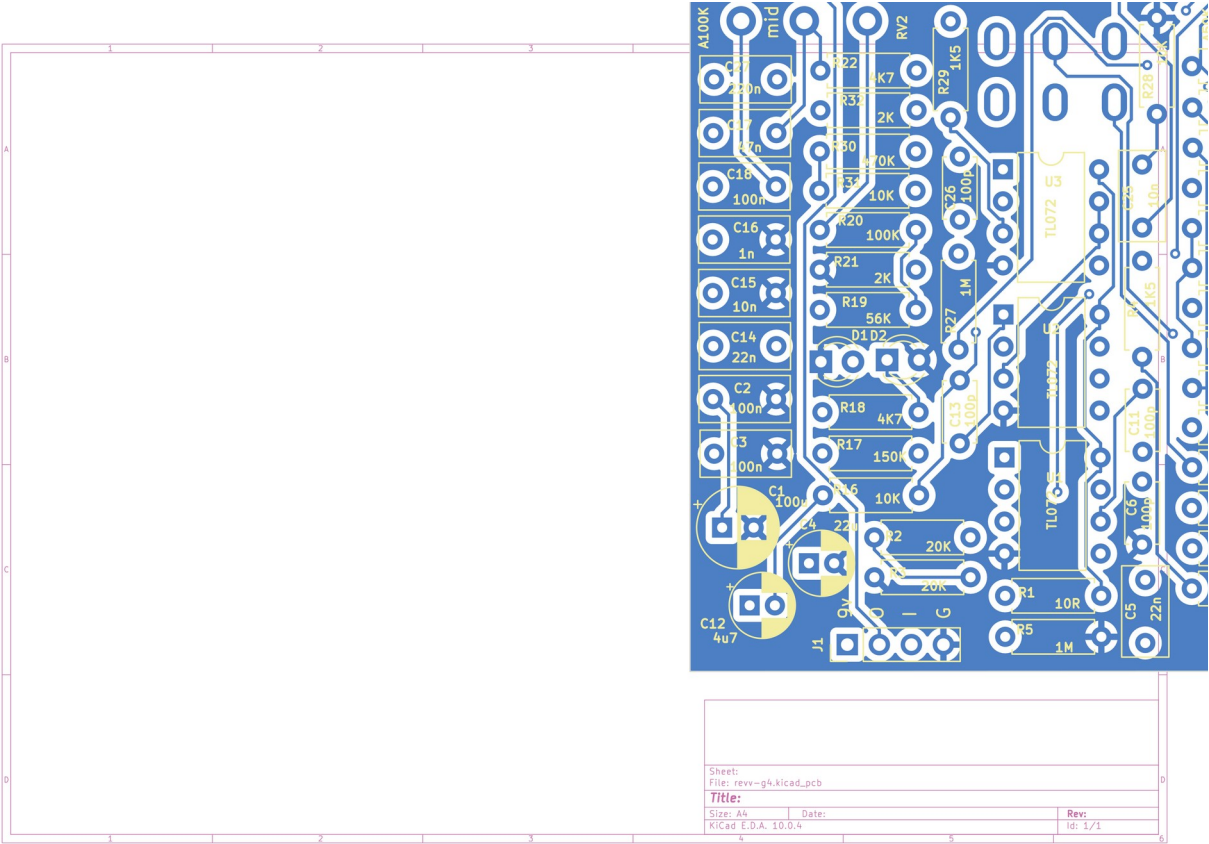

5. Bill of Materials

Reference	Value	Footprint	Qty	DNP
C1	100u	Capacitor_THT :CP_Radial_D6. 3mm_P2.50m m	1	
C2,C3,C18	100n	Capacitor_THT :C_Rect_L7.0m m_W3.5mm_P 5.00mm	3	
C4	22u	Capacitor_THT :CP_Radial_D5. 0mm_P2.00m m	1	
C5,C14	22n	Capacitor_THT :C_Rect_L7.0m m_W3.5mm_P 5.00mm	2	
C6,C11,C13,C26	100p	Capacitor_THT :C_Disc_D4.7m m_W2.5mm_P 5.00mm	4	
C7	4n7	Capacitor_THT :C_Rect_L7.0m m_W3.5mm_P 5.00mm	1	
C8,C20,C22	2n2	Capacitor_THT :C_Rect_L7.0m m_W3.5mm_P 5.00mm	3	
C9,C16	1n	Capacitor_THT :C_Rect_L7.0m m_W3.5mm_P 5.00mm	2	
C10,C23,C27	220n	Capacitor_THT :C_Rect_L7.0m m_W3.5mm_P 5.00mm	3	
C12	4u7	Capacitor_THT :CP_Radial_D5. 0mm_P2.00m	1	

		m		
C15,C24,C25	10n	Capacitor_THT: C_Rect_L7.0mm_W3.5mm_P5.00mm	3	
C17,C19,C21	47n	Capacitor_THT: C_Rect_L7.0mm_W3.5mm_P5.00mm	3	
D1,D2	LED	LED_THT:LED_D3.0mm	2	
J1	Conn_01x04_Socket	Connector_PinHeader_2.54mm:PinHeader_1x04_P2.54mm_Vertical	1	
R1	10R	Resistor_THT: R_Axial_DIN0207_L6.3mm_D2.5mm_P7.62mm_Horizontal	1	
R2,R3	20K	Resistor_THT: R_Axial_DIN0207_L6.3mm_D2.5mm_P7.62mm_Horizontal	2	
R4,R29	1K5	Resistor_THT: R_Axial_DIN0207_L6.3mm_D2.5mm_P7.62mm_Horizontal	2	
R5,R27	1M	Resistor_THT: R_Axial_DIN0207_L6.3mm_D2.5mm_P7.62mm_Horizontal	2	
R6,R11,R15,R16,R26,R28,R3	10K	Resistor_THT: R_Axial_DIN02	7	

1		07_L6.3mm_D 2.5mm_P7.62 mm_Horizontal		
R7,R24,R30	470K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizontal	3	
R8	82K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizontal	1	
R9	47K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizontal	1	
R10,R12,R14	33K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizontal	3	
R13,R19	56K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizontal	2	
R17	150K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizontal	1	
R18,R22	4K7	Resistor_THT: R_Axial_DIN02	2	

		07_L6.3mm_D 2.5mm_P7.62 mm_Horizont al		
R20,R23	100K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizont al	2	
R21,R32	2K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizont al	2	
R25	22k	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizont al	1	
RV1	B1M	pedals:Pot_Un derside	1	
RV2	A100K	pedals:Pot_Un derside	1	
RV3,RV5	A50K	pedals:Pot_Un derside	2	
RV4	B100K	pedals:Pot_Un derside	1	
SW1	SW_DPDT_x2	pedals:SWITC H-M1-DPDT	1	
U1-U3	TL072	Package_DIP: DIP- 8_W7.62mm	3	

Total line items: 35