



Flicker CL (Cell-Locate) 1.0 User Guide

support@celltracktech.com

8/8/2022

Contents

Overview	1
How it Works	2
Technical Specs (based on 3.5g model)	2
Interacting with your Flicker CL	3
Final Thoughts	3

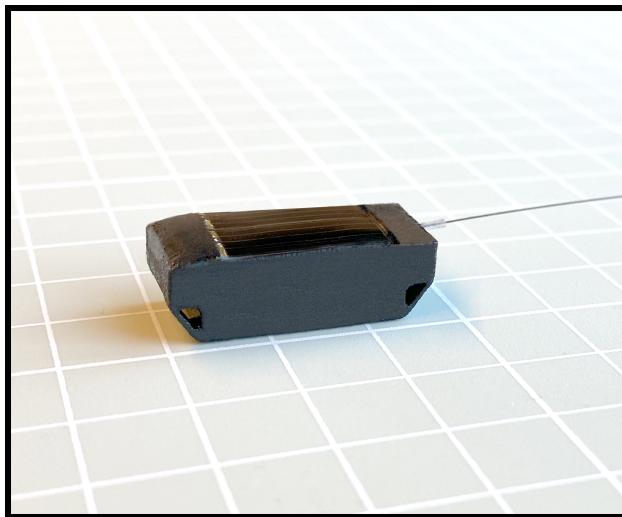


Figure 1: 3.5g Cell-Locate

Overview


The CTT Flicker CL (Cell-Locate) transmitter is the first of its kind to use the global cell network as a means of data transmission and for estimating the location of your tagged animal. In doing so we have reduced the weight of the fully-functional unit to nearly 3 grams and with a programming scheme that can allow over a year's worth of transmissions on a single charge of the battery. Since each device also has a solar panel, any amount of light will extend the life and performance of your Flicker CL device.

How it Works

The device's location is determined by first collecting information about one or more cell towers in the communication range. This information is then immediately transmitted to our data servers using the LTE-M1 cellular network. Finally, our servers generate a location estimate from our extensive tower database. The accuracy of cellular localization is ultimately determined by the geometry of the antenna coverage areas. Some coverage areas will be much smaller, leading to improved accuracy. We provide an uncertainty value with each location, which approximates the size of the coverage area.

Each cell tower can have multiple highly directional antennas that provide coverage for specific regions around the tower. The geometry of these regions is dependent on many factors such as antenna height relative to ground, antenna type, population density, and obstructions (trees, mountains, buildings .. etc). At the time of antenna installation, a fixed location (representative of the antenna region) is paired with the antenna. Our device interrogates the tower for its unique identifier and antenna, then our servers look up the area location from the tower parameters.

An example of the above description can be found in the following figure: The actual location of the device is represented as an American Robin. The cell tower can be found in the center of the multi-colored hexagon. Each of the three quadrilaterals within the hexagon are hypothetical coverage areas of three antennas belonging to the same tower. If the robin falls within one of the areas, the fixed location will be reported as the device's location. From the figure below, the robin fell in the "upper" area (quadrilateral "B"), so the location reported will correspond to the red marker.

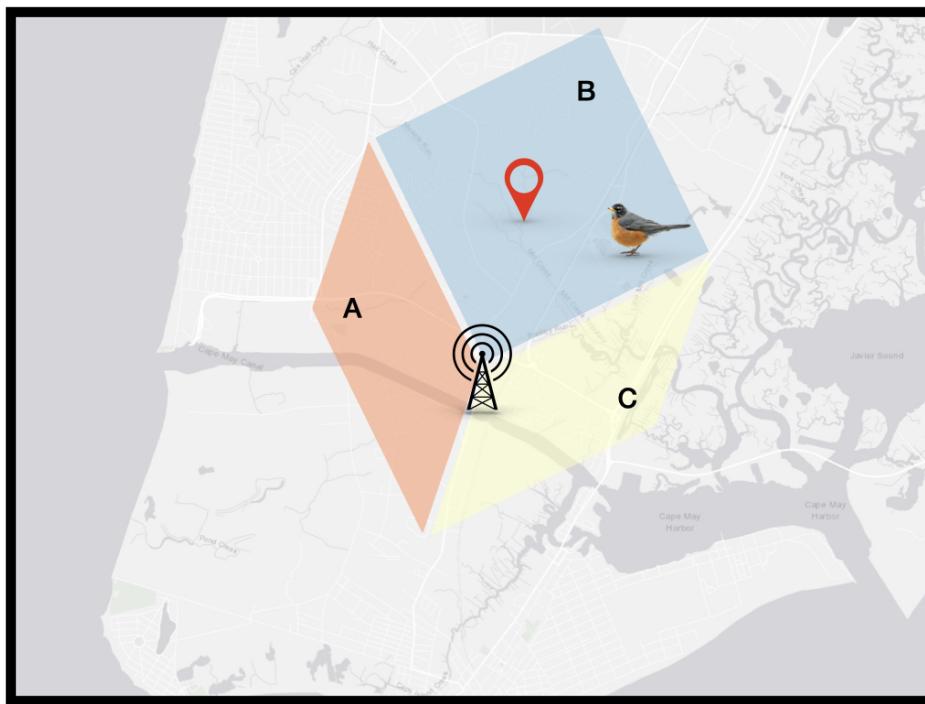

Technical Specs (based on 3.5g model)

- Periodically uploads the following information to CTT data servers via the LTE network.
 - Cell tower information necessary for location approximation.
 - Device identifiers
 - On-board sensor data
 - Firmware-Over-The-Air (FOTA) via CTT data server
 - Configuration Update via CTT data server
 - Location & Connection Interval [sec]
 - Low Battery Cutoff Threshold [mv]
 - Network Registration Timeout [sec]
 - Device sleeps while magnet is within close proximity (Storage Mode)
 - User simply removes the magnet and the device becomes active.
 - Device weight starts at 3 grams (external wire antenna) or 3.8g (internal antenna)
 - Rechargeable LiPo Battery (3.7V) 50 - 75 mAh
 - Approximately 500 Cell-Locate connections on a single charge
 - 34 mW solar cell
 - Can fully charge battery in ~4 hours
 - Global LTE coverage
-

Interacting with your Flicker CL

Interaction with your transmitter is done via the companion app. To download the app follow the links below:

- Google Play Store
- Apple App Store

From the app you can:

- View all connection data.
- View and graph various parameters of the unit including battery voltage, connection time, and more.
- Make configuration changes and upload to be taken by transmitter at next connection.

Final Thoughts

This User Guide is a living document. Your experiences and input are greatly appreciated so please don't hesitate to reach out to us regarding what you'd like to see included here. You can submit your suggestions and any errors to our **Customer Service Desk** here and we will work to incorporate them in future revisions. All material © Cellular Tracking Technologies, 2022.



Figure 2: *Cell Locate deployed on an American Robin*