

TVS Diode

Transient Voltage Suppressor Diodes

ESD207-B1-02 Series

Ultra Low Clamping Bi-directional ESD / Transient / Surge Protection Diodes

ESD207-B1-02ELS ESD207-B1-02EL

Data Sheet

Revision 1.3, 2013-12-19 Final



Revision History: Revision 1.2, 2013-11-15						
Page or Item	Subjects (major changes since previous revision)					
Revision 1.3, 2	2013-12-19					
5	Table 2-2) updated					

Trademarks of Infineon Technologies AG

AURIX™, BlueMoon™, C166™, CanPAK™, CIPOS™, CIPURSE™, COMNEON™, EconoPACK™, CoolMOS™, CoolSET™, CORECONTROL™, CROSSAVE™, DAVE™, EasyPIM™, EconoBRIDGE™, EconoDUAL™, EconoPIM™, EiceDRIVER™, eupec™, FCOS™, HITFET™, HybridPACK™, I²RF™, ISOFACE™, IsoPACK™, MIPAQ™, ModSTACK™, my-d™, NovalithIC™, OmniTune™, OptiMOS™, ORIGA™, PRIMARION™, PrimePACK™, PrimeSTACK™, PRO-SIL™, PROFET™, RASIC™, ReverSave™, SatRIC™, SIEGET™, SINDRION™, SIPMOS™, SMARTi™, SmartLEWIS™, SOLID FLASH™, TEMPFET™, thinQ!™, TRENCHSTOP™, TriCore™, X-GOLD™, X-PMU™, XMM™, XPOSYS™.

Other Trademarks

Advance Design System™ (ADS) of Agilent Technologies, AMBA™, ARM™, MULTI-ICE™, KEIL™, PRIMECELL™, REALVIEW™, THUMB™, µVision™ of ARM Limited, UK. AUTOSAR™ is licensed by AUTOSAR development partnership. Bluetooth™ of Bluetooth SIG Inc. CAT-iq™ of DECT Forum. COLOSSUS™, FirstGPS™ of Trimble Navigation Ltd. EMV™ of EMVCo, LLC (Visa Holdings Inc.). EPCOS™ of Epcos AG. FLEXGO™ of Microsoft Corporation. FlexRay™ is licensed by FlexRay Consortium. HYPERTERMINAL™ of Hilgraeve Incorporated. IEC™ of Commission Electrotechnique Internationale. IrDA™ of Infrared Data Association Corporation. ISO™ of INTERNATIONAL ORGANIZATION FOR STANDARDIZATION. MATLAB™ of MathWorks, Inc. MAXIM™ of Maxim Integrated Products, Inc. MICROTEC™, NUCLEUS™ of Mentor Graphics Corporation. Mifare™ of NXP. MIPI™ of MIPI Alliance, Inc. MIPS™ of MIPS Technologies, Inc., USA. muRata™ of MURATA MANUFACTURING CO., MICROWAVE OFFICE™ (MWO) of Applied Wave Research Inc., OmniVision™ of OmniVision Technologies, Inc. Openwave™ Openwave Systems Inc. RED HAT™ Red Hat, Inc. RFMD™ RF Micro Devices, Inc. SIRIUS™ of Sirius Satellite Radio Inc. SOLARIS™ of Sun Microsystems, Inc. SPANSION™ of Spansion LLC Ltd. Symbian™ of Symbian Software Limited. TAIYO YUDEN™ of Taiyo Yuden Co. TEAKLITE™ of CEVA, Inc. TEKTRONIX™ of Tektronix Inc. TOKO™ of TOKO KABUSHIKI KAISHA TA. UNIX™ of X/Open Company Limited. VERILOG™, PALLADIUM™ of Cadence Design Systems, Inc. VLYNQ™ of Texas Instruments Incorporated. VXWORKS™, WIND RIVER™ of WIND RIVER SYSTEMS, INC. ZETEX™ of Diodes Zetex Limited.

Last Trademarks Update 2010-10-26

FinalData Sheet 2 Revision 1.3, 2013-12-19



Ultra Low Clamping Bi-directional ESD / Transient / Surge Protection Diodes

1 Ultra Low Clamping Bi-directional ESD / Transient / Surge Protection Diodes

1.1 Features

- ESD / transient / surge protection of one data / $V_{
 m bus}$ line exceding standard:
 - IEC61000-4-2 (ESD): ±30 kV (air / contact discharge)
 - IEC61000-4-4 (EFT): ±50 A (5/50 ns)
 - IEC61000-4-5 (surge): ±8 A (8/20 μs)
- Bi-directional, symmetrical working voltage up to $V_{
 m RWM}$ = ±3.3 V
- Medium capacitance: $C_L = 14 \text{ pF} \text{ (typ.)}$
- Ultra low clamping voltage $V_{\rm CL}$ = 7 V (typ.) @ $I_{\rm PP}$ = 16 A (TLP)
- Ultra low dynamic resistance $R_{\text{DYN}} = 0.13 \Omega \text{ typ.}$
- · Pb-free (RoHS compliant) and halogen free package





1.2 Application Examples

- Audio Line, Speaker, Headset, Microphone Protection
- Human Interface Devices (Keyboard, Touchpad, Buttons)

1.3 Product Description

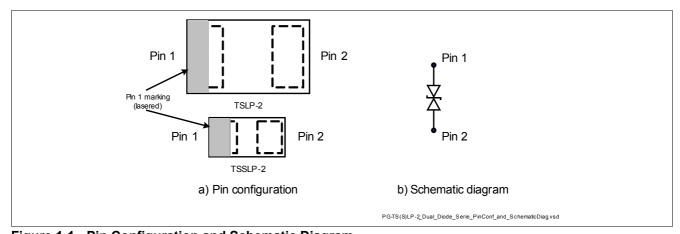


Figure 1-1 Pin Configuration and Schematic Diagram

Table 1-1 Ordering Information

Туре	Package	Configuration	Marking code
ESD207-B1-02ELS	TSSLP-2-3	1 line, bi-directional	<u>Y</u>
ESD207-B1-02EL	TSLP-2-19	1 line, bi-directional	A



2 Characteristics

Table 2-1 Maximum Ratings at $T_A = 25$ °C, unless otherwise specified¹⁾

Symbol		S	Unit	
	Min.	Тур.	Max.	
V_{ESD}	_	_	30	kV
I_{PP}	_	_	8	Α
P_{PK}	_	_	65	W
T_{OP}	-40	_	125	°C
$T_{ m stg}$	-65	_	150	°C
	V_{ESD} I_{PP} P_{PK} T_{OP}	$\begin{array}{c c} \textbf{Min.} \\ V_{\text{ESD}} & - \\ I_{\text{PP}} & - \\ P_{\text{PK}} & - \\ T_{\text{OP}} & -40 \\ \end{array}$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	Min. Typ. Max. V_{ESD} - - 30 I_{PP} - - 8 P_{PK} - - 65 T_{OP} -40 - 125 T_{OP} - - 150

- 1) Device is electrically symmetrical
- 2) $V_{\rm ESD}$ according to IEC61000-4-2
- 3) $I_{\rm PP}$ according to IEC61000-4-5

Attention: Stresses above the max. values listed here may cause permanent damage to the device.

Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Maximum ratings are absolute ratings; exceeding only one of these values may cause irreversible damage to the integrated circuit.

2.1 Electrical Characteristics at $T_A = 25$ °C, unless otherwise specified

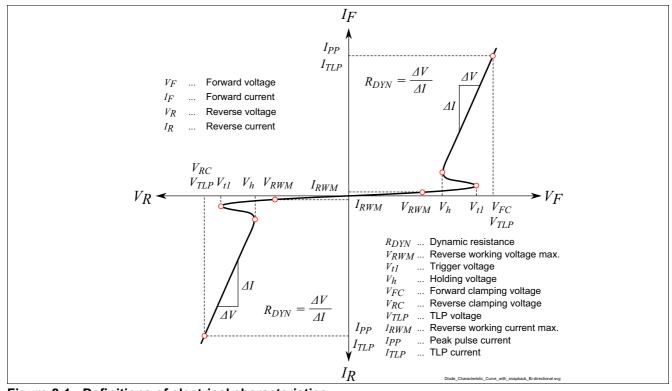


Figure 2-1 Definitions of electrical characteristics



Table 2-2 DC Characteristics at T_A = 25 °C, unless otherwise specified¹⁾

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Тур.	Max.		
Reverse working voltage	V_{RWM}	-	_	3.3	V	
Reverse current	I_{R}	_	_	50	nA	V _R = 3.3 V
Trigger voltage	V_{t1}	3.65	_	_	V	
Holding voltage	V_h	3.65	4.4	_	V	I _R = 10 mA

¹⁾ Device is electrically symmetrical

Table 2-3 AC Characteristics at T_A = 25 °C, unless otherwise specified

Parameter	Symbol	Values		Unit	Note / Test Condition	
		Min.	Тур.	Max.		
Line capacitance	C_{L}	_	14	20	pF	$V_{\rm R}$ = 0 V, f = 1 MHz

Table 2-4 ESD and Surge Characteristics at T_A = 25 °C, unless otherwise specified

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Тур.	Max.		
Clamping voltage ¹⁾ Pin 1 to GND	V_{CL}	_	7	_	V	I _{TLP} = 16 A
		_	9	_		I _{TLP} = 30 A
Clamping voltage ¹⁾ GND to Pin 1		_	7.5	_		I _{TLP} = 16 A
		_	9	_		I _{TLP} = 30 A
Clamping voltage ²⁾		_	4.5	5.8		I _{PP} = 1 A
		_	6.8	8.1		I _{PP} = 8 A
Dynamic resistance ¹⁾	R_{DYN}	_	0.13	_	Ω	

¹⁾ ANSI/ESD STM5.5.1 - Electrostatic Discharge Sensitive Testing using Transmission Line Pulse (TLP) Model. TLP conditions: Z_0 = 50 Ω , $t_{\rm p}$ = 100 ns, $t_{\rm r}$ = 0.6 ns, $I_{\rm TLP}$ and $V_{\rm TLP}$ averaging window: $t_{\rm 1}$ = 30 ns to $t_{\rm 2}$ = 60 ns, extraction of dynamic resistance using least squares fit of TLP characteristic between $I_{\rm TLP1}$ = 5 A and $I_{\rm TLP2}$ = 40 A. Please refer to Application Note AN210 [1]

²⁾ $I_{\rm PP}$ according to IEC61000-4-5 ($t_{\rm p}$ = 8/20 μ s)



2.2 Typical Characteristics at T_A = 25 °C, unless otherwise specified

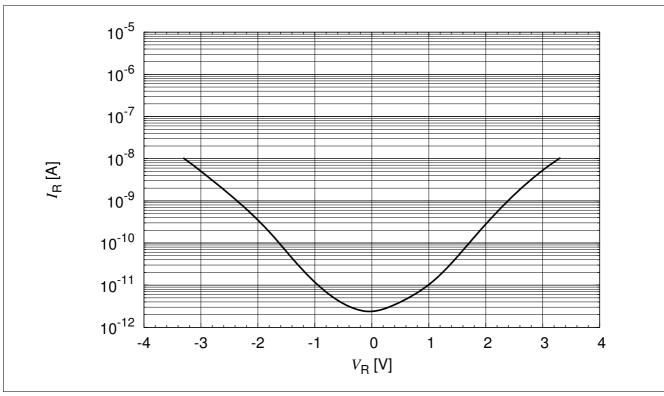


Figure 2-2 Reverse current: $I_R = f(V_R)$

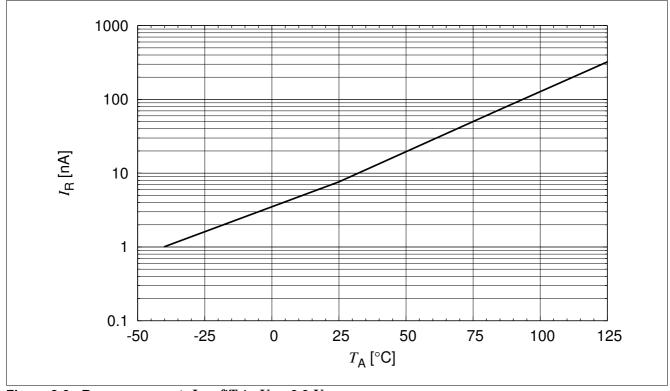


Figure 2-3 Reverse current: $I_{\rm R}$ = $f(T_{\rm A})$, $V_{\rm R}$ = 3.3 V



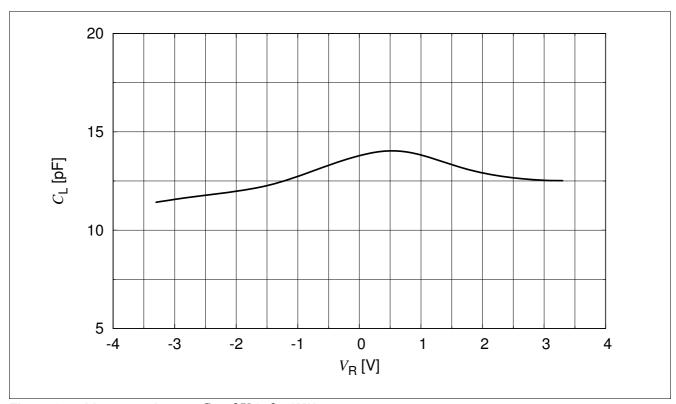


Figure 2-4 Line capacitance: $C_L = f(V_R), f = 1 \text{MHz}$



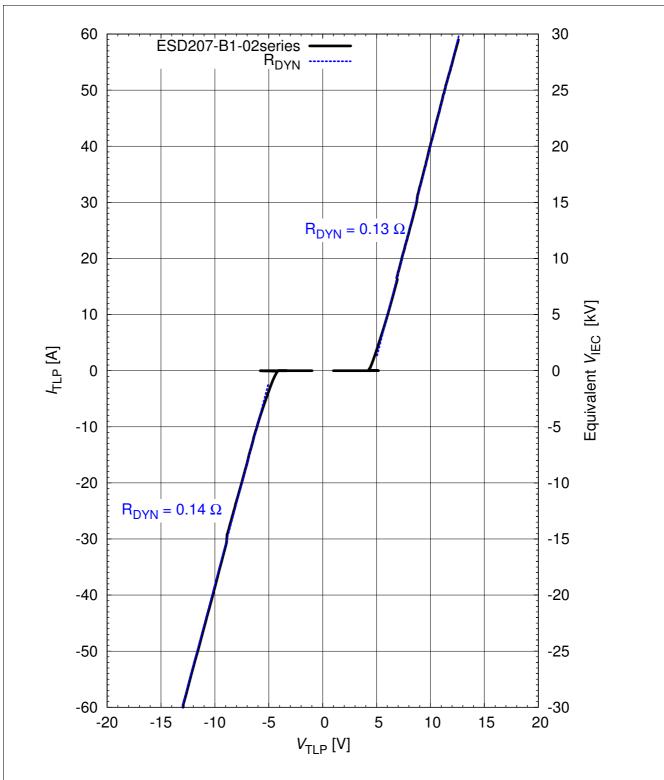


Figure 2-5 Clamping voltage (TLP): $I_{\mathsf{TLP}} = f(V_{\mathsf{TLP}})$ according ANSI/ESD STM5.5.1 - Electrostatic Discharge Sensitivity Testing using Transmission Line Pulse (TLP) Model. TLP conditions: $Z_0 = 50~\Omega$, $t_{\mathsf{p}} = 100~\mathrm{ns}, t_{\mathsf{r}} = 0.6~\mathrm{ns}, I_{\mathsf{TLP}}$ and V_{TLP} averaging window: $t_1 = \mathrm{ns}$ to $t_2 = 60~\mathrm{ns}$, extraction of dynamic resistance using squares fit to TLP characteristics between $I_{\mathsf{TLP1}} = 5~\mathrm{A}$ and $I_{\mathsf{TLP2}} = 40~\mathrm{A}$. Please refer to Application Note AN210 [1]



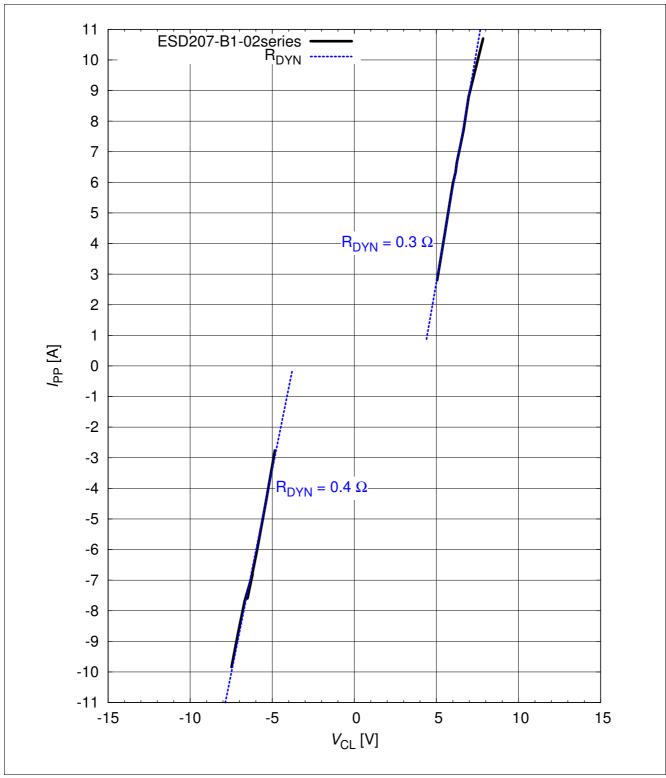


Figure 2-6 Pulse current (IEC61000-4-5) versus clamping voltage: $I_{PP} = f(V_{CL})$



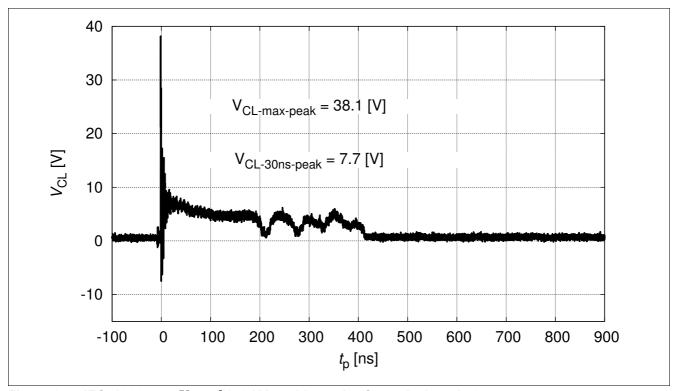


Figure 2-7 IEC61000-4-2 : $V_{CL} = f(t)$, 8 kV positive pulse from pin 1 to pin 2

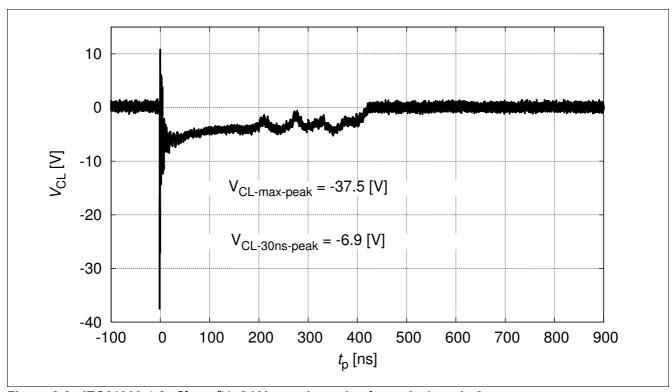


Figure 2-8 IEC61000-4-2 : $V_{CL} = f(t)$, 8 kV negative pulse from pin 1 to pin 2



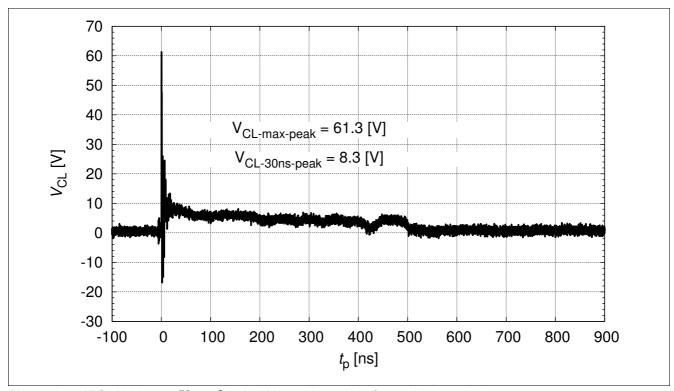


Figure 2-9 IEC61000-4-2 : $V_{CL} = f(t)$, 15 kV positive pulse from pin 1 to pin 2

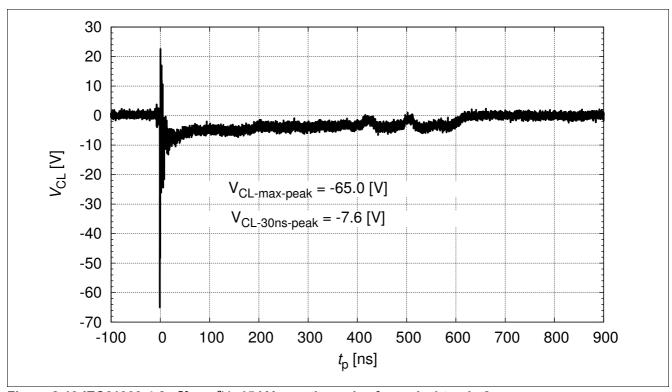


Figure 2-10 IEC61000-4-2 : $V_{CL} = f(t)$, 15 kV negative pulse from pin 1 to pin 2



Application Information

3 Application Information

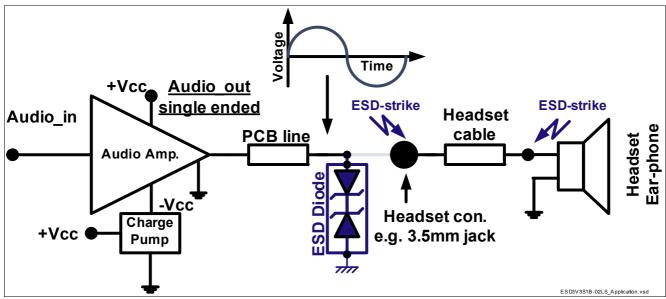


Figure 3-1 Single line, bi-directional ESD / Transient protection



Package Information

4 Package Information

4.1 TSSLP-2-3

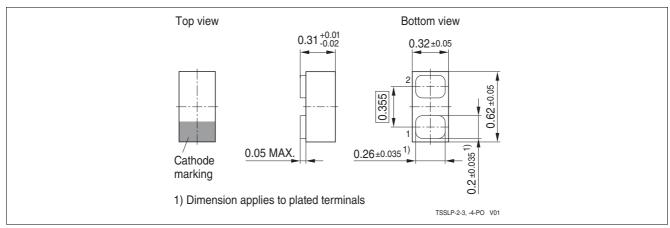


Figure 4-1 TSSLP-2-3: Package overview (dimension in mm)

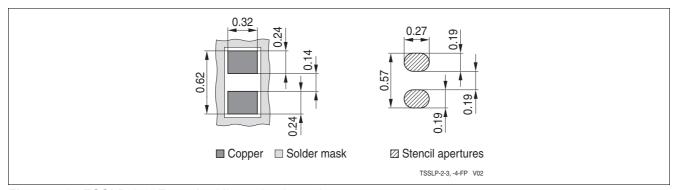


Figure 4-2 TSSLP-2-3: Footprint (dimension in mm)

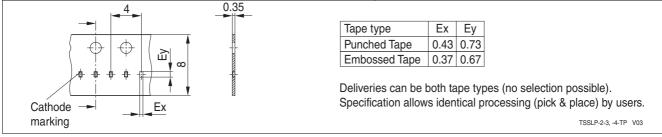


Figure 4-3 TSSLP-2-3: Tape information (dimension in mm)

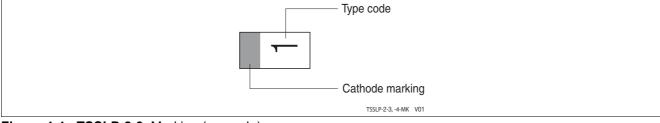


Figure 4-4 TSSLP-2-3: Marking (example)



Package Information

4.2 TSLP-2-19

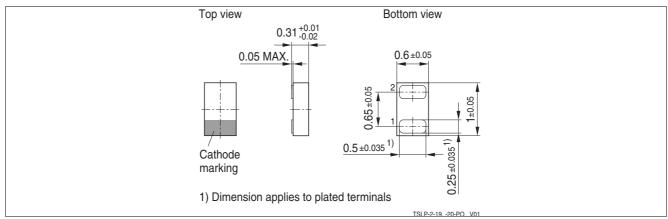


Figure 4-5 TSLP-2-19: Package outline(dimension in mm), proposal

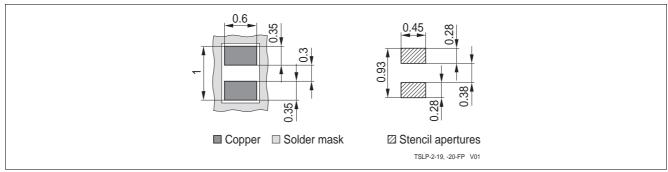


Figure 4-6 TSLP-2-19: Footprint (dimension in mm), proposal

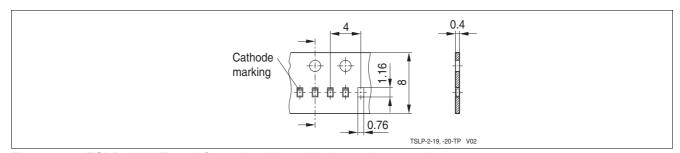


Figure 4-7 TSLP-2-19: Tape information (dimension in mm), proposal

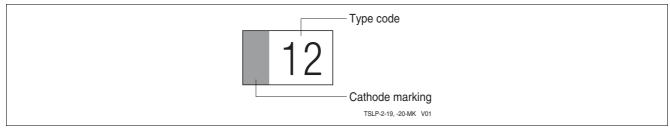


Figure 4-8 TSLP-2-19: Marking (example)



References

References

- [1] Infineon AG **Application Note AN210:** Effective ESD Protection design at System Level Using VF-TLP Characterization Methodology
- [2] Infineon AG Recommendations for PCB Assembly of Infineon TSLP and TSSLP Packages

www.infineon.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Infineon:

ESD207B102ELE6327XTMA1 ESD207-B1-02EL E6327