



# User Manual for the Pegging Schedule


1. Sign In by entering correct username and password.

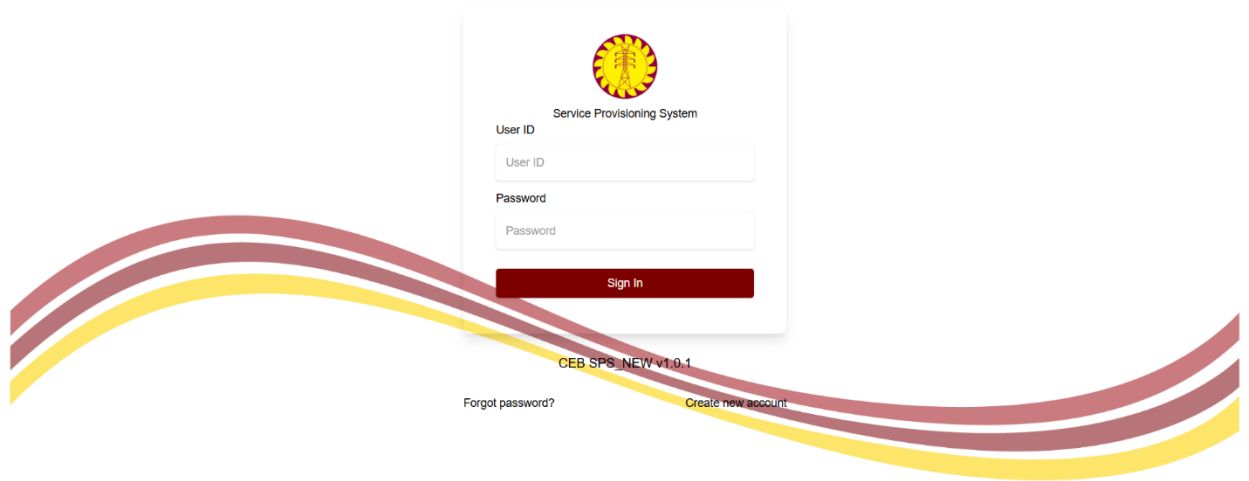

2. After successfully signed in, navigate to the admin dashboard.
3. Select Active Appointments from sidebar or stat card in the dashboard.

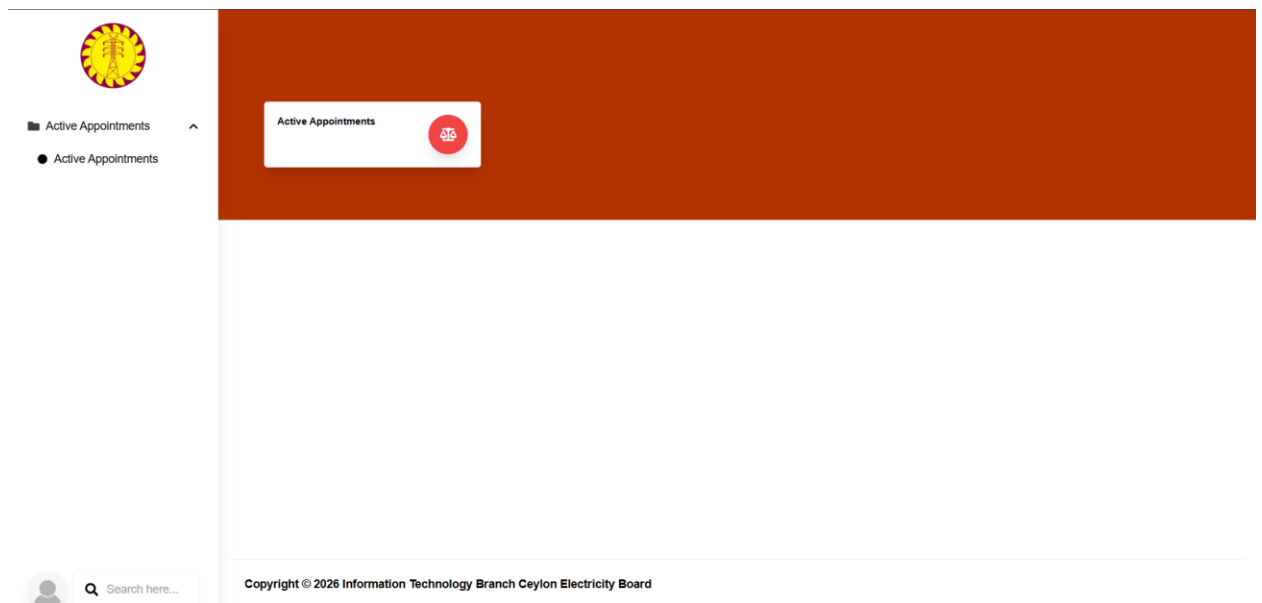

- Then user can select an appointment by click on work estimation number.

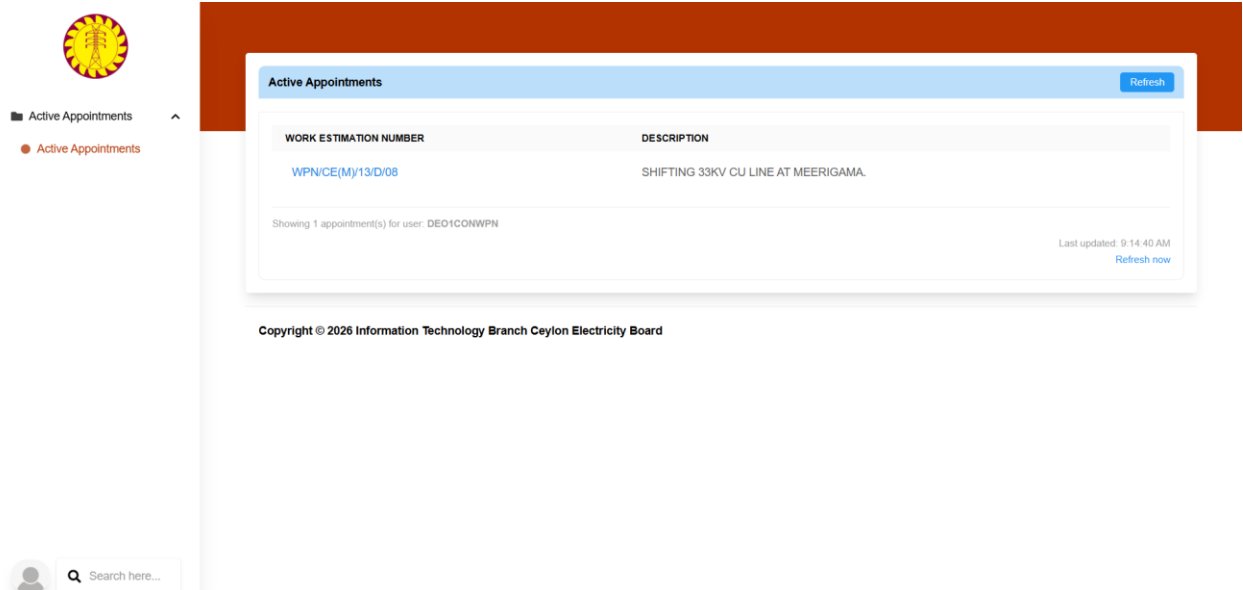


The screenshot shows a web application interface for 'Active Appointments'. On the left is a sidebar with a yellow circular logo and a menu item 'Active Appointments' with a red dot. The main content area has a blue header 'Active Appointments' with a 'Refresh' button. Below is a table with two columns: 'WORK ESTIMATION NUMBER' and 'DESCRIPTION'. The table contains one row with the value 'WPN/CE(M)/13/D/08' and the description 'SHIFTING 33KV CU LINE AT MEERIGAMA.'. Below the table, it says 'Showing 1 appointment(s) for user: DEO1CONWPN'. At the bottom right, it says 'Last updated: 9:14:40 AM' and 'Refresh now'. At the very bottom, there is a copyright notice: 'Copyright © 2026 Information Technology Branch Ceylon Electricity Board'.

WORK ESTIMATION NUMBER	DESCRIPTION
WPN/CE(M)/13/D/08	SHIFTING 33KV CU LINE AT MEERIGAMA.

Showing 1 appointment(s) for user: DEO1CONWPN

Last updated: 9:14:40 AM  
[Refresh now](#)

Copyright © 2026 Information Technology Branch Ceylon Electricity Board

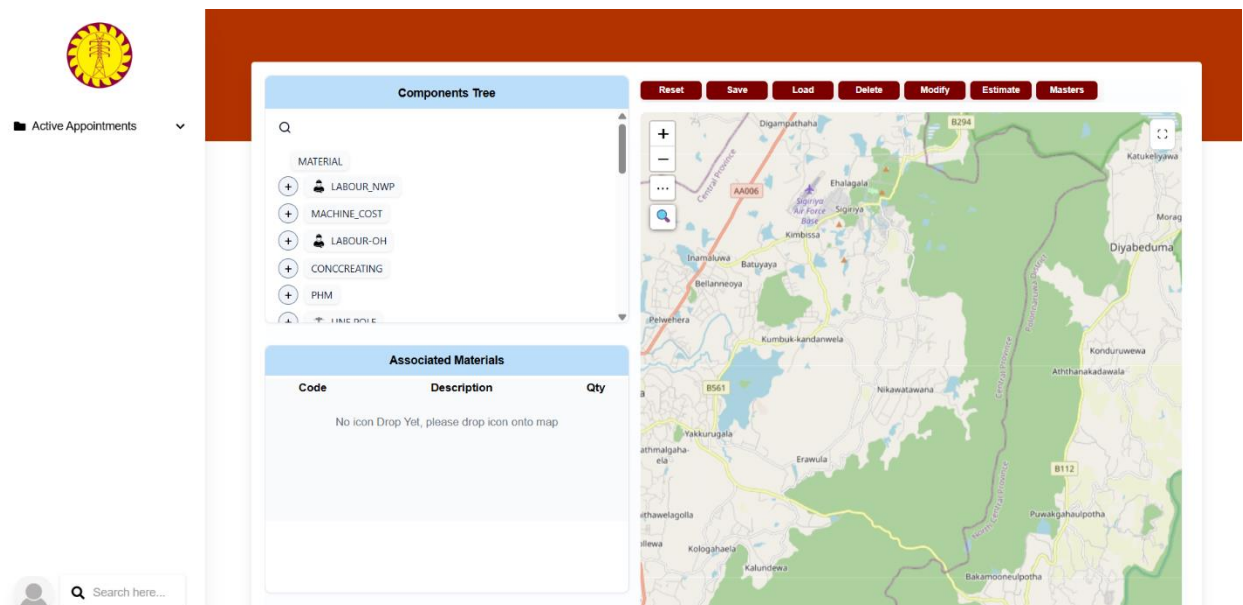


The screenshot shows a web application interface for 'Components Tree' and 'Associated Materials'. On the left is a sidebar with a yellow circular logo and a menu item 'Active Appointments' with a red dot. The main content area has a blue header 'Components Tree' with a 'Reset' button. Below is a search bar and a list of materials: 'LABOUR\_NWP', 'MACHINE\_COST', 'LABOUR-OH', 'CONCREATING', 'PHM', and 'LINE POLE'. Below this is a table with the header 'Associated Materials' and columns 'Code', 'Description', and 'Qty'. The table contains one row with the text 'No icon Drop Yet, please drop icon onto map'. At the bottom right, there is a map area with a search icon and a 'Masters' button.


Code	Description	Qty
	No icon Drop Yet, please drop icon onto map	

- You can search locations by using search icon in map area.


6. From + icon can – icon can used to zoom in and zoom out the map, to make search locations exactly.

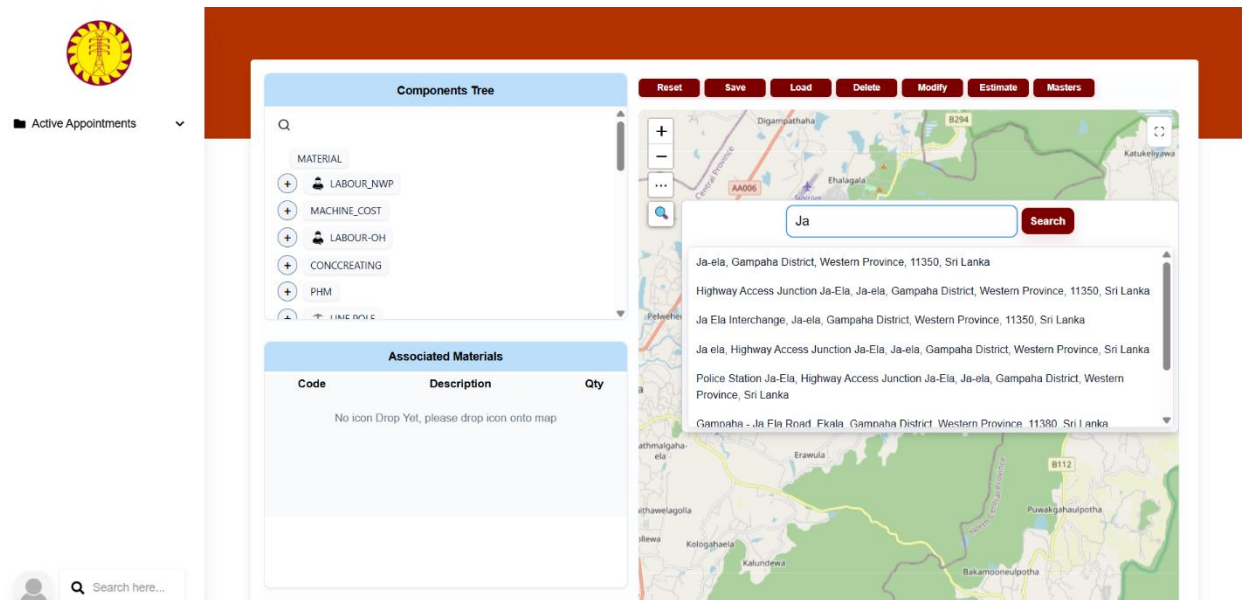


7. Icon in right side of the map can be used to enlarge the map. And three dots gives map in layers.

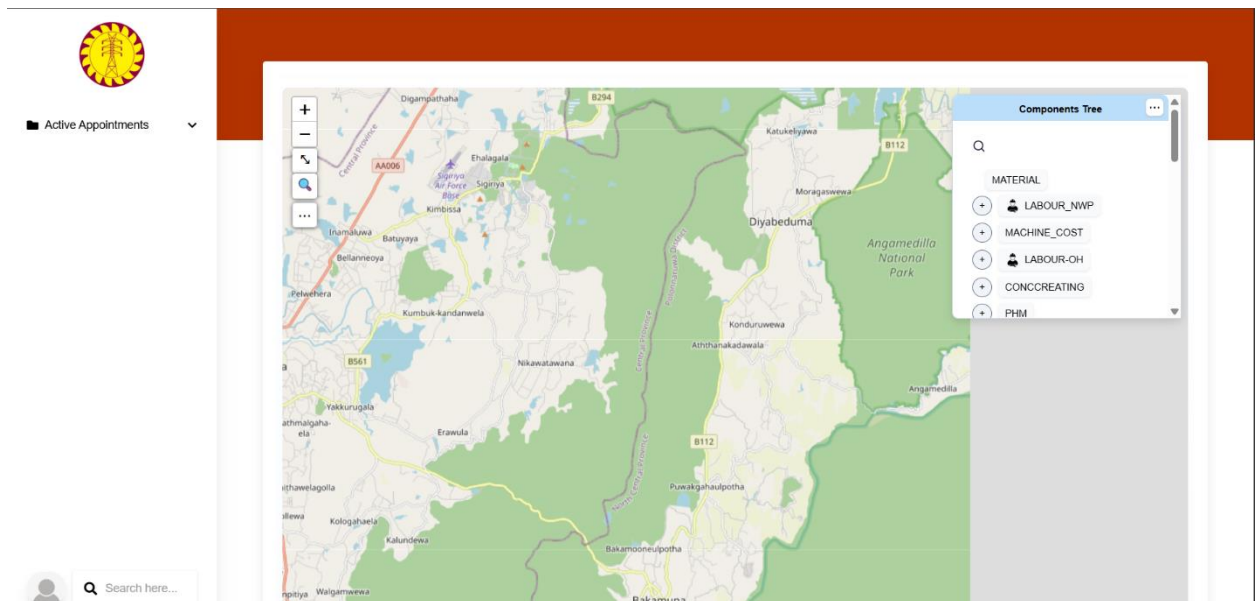

8. From Components tree, you can select relevant components and drag and drop those components to the relevant locations in the map.
9. From Associated Materials, you can see selected components and quantities.
10. When you click on dropped components in map, you can see icons to rotate and change the size of the components in the map.
11. And you can use delete components from the map by delete button.
12. Reset button can use to reset the map.

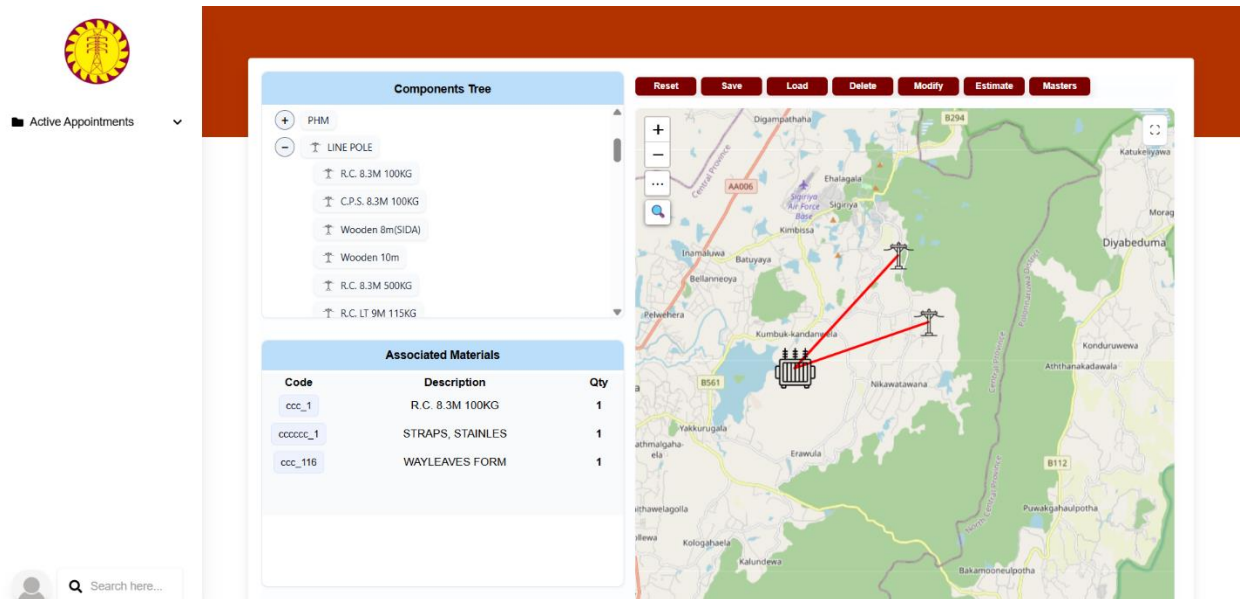

13. Estimate button gives you estimated cost for this placement. Then you can save this estimation to the database by Save to DB button.

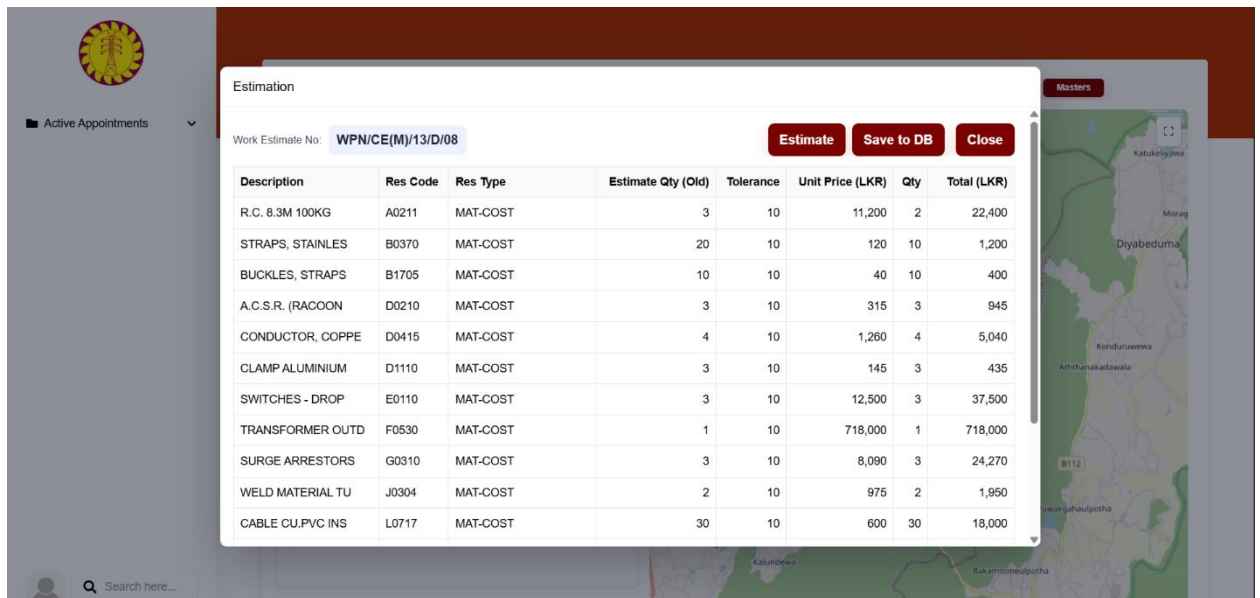


Estimation

Work Estimate No: WPN/CE(M)/13/D/08

Description	Res Code	Res Type	Estimate Qty (Old)	Tolerance	Unit Price (LKR)	Qty	Total (LKR)
R.C. 8.3M 100KG	A0211	MAT-COST	3	10	11,200	2	22,400
STRAPS, STAINLES	B0370	MAT-COST	20	10	120	10	1,200
BUCKLES, STRAPS	B1705	MAT-COST	10	10	40	10	400
A.C.S.R. (RACON)	D0210	MAT-COST	3	10	315	3	945
CONDUCTOR, COPPE	D0415	MAT-COST	4	10	1,260	4	5,040
CLAMP ALUMINIUM	D1110	MAT-COST	3	10	145	3	435
SWITCHES - DROP	E0110	MAT-COST	3	10	12,500	3	37,500
TRANSFORMER OUTD	F0530	MAT-COST	1	10	718,000	1	718,000
SURGE ARRESTORS	G0310	MAT-COST	3	10	8,090	3	24,270
WELD MATERIAL TU	J0304	MAT-COST	2	10	975	2	1,950
CABLE CU.PVC INS	L0717	MAT-COST	30	10	600	30	18,000

Buttons: Estimate, Save to DB, Close

14. Modify button can use to modify the estimation by changing the components and save.

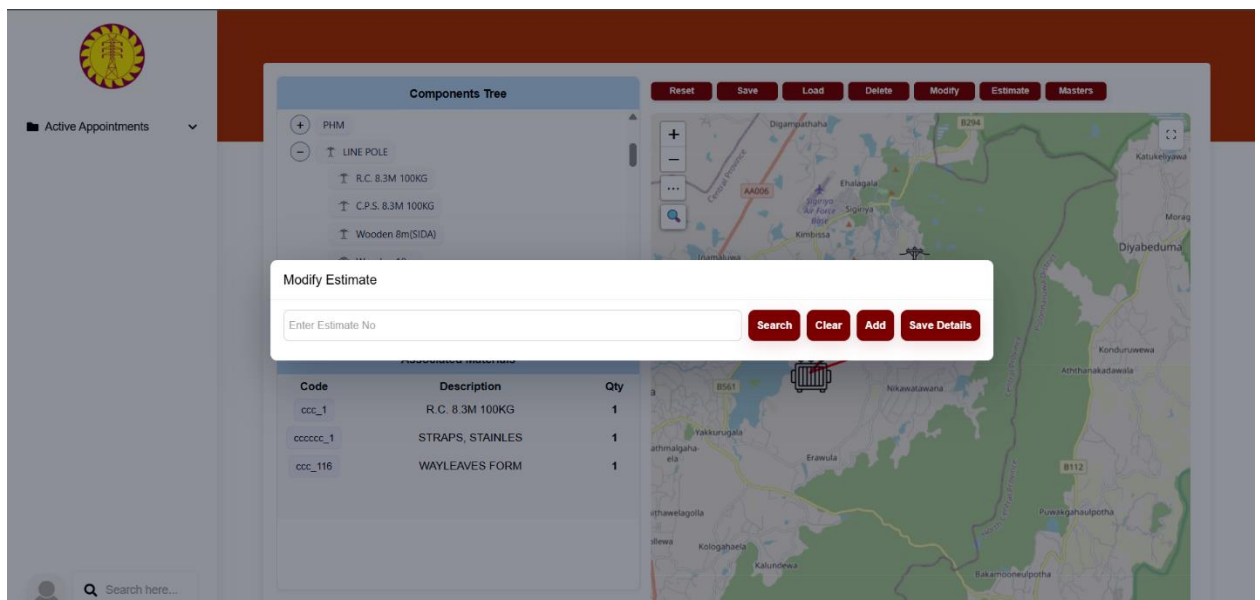

Components Tree

- PHM
- LINE POLE
  - R.C. 8.3M 100KG
  - C.P.S. 8.3M 100KG
  - Wooden 8m(SIDA)

Modify Estimate


Enter Estimate No

Buttons: Search, Clear, Add, Save Details

Code	Description	Qty
ccc_1	R.C. 8.3M 100KG	1
cccccc_1	STRAPS, STAINLES	1
ccc_116	WAYLEAVES FORM	1

Buttons: Reset, Save, Load, Delete, Modify, Estimate, Masters

15. Masters button gives details of materials used to create selected components.

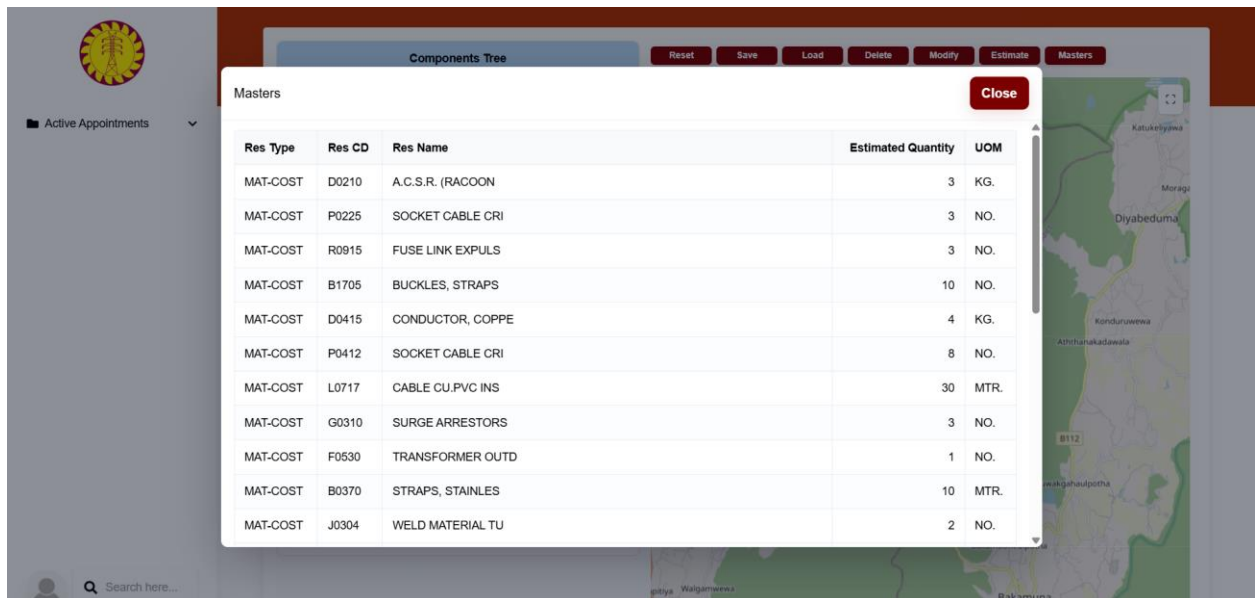

The screenshot shows a software interface with a sidebar on the left containing a logo and 'Active Appointments'. A 'Components Tree' is visible at the top. A 'Masters' dialog box is open, displaying a table of materials. The table has five columns: Res Type, Res CD, Res Name, Estimated Quantity, and UOM. The background shows a map of a region with various locations labeled.

Res Type	Res CD	Res Name	Estimated Quantity	UOM
MAT-COST	D0210	A.C.S.R. (RACON	3	KG.
MAT-COST	P0225	SOCKET CABLE CRI	3	NO.
MAT-COST	R0915	FUSE LINK EXPULS	3	NO.
MAT-COST	B1705	BUCKLES, STRAPS	10	NO.
MAT-COST	D0415	CONDUCTOR, COPPE	4	KG.
MAT-COST	P0412	SOCKET CABLE CRI	8	NO.
MAT-COST	L0717	CABLE CU.PVC INS	30	MTR.
MAT-COST	G0310	SURGE ARRESTORS	3	NO.
MAT-COST	F0530	TRANSFORMER OUTD	1	NO.
MAT-COST	B0370	STRAPS, STAINLES	10	MTR.
MAT-COST	J0304	WELD MATERIAL TU	2	NO.

16. Save button can be used to save the placement as .png, .json, .pdf file.

17. Load button can be used to load, saved files if they are .json files.