


HEADBOARD — SHOP DRAWINGS · OVERALL ENVELOPE

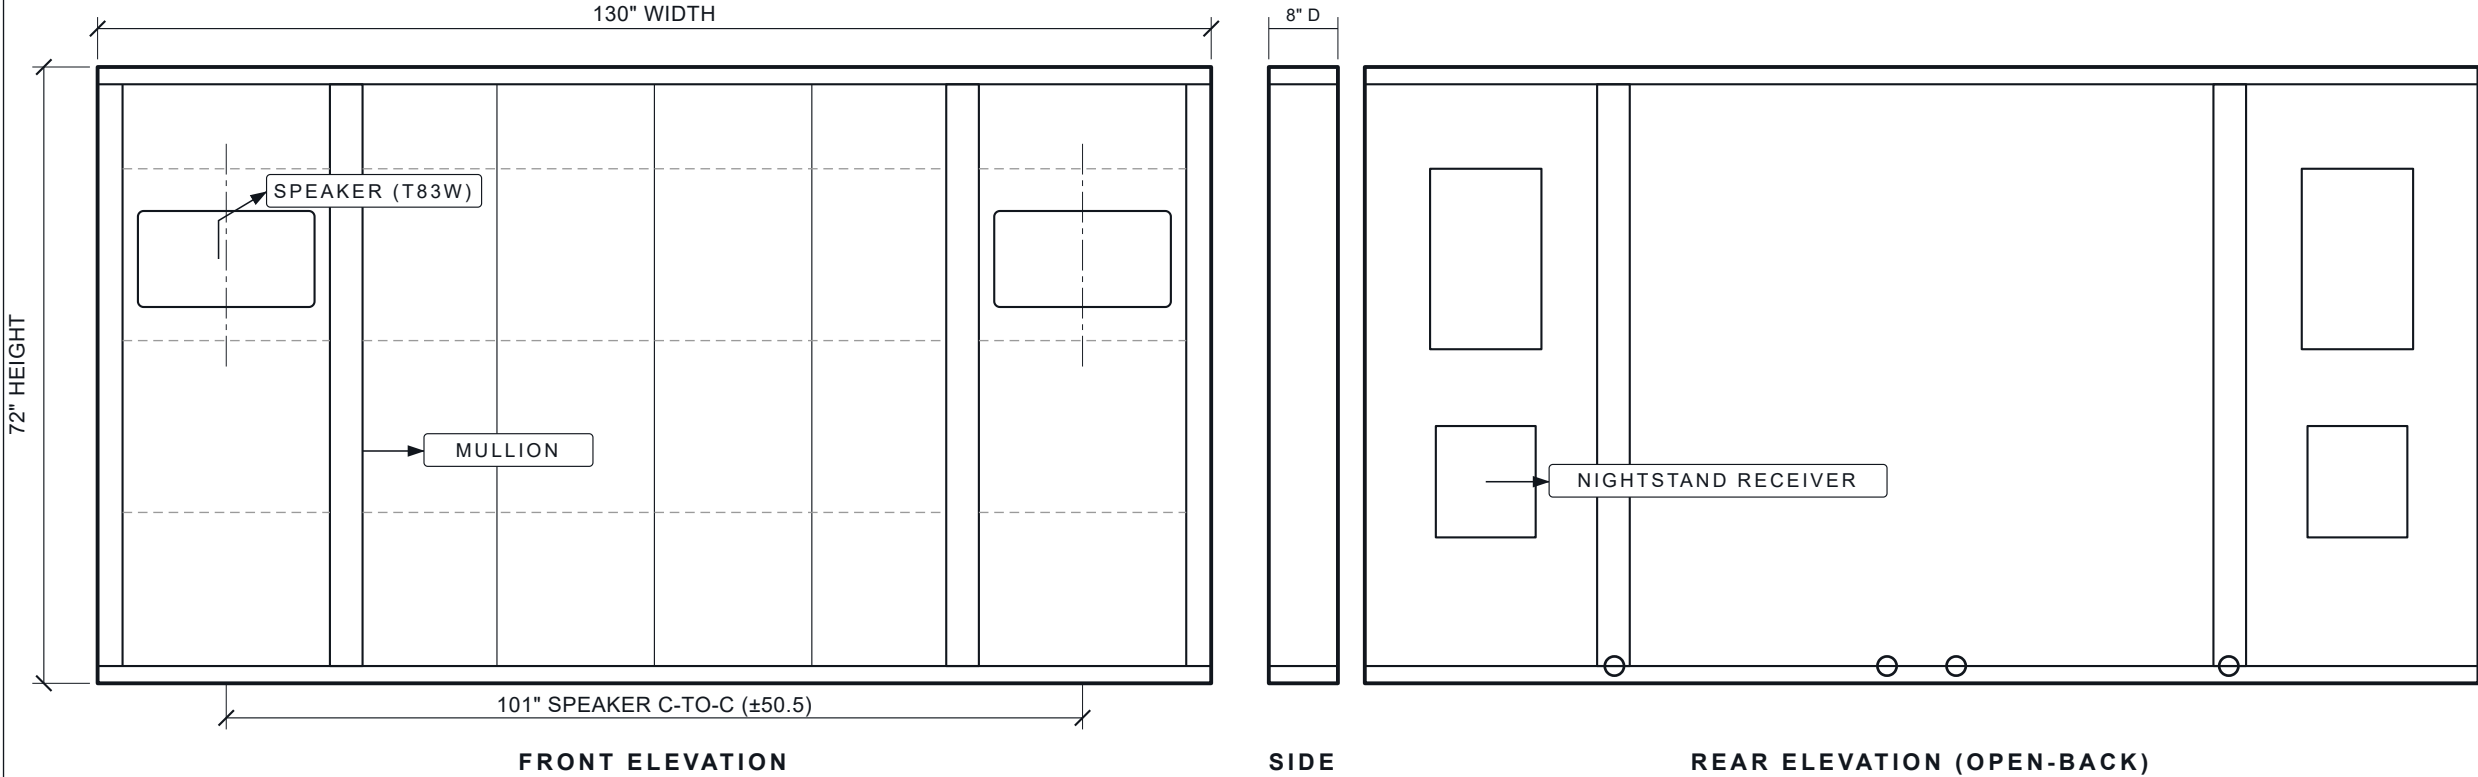

SHEETS IN THIS SET

- 1 OVERALL ENVELOPE (this sheet)
- 2 PART DRAWINGS + CUT LIST
- 3 SECTION DETAILS
- 4 CRITICAL INTERFACES
- 5 HARDWARE SCHEDULE

GENERAL NOTES

- All dimensions in inches ("). AFF = above finished floor. Figured dimensions govern — DO NOT scale.
- Headboard overall 130 W × 72 H × 8 D. Open-back rail-and-stile frame; twelve 1" front skins in 4 horizontal courses.
- Mullions at ±36; bolts to the base at ±36 + ±4. Receivers / USB-C at ±51; speakers bay-centered at ±50.5.
- Joinery method + grain at builder's discretion. Parts (sheet 2) NOT to a single scale — the cut list governs.
- Speakers mount horizontal (owner D-080): AMT/mid pod inboard (toward bed center), 8" woofer outboard, mirror-imaged L/R. Cutout in a solid course (sheet 2).


GRAPHIC SCALE (FEET) · ELEVATIONS s = 4.46 px/in




|                                      |                                         |
|--------------------------------------|-----------------------------------------|
| PROJECT<br>HEIRLOOM BED              |                                         |
| DRAWING<br>Headboard — Shop Drawings | DRAWING NO.<br>Headboard-Shop_Blueprint |
| REV<br>2.5                           | SHEET<br>1 OF 5                         |

PART DRAWINGS & CUT LIST


1 TOP CAP  
2" THK · ×1

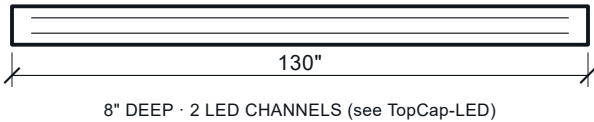


2 BOTTOM RAIL  
2" THK · ×1

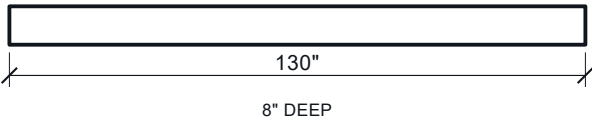


3 SIDE STILE  
2" W · ×2

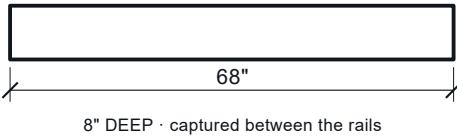


4 MULLION  
4" W · ×2 (at ±36)

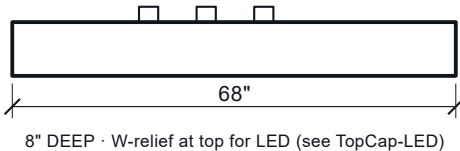

5 SKIN — OUTER  
1" THK · ×8



6 SKIN — CENTER  
1" THK · ×4

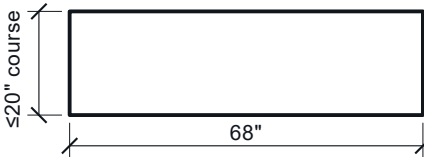

**FRONT SKINS — HORIZONTAL COURSES** Front field = horizontal courses, each ≤20" tall (board-width / warp limit), grain horizontal; seams AFF 20/40/60 → courses 18/20/20/10"; skins kept whole per bay (no vertical breakup).  
Speaker cutout (AFF 44–55) sits inside the 40–60 course — NO seam crosses the hole. Rear support = housed cross-rails at AFF 20/40/60. [TBD-CONFIRM Lee: continuous 68" center run warp-safe length.]

CUT LIST

| # | PART                | QTY | THK   | WIDTH | LENGTH | NOTES                                                                                              |
|---|---------------------|-----|-------|-------|--------|----------------------------------------------------------------------------------------------------|
| 1 | Top cap             | 1   | 2"    | 8"    | 130"   | LED channels routed — see TopCap-LED                                                               |
| 2 | Bottom rail         | 1   | 2"    | 8"    | 130"   | full-width bottom frame member                                                                     |
| 3 | Side stile          | 2   | 2"    | 8"    | 68"    | captured between the rails (mirror pair)                                                           |
| 4 | Mullion             | 2   | 4"    | 8"    | 68"    | at x = ±36; W-relief at top for the LED channels                                                   |
| 5 | Front skin — outer  | 8   | 1"    | 25"   | ≤20"   | 4 courses/side: 18/20/20/10" tall, grain horiz.; the 20" (40–60) course carries the speaker cutout |
| 6 | Front skin — center | 4   | 1"    | 68"   | ≤20"   | per course (18/20/20/10" tall); grain horiz.                                                       |
| 7 | Course cross-rail   | 9   | 1.25" | 7"    | 25/68" | behind seams AFF 20/40/60 — rear support                                                           |

PROJECT  
HEIRLOOM BED

DRAWING  
Headboard — Shop Drawings


DRAWING NO.  
Headboard-Shop\_Blueprint

REV  
2.5

SHEET  
2 OF 5


SECTION DETAILS

SECTION A-A

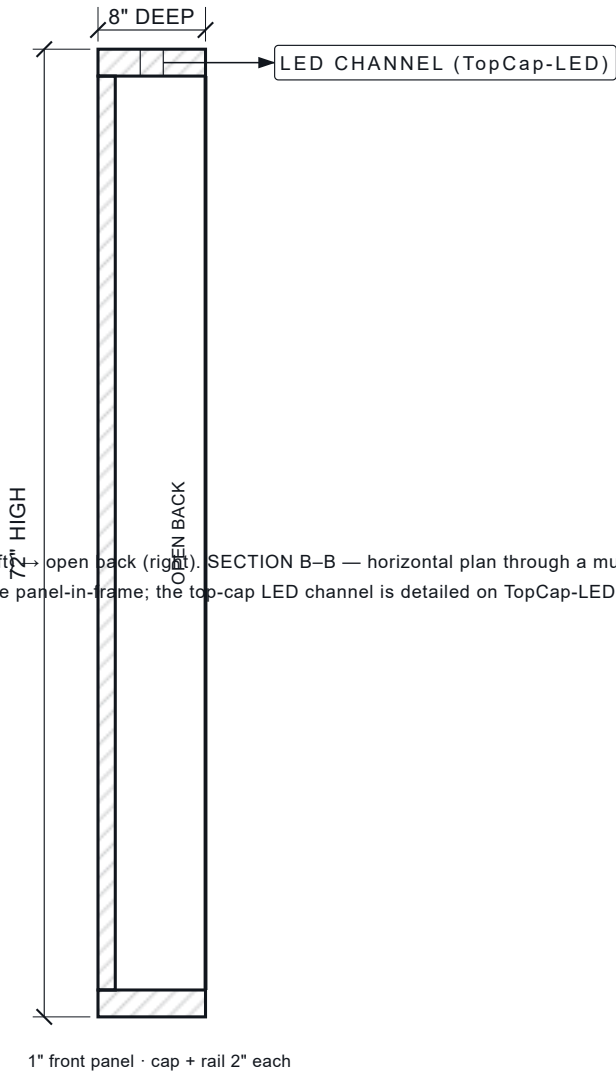

SECTION B-B


PLAN THROUGH A MULLION · OPEN BACK AT TOP

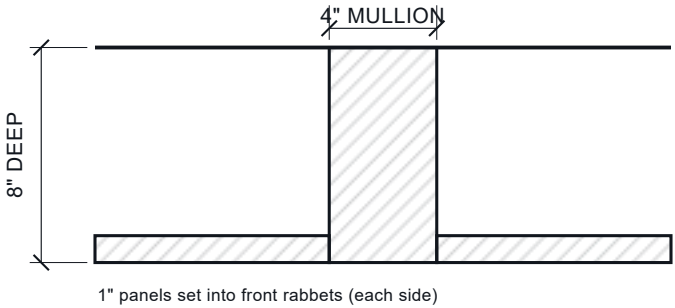

SECTION A-A — vertical, front (left) → open back (right). SECTION B-B — horizontal plan through a mullion.  
Sections show the depth build + the panel-in-frame; the top-cap LED channel is detailed on TopCap-LED. Joint method + grain at builder's discretion. Not to a single scale.

|                                      |                                         |  |
|--------------------------------------|-----------------------------------------|--|
| PROJECT<br>HEIRLOOM BED              |                                         |  |
| DRAWING<br>Headboard — Shop Drawings | DRAWING NO.<br>Headboard-Shop_Blueprint |  |
| REV<br>2.5                           | SHEET<br>3 OF 5                         |  |

HEADBOARD REAR (OPEN-BACK) · base bolts · nightstand receivers · speakers · USB-C

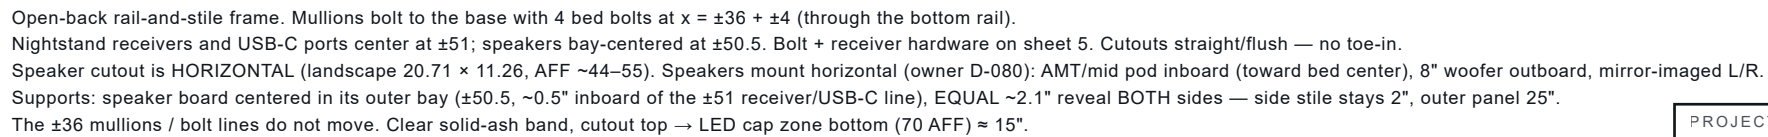


|                                             |                                                |
|---------------------------------------------|------------------------------------------------|
| PROJECT<br><b>HEIRLOOM BED</b>              |                                                |
| DRAWING<br><b>Headboard — Shop Drawings</b> | DRAWING NO.<br><b>Headboard-Shop_Blueprint</b> |
| REV<br><b>2.5</b>                           | SHEET<br><b>4 OF 5</b>                         |

HARDWARE SCHEDULE

| # | ITEM                     | QTY | SPECIFICATION                           | LOCATION / NOTE                                                                           |
|---|--------------------------|-----|-----------------------------------------|-------------------------------------------------------------------------------------------|
| 1 | Bed bolt                 | 4   | 3/8"-16 steel, hex head; length to suit | Bottom rail → base · x = ±36 + ±4                                                         |
| 2 | Cross-dowel (barrel nut) | 4   | 3/8"-16 steel                           | In the base; receives each bed bolt                                                       |
| 3 | Nightstand receiver bolt | 8   | Captive square-nut + machine bolt       | Nightstand → rear receiver (4 per side)                                                   |
| 4 | USB-C insert             | 4   | Owner-supplied 4-port, locking          | Headboard face · ±51 · ~30" AFF — builder cuts the opening                                |
| 5 | In-wall speaker          | 2   | Owner-supplied in-wall                  | Cutout ±50.5 · 20.71 × 11.26 (horizontal) — straight/flush, AMT-mid inboard; builder cuts |

DETAIL — BED-BOLT CONNECTION (HEADBOARD → BASE)

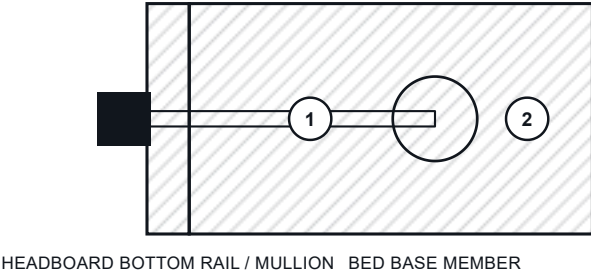

- 1

3/8" bed bolt — steel, hex head (×4 at ±36 / ±4)
- 2

Cross-dowel / barrel nut — set in the base (×4)

Case joinery + grain at builder's discretion. USB-C inserts + in-wall speakers are owner-installed — the builder provides the cutouts only.  
Bed-bolt + receiver positions locate on sheet 4 (Critical Interfaces). The top-cap LED hardware is on the TopCap-LED sheet.

|                                      |                                         |
|--------------------------------------|-----------------------------------------|
| PROJECT<br>HEIRLOOM BED              |                                         |
| DRAWING<br>Headboard — Shop Drawings | DRAWING NO.<br>Headboard-Shop_Blueprint |
| REV<br>2.5                           | SHEET<br>5 OF 5                         |