


NIGHTSTAND — OVERALL ENVELOPE

MIRROR PAIR · CANTILEVERED FROM THE HEADBOARD REAR · ONE SHOWN




GRAPHIC SCALE (FEET) · s = 21 px/in

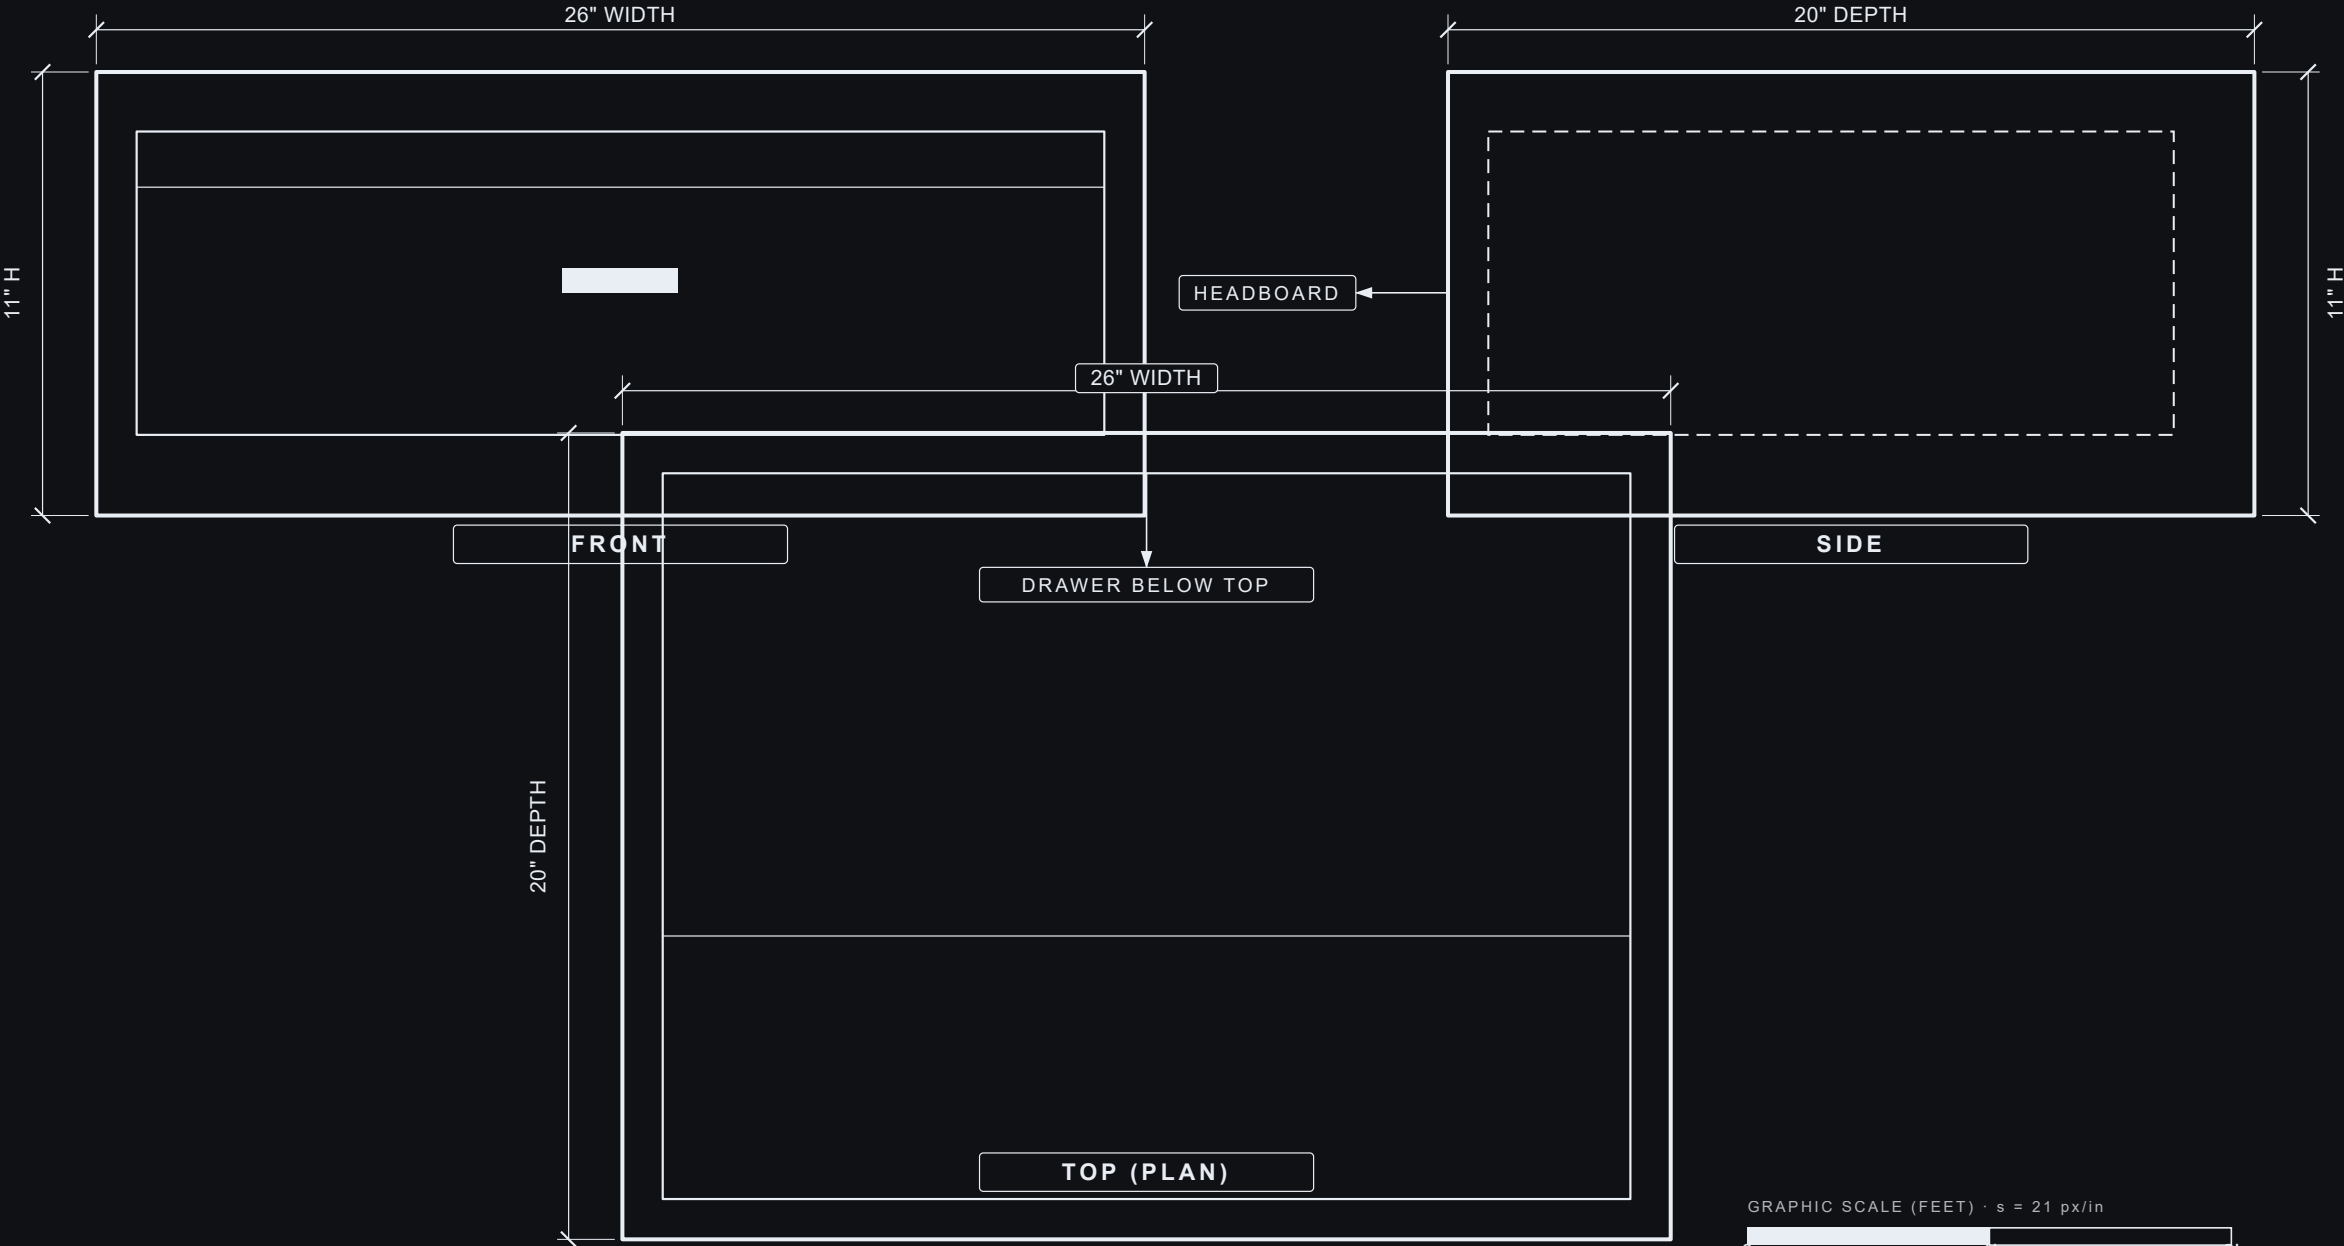

PROJECT HEIRLOOM BED		
DRAWING Nightstand — Construction Set		DRAWING NO. Nightstands-Shop_Blueprint
REV 1.8	SHEET 1 OF 5	

PART DRAWINGS & CUT LIST

1 TOP / BOTTOM PANEL
0.75" THK · ×2

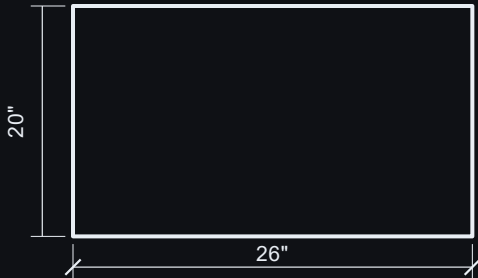


2 SIDE PANEL
0.75" THK · ×2




3 BACK PANEL
0.75" THK · ×1



4 DRAWER BOX
×1



5 DRAWER FACE
1" THK · ×1

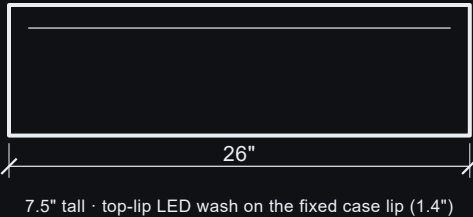

6 RECEIVER CLEAT
×1 (per side)



full-depth; captive-nut mount to the headboard rear
receiver centres ±51" off the bed CL — see sheet 4

CUT LIST


#	PART	QTY	SIZE (in)	NOTES
1	Top panel	2	0.75 × 20 × 26	one top + one bottom (per nightstand)
2	Side panel	4	0.75 × 11 × 20	two per nightstand (mirror pair = 4 total)
3	Back panel	2	0.75 × 11 × 26	captive-nut ports → headboard receiver
4	Drawer box	2	interior ~22 × 18 × 7	soft-close, full-extension (one per nightstand)
5	Drawer face	2	1 × 26 × 7.5	solid top; fixed case lip (1.4") carries the LED wash
6	Receiver cleat	2	as req'd	full-depth; the cantilever mount to the headboard rear
—	Sizes nominal — confirm against the headboard receiver setout (sheet 4).			

PROJECT HEIRLOOM BED	
DRAWING Nightstand — Construction Set	DRAWING NO. Nightstands-Shop_Blueprint
REV 1.8	SHEET 2 OF 5

SECTION DETAILS
SECTION A-A · SIDE (CANTILEVER)



DETAIL B — CAPTIVE-NUT BOLT JOINT

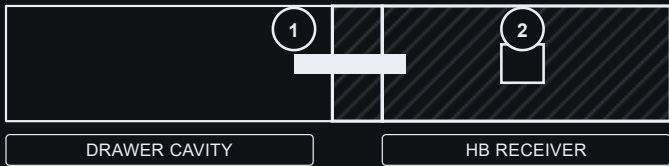

- 1 Machine bolt — driven from inside the drawer cavity, through the back panel
- 2 Square nut — mortised + retained in the full-depth headboard receiver

PROJECT HEIRLOOM BED	
DRAWING Nightstand — Construction Set	DRAWING NO. Nightstands-Shop_Blueprint
REV 1.8	SHEET 3 OF 5


CRITICAL INTERFACES

CANTILEVER MOUNT · back panel → full-depth headboard receiver (captive-nut)


RECEIVER SETOUT — PLAN AT BED CENTRELINE



BACK PANEL — MOUNT FACE

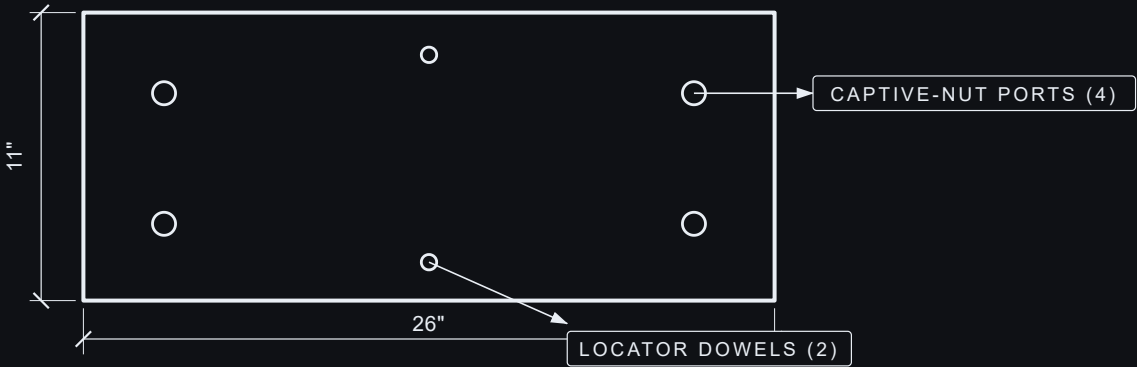

DETAIL A — CAPTIVE-NUT JOINT (PLAN)

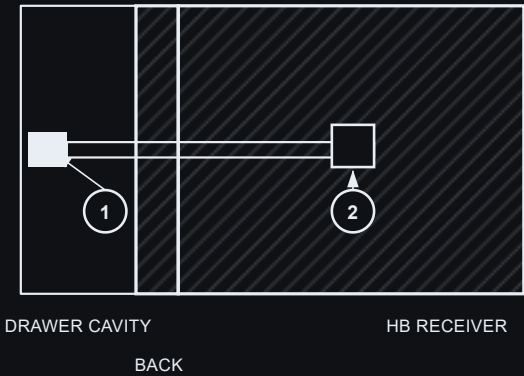

- 1 Machine bolt — driven from inside the drawer cavity
- 2 Square nut — mortised + retained in the headboard receiver

The nightstand hangs entirely on the headboard rear receiver — 4 captive-nut bolts (driven from inside the drawer cavity) clamp the back panel to a full-depth ash receiver; 2 locator dowels set it before clamping (no steel arm). Hardware on sheet 5. Receiver is built into the headboard (its sheet). Receiver centres sit ±51" off the bed centreline (see the setout plan above) — confirm against the headboard sheet.

PROJECT HEIRLOOM BED	
DRAWING Nightstand — Construction Set	DRAWING NO. Nightstands-Shop_Blueprint
REV 1.8	SHEET 4 OF 5

HARDWARE SCHEDULE

#	ITEM	QTY	SPECIFICATION	LOCATION / NOTE
1	Drawer slide	2 pr	Undermount soft-close, FULL-EXTENSION	One drawer per nightstand (mirror pair)
2	Captive-nut bolt	8	Machine bolt + mortised square nut	Back panel → headboard receiver · 4 per side (driven from inside the cavity)
3	Locator dowel	4	Ash dowel (as req'd)	Sets each nightstand before the bolts clamp · 2 per side
4	Top-lip LED channel	a/r	Per LED spec (supplied separately)	Fixed case lip (1.4") — luminaire on the case, NOT the drawer

Cantilever connection — the nightstand carries no floor or base load; the headboard receiver + captive-nut bolts take the full moment.

Mount + dowel positions locate on sheet 4 (Critical Interfaces). The receiver itself is part of the headboard (built on its sheet). Joinery + grain not specified here.

PROJECT HEIRLOOM BED	
DRAWING Nightstand — Construction Set	DRAWING NO. Nightstands-Shop_Blueprint
REV 1.8	SHEET 5 OF 5