


NIGHTSTAND — SHOP DRAWINGS · OVERALL ENVELOPE

MIRROR PAIR · CANTILEVERED FROM THE HEADBOARD REAR · ONE SHOWN

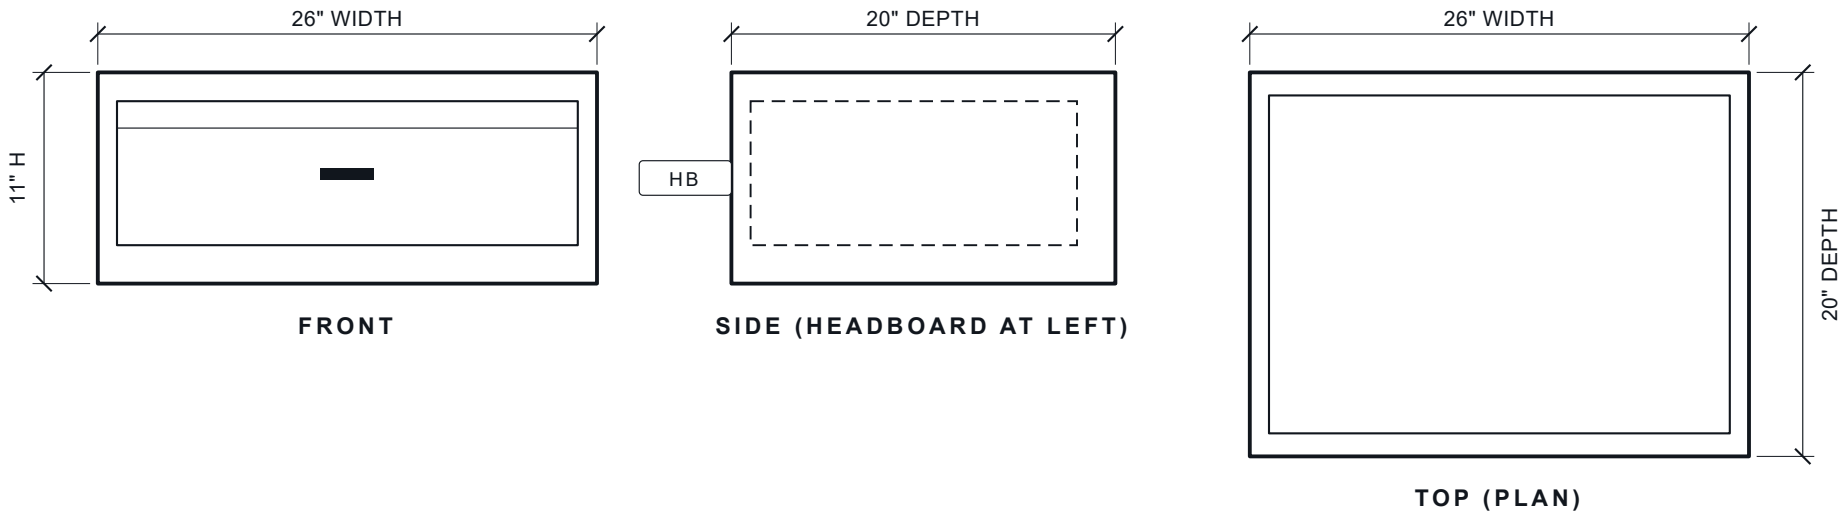

SHEETS IN THIS SET

- 1 OVERALL ENVELOPE (this sheet)
- 2 PART DRAWINGS + CUT LIST
- 3 SECTION DETAILS
- 4 CRITICAL INTERFACES
- 5 HARDWARE SCHEDULE

GENERAL NOTES

- All dimensions in inches ("). AFF = above finished floor. Figured dimensions govern — DO NOT scale.
- Mirror pair (2). Cabinet body 26 W × 20 D × 11 H; bottom 17" AFF, top 28" AFF; centered ±51 off the bed CL.
- CANTILEVERED — hangs on a full-depth headboard receiver (captive-nut bolts). NO floor / base contact.
- One soft-close full-extension drawer + a top-lip LED wash. Joinery + grain at builder's discretion.

GRAPHIC SCALE (FEET) · s = 10 px/in



PROJECT
HEIRLOOM BED

DRAWING
Nightstand — Shop Drawings


DRAWING NO.
Nightstands-Shop_Blueprint

REV
1.1


SHEET
1 OF 5

PART DRAWINGS & CUT LIST

1 TOP / BOTTOM PANEL
0.75" THK · ×2

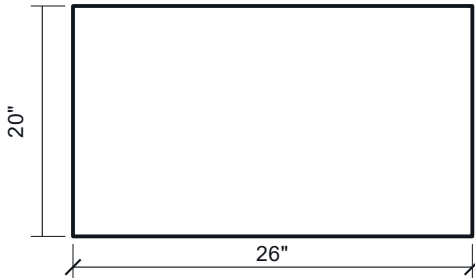

2 SIDE PANEL
0.75" THK · ×2

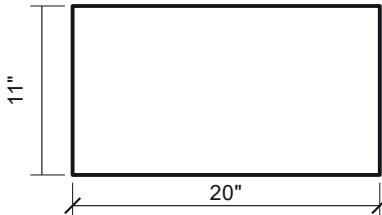


3 BACK PANEL
0.75" THK · ×1



11" tall · captive-nut ports → headboard receiver


4 DRAWER BOX
×1



interior ~22 × 18 × 7

soft-close, full-extension

5 DRAWER FACE
1" THK · ×1

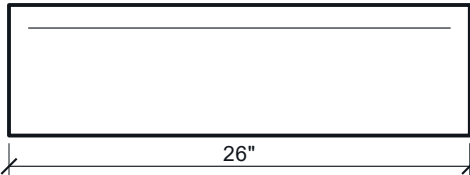

7.5" tall · top-lip LED wash on the fixed case lip (1.4")

6 RECEIVER CLEAT
×1 (per side)



full-depth; captive-nut mount to the headboard rear


CUT LIST

#	PART	QTY	SIZE (in)	NOTES
1	Top panel	2	0.75 × 20 × 26	one top + one bottom (per nightstand)
2	Side panel	4	0.75 × 11 × 20	two per nightstand (mirror pair = 4 total)
3	Back panel	2	0.75 × 11 × 26	captive-nut ports → headboard receiver
4	Drawer box	2	interior ~22 × 18 × 7	soft-close, full-extension (one per nightstand)
5	Drawer face	2	1 × 26 × 7.5	solid top; fixed case lip (1.4") carries the LED wash
6	Receiver cleat	2	per builder	full-depth; the cantilever mount to the headboard rear
—	Sizes nominal — builder confirms against the headboard receiver setout (sheet 4).			

PROJECT HEIRLOOM BED	
DRAWING Nightstand — Shop Drawings	DRAWING NO. Nightstands-Shop_Blueprint
REV 1.1	SHEET 2 OF 5

SECTION DETAILS

SECTION A-A · SIDE (CANTILEVER)

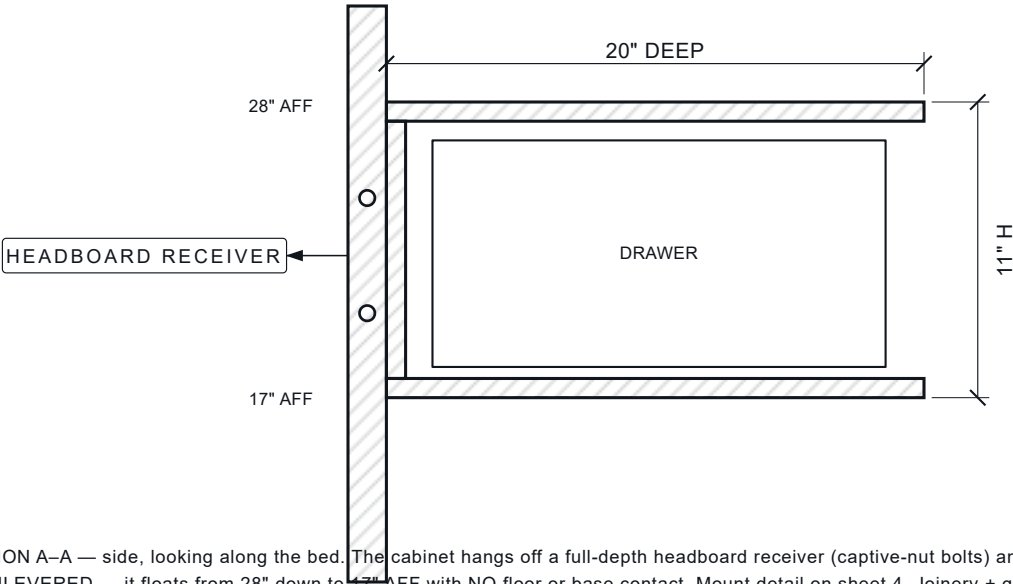


SECTION A-A — side, looking along the bed. The cabinet hangs off a full-depth headboard receiver (captive-nut bolts) and projects 20" forward.
CANTILEVERED — it floats from 28" down to 17" AFF with NO floor or base contact. Mount detail on sheet 4. Joinery + grain at builder's discretion.


PROJECT HEIRLOOM BED		
DRAWING Nightstand — Shop Drawings		DRAWING NO. Nightstands-Shop_Blueprint
REV	1.1	SHEET 3 OF 5

CRITICAL INTERFACES

CANTILEVER MOUNT · back panel → full-depth headboard receiver (captive-nut)

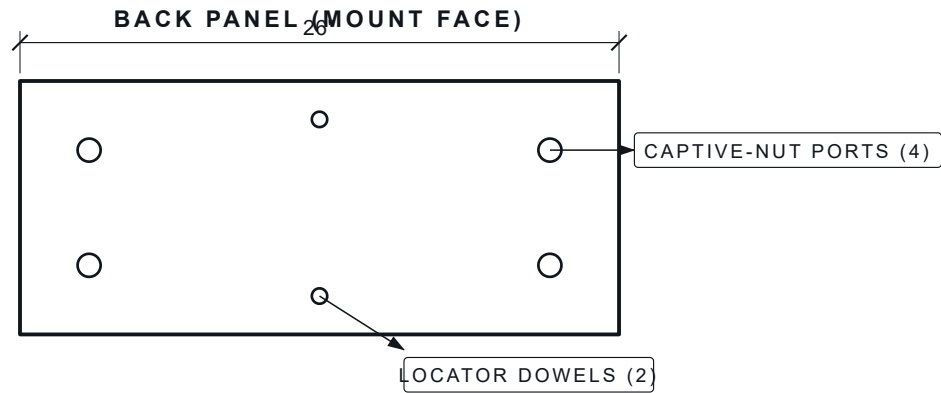

DETAIL A — CAPTIVE-NUT JOINT (PLAN)

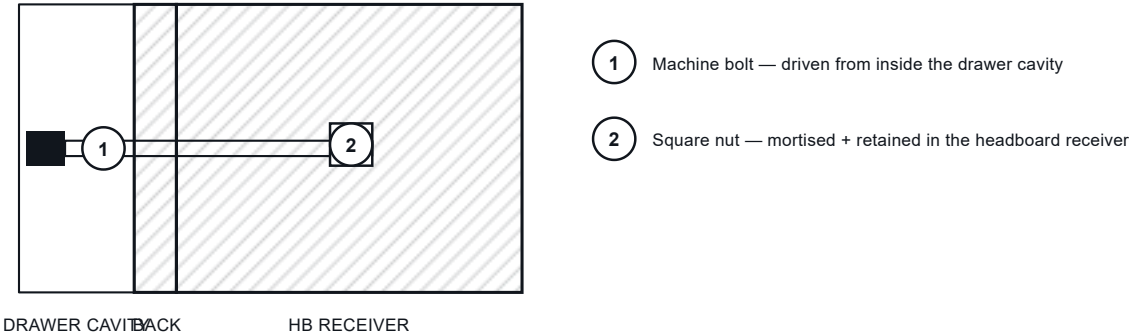

The nightstand hangs entirely on the headboard rear receiver — 4 captive-nut bolts (driven from inside the drawer cavity) clamp the back panel to a full-depth ash receiver; 2 locator dowels set it before clamping (no steel arm). Hardware on sheet 5. Receiver is built into the headboard (its sheet).

PROJECT HEIRLOOM BED	
DRAWING Nightstand — Shop Drawings	DRAWING NO. Nightstands-Shop_Blueprint
REV 1.1	SHEET 4 OF 5

HARDWARE SCHEDULE

#	ITEM	QTY	SPECIFICATION	LOCATION / NOTE
1	Drawer slide	2 pr	Undermount soft-close, FULL-EXTENSION	One drawer per nightstand (mirror pair)
2	Captive-nut bolt	8	Machine bolt + mortised square nut	Back panel → headboard receiver · 4 per side (driven from inside the cavity)
3	Locator dowel	4	Ash dowel (per builder)	Sets each nightstand before the bolts clamp · 2 per side
4	Top-lip LED channel	a/r	Per LED spec (owner-supplied)	Fixed case lip (1.4") — luminaire on the case, NOT the drawer

Cantilever connection — the nightstand carries no floor or base load; the headboard receiver + captive-nut bolts take the full moment.
Mount + dowel positions locate on sheet 4 (Critical Interfaces). The receiver itself is part of the headboard (built on its sheet). Joinery + grain at builder's discretion.

PROJECT HEIRLOOM BED	
DRAWING Nightstand — Shop Drawings	DRAWING NO. Nightstands-Shop_Blueprint
REV 1.1	SHEET 5 OF 5