



HEADBOARD — OVERALL ENVELOPE

130" W · 72" H · 8" D

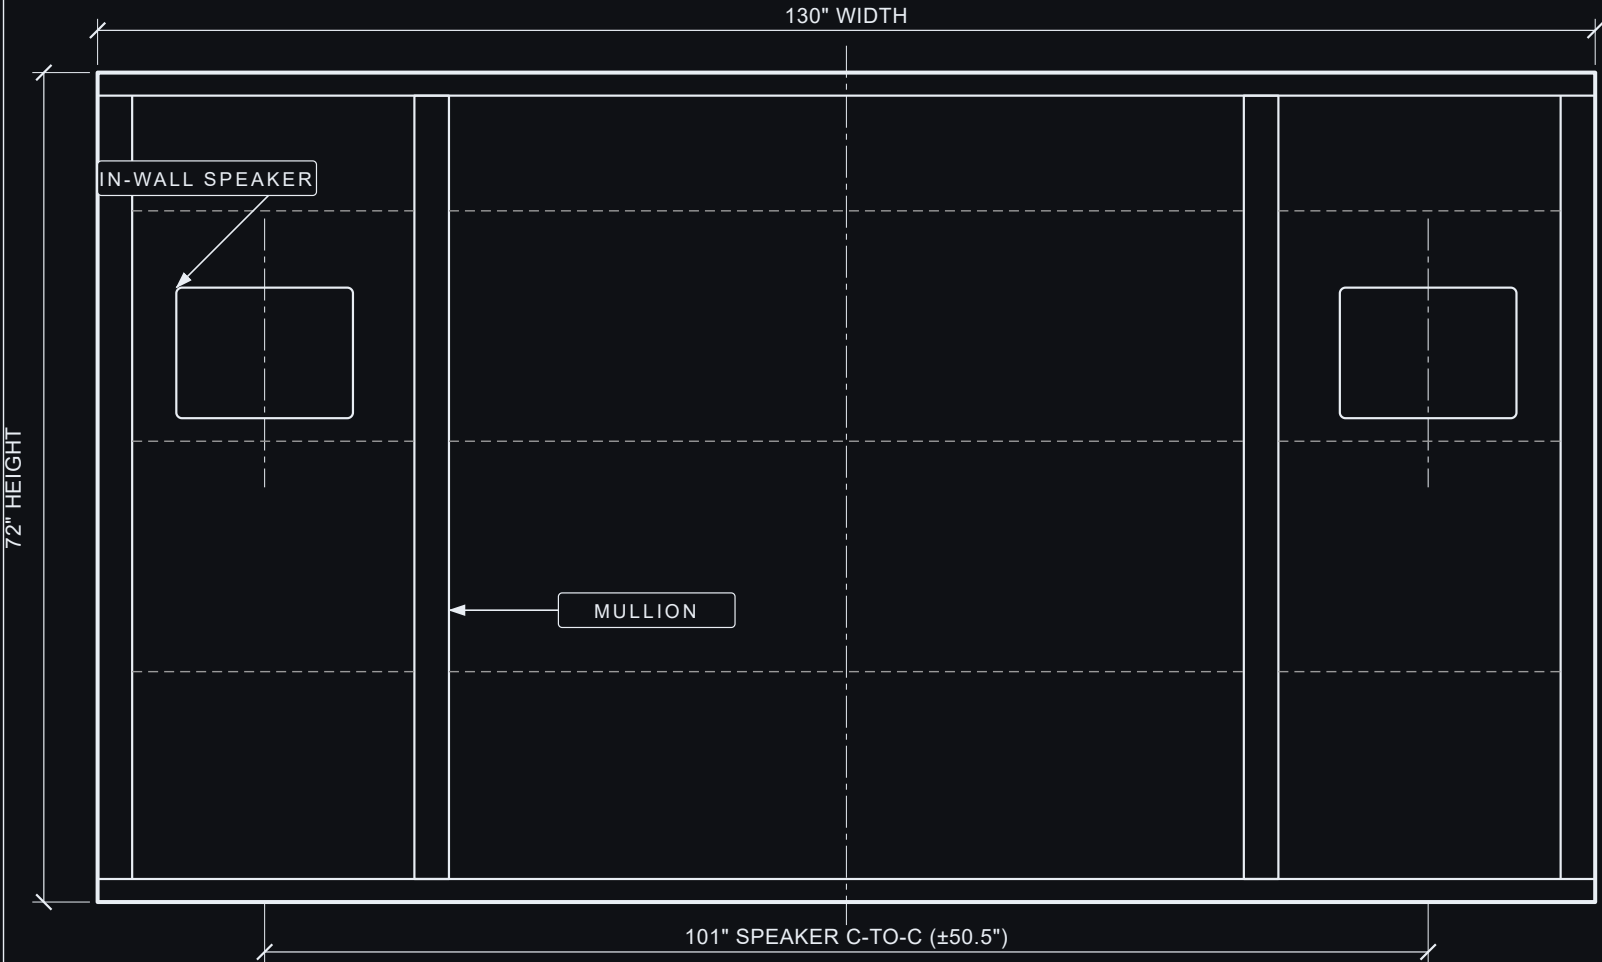

FRONT VIEW

REAR VIEW — OPEN BACK

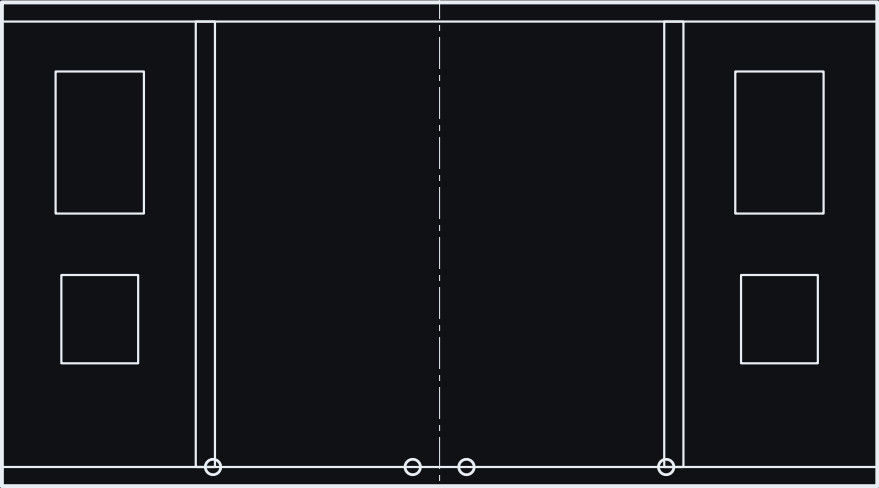

SIDE VIEW



FIGURED DIMS GOVERN — NOT TO A SINGLE SCALE

PROJECT
HEIRLOOM BED

DRAWING
Headboard — Cabinet Construction


DRAWING NO.
Headboard-Shop_Blueprint

REV
4.6

SHEET
1 OF 5

PART DRAWINGS & CUT LIST


1 TOP CAP
2" THK · ×1

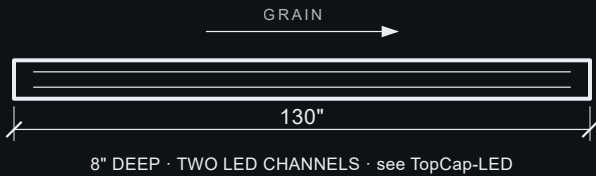

2 BOTTOM RAIL
2" THK · ×1




3 SIDE STILE
2" W · ×2

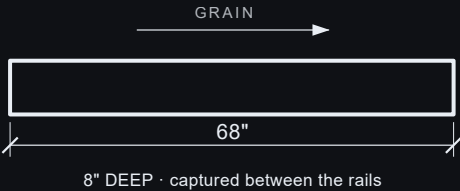

4 MULLION
4" W · ×2 (±36")



5 SKIN — OUTER
7/8" THK · ×8



6 SKIN — CENTER
7/8" THK · ×4




CUT LIST

#	PART	QTY	THK	WIDTH	LENGTH	GRAIN	NOTES
1	Top cap	1	2"	8"	130"	length	LED channels routed · see TopCap-LED
2	Bottom rail	1	2"	8"	130"	length	full-width bottom frame member
3	Side stile	2	2"	8"	68"	length	captured between rails · mirror pair
4	Mullion	2	4"	8"	68"	length	±36" · LED relief at top
5	Front skin — outer	8	7/8"	25"	20"	horiz	courses 18/20/20/10" · speaker course holds cutout
6	Front skin — center	4	7/8"	68"	20"	horiz	courses 18/20/20/10" · grain horizontal
7	Course cross-rail	9	1.25"	7"	25/68"	length	behind course seams · rear support

FIGURED DIMS GOVERN — PARTS NOT TO A SINGLE SCALE

PROJECT HEIRLOOM BED	
DRAWING Headboard — Cabinet Construction	DRAWING NO. Headboard-Shop_Blueprint
REV 4.6	SHEET 2 OF 5

SECTION DETAILS

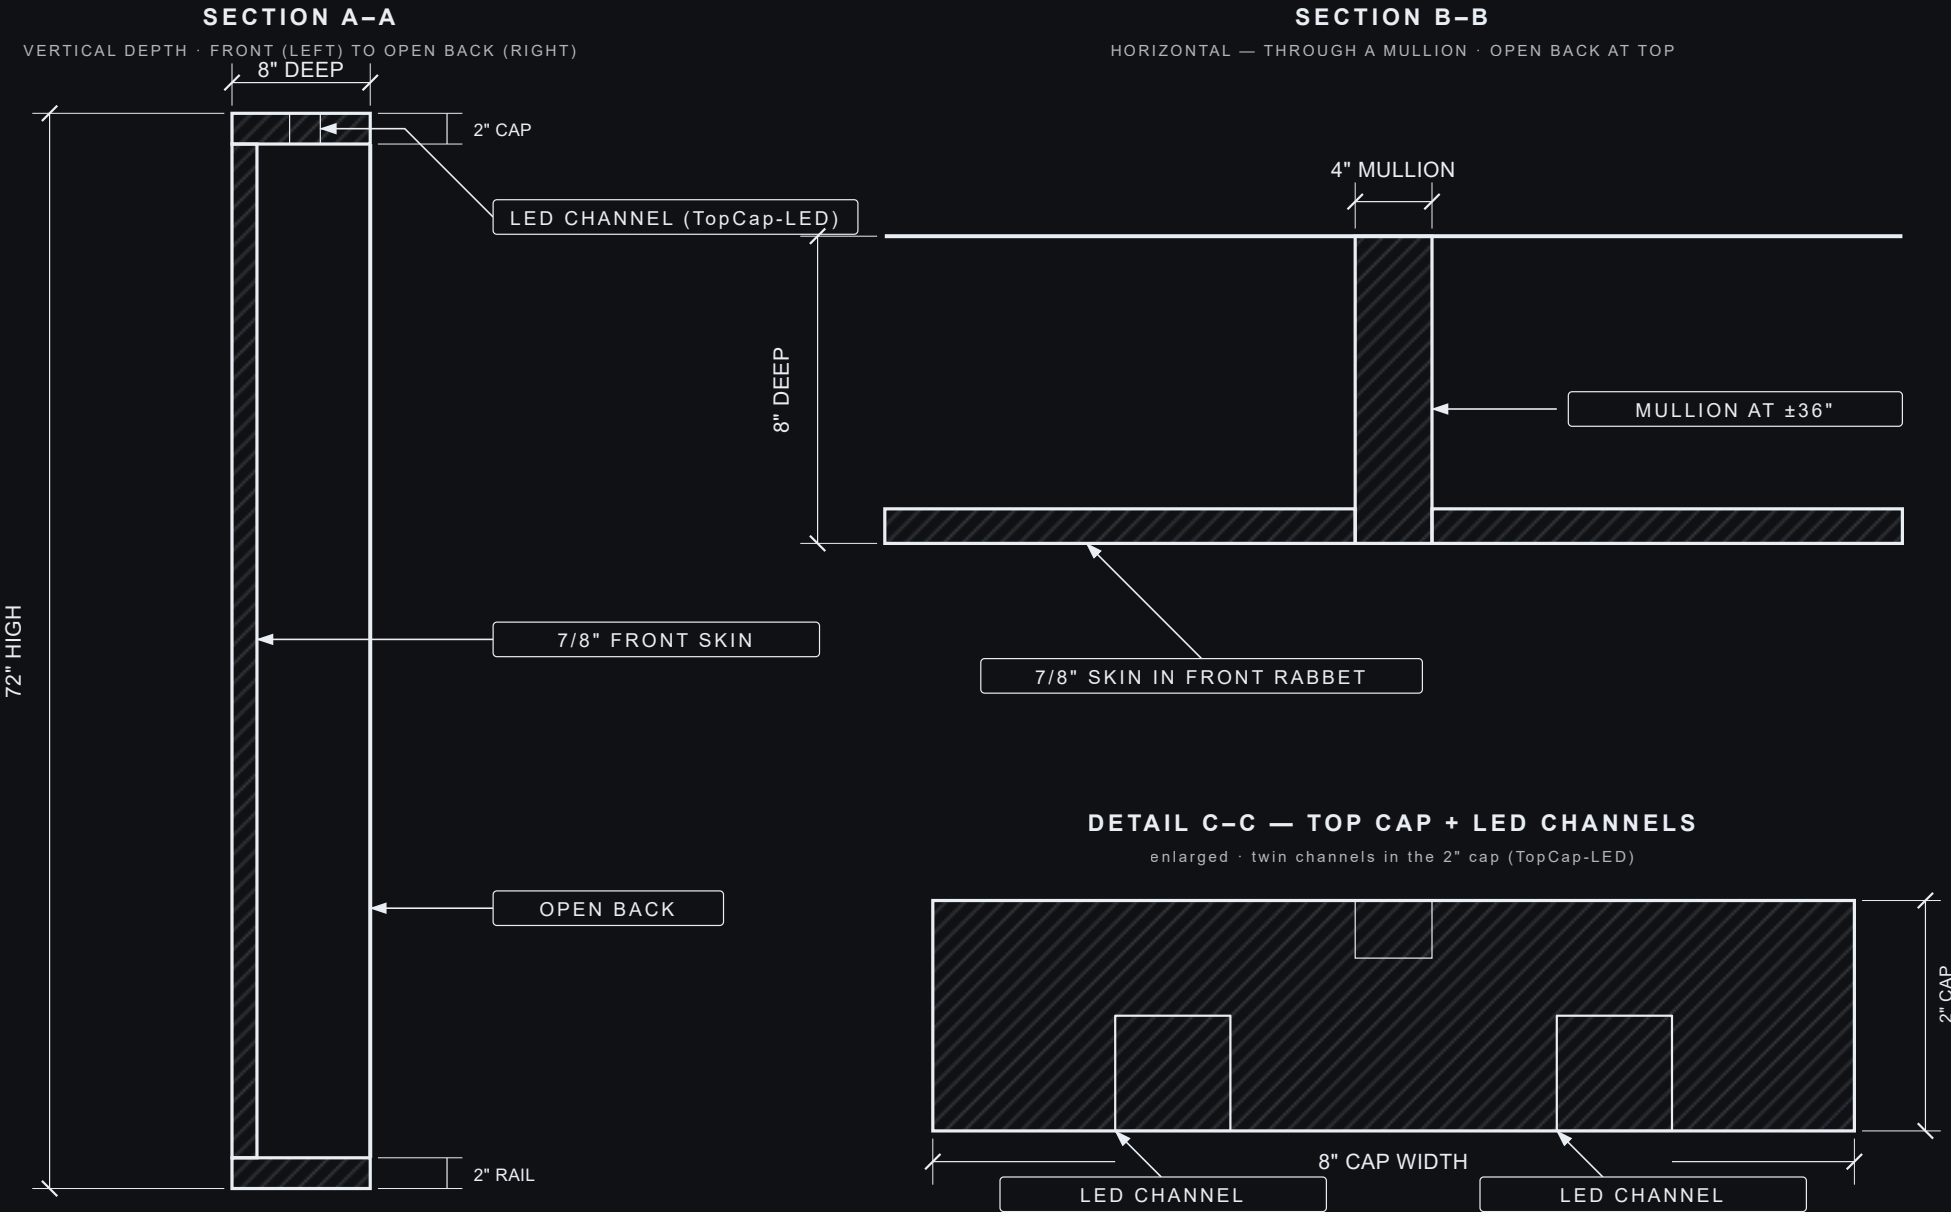

FIGURED DIMS GOVERN — NOT TO A SINGLE SCALE

PROJECT
HEIRLOOM BED

DRAWING
Headboard — Cabinet Construction


REV
4.6

DRAWING NO.
Headboard-Shop_Blueprint

SHEET
3 OF 5

CRITICAL INTERFACES

HEADBOARD REAR (OPEN-BACK) · base bolts · nightstand receivers · speakers · USB-C

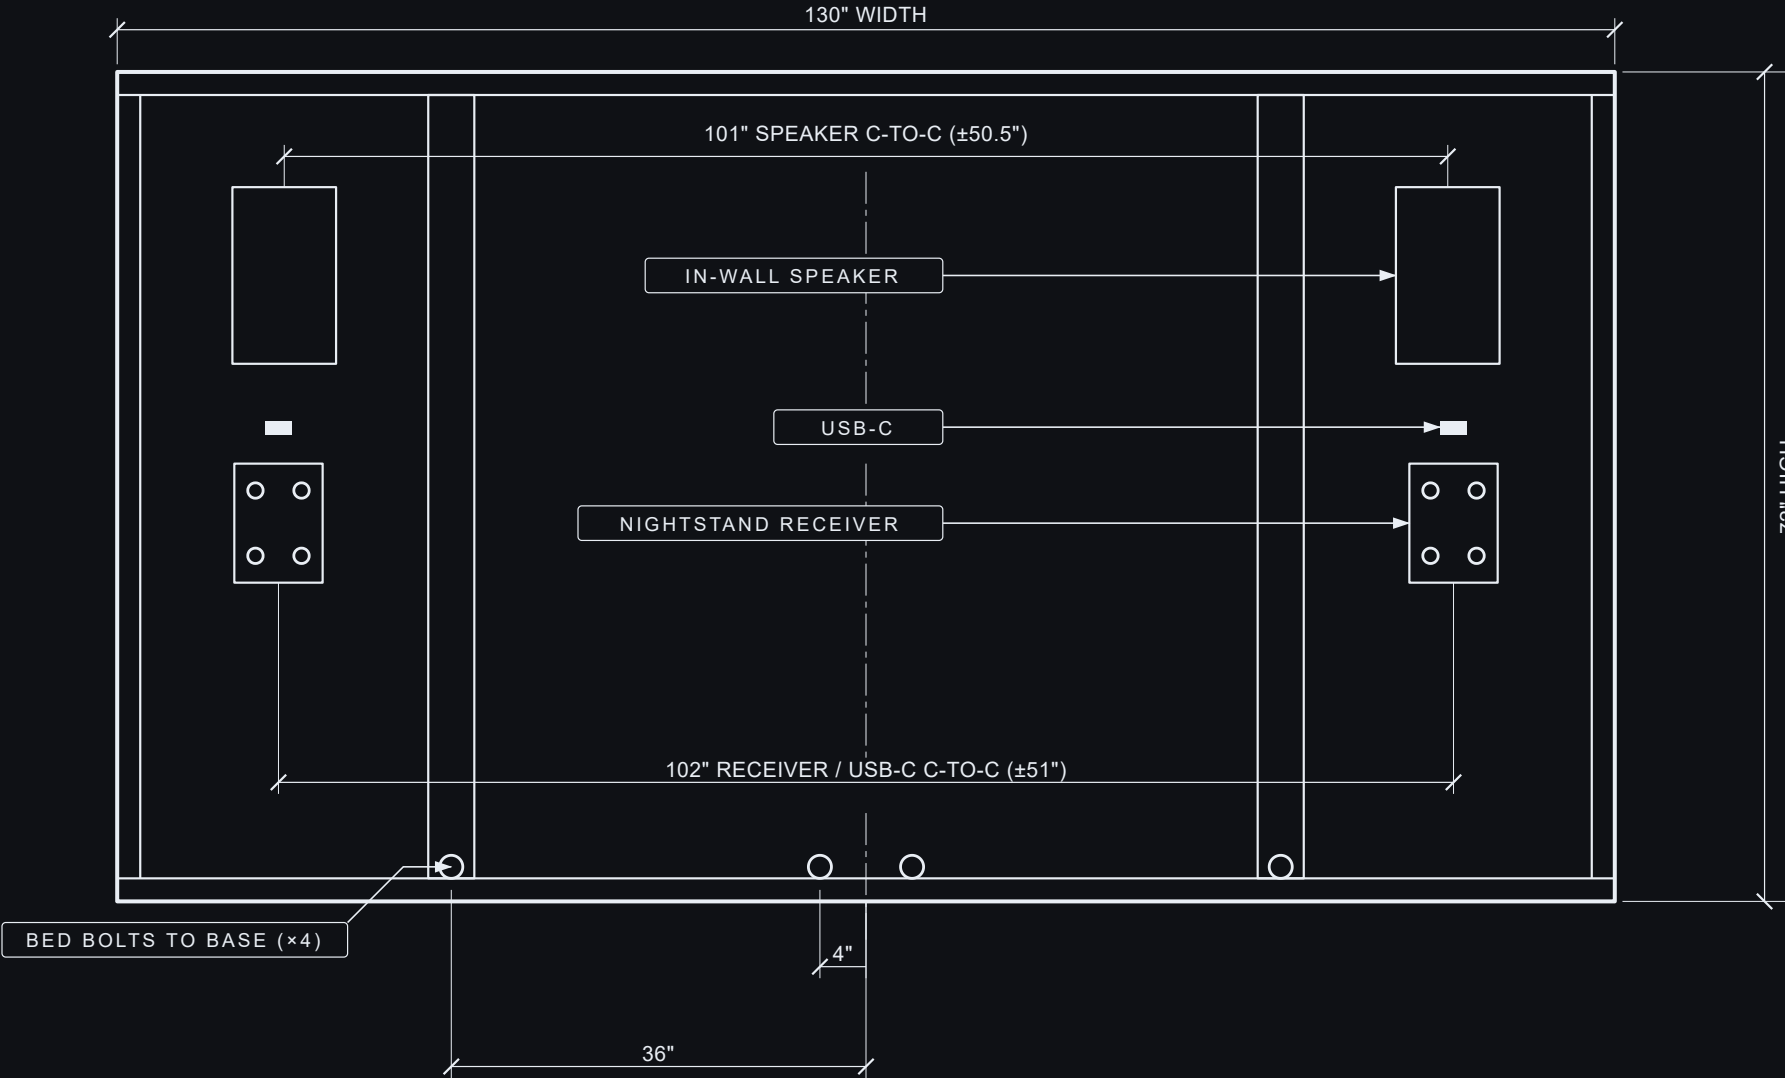

SPEAKER CUTOUT 20.71" × 11.26" · HORIZONTAL · flush
Cutouts straight · no toe-in · hardware on sheet 5




PROJECT HEIRLOOM BED	
DRAWING Headboard — Cabinet Construction	DRAWING NO. Headboard-Shop_Blueprint
REV 4.6	SHEET 4 OF 5

HARDWARE SCHEDULE


#	ITEM	QTY	SPECIFICATION	LOCATION / NOTE
1	Bed bolt	4	3/8"-16 steel, hex head; length to suit	Bottom rail to base · ±36" + ±4"
2	Cross-dowel (barrel nut)	4	3/8"-16 steel	In the base; receives each bed bolt
3	Nightstand receiver bolt	8	Captive square-nut + machine bolt	Nightstand to rear receiver · ×4/side
4	USB-C insert	4	Supplied separately · four-port locking	Headboard face · ±51" · opening cut to suit
5	In-wall speaker	2	Supplied separately · in-wall	Cutout ±50.5" · 20.71" × 11.26" H · flush

DETAIL — BED-BOLT CONNECTION (HEADBOARD TO BASE)

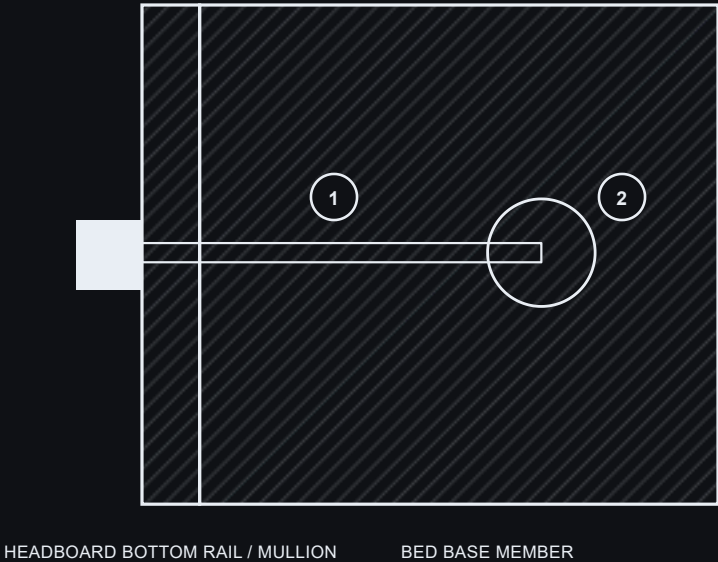

DETAIL — NIGHTSTAND RECEIVER

rear · one side (mirror-imaged) · receiver = headboard structure

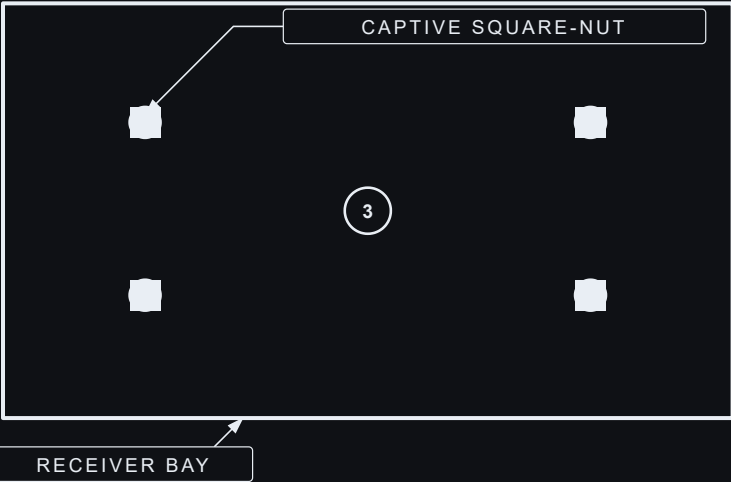

- 1

3/8" bed bolt — steel, hex head (×4 · ±36" / ±4")
- 2

Cross-dowel / barrel nut — set in the base (×4)
- 3

Captive square-nut + machine bolt — nightstand receiver (×8 total)
- Positions on sheet 4 · LED on TopCap-LED
Provide cutouts only · lengths to suit

FIGURED DIMS GOVERN — NOT TO A SINGLE SCALE

PROJECT HEIRLOOM BED	
DRAWING Headboard — Cabinet Construction	DRAWING NO. Headboard-Shop_Blueprint
REV 4.6	SHEET 5 OF 5