


HEADBOARD — SHOP DRAWINGS · OVERALL ENVELOPE

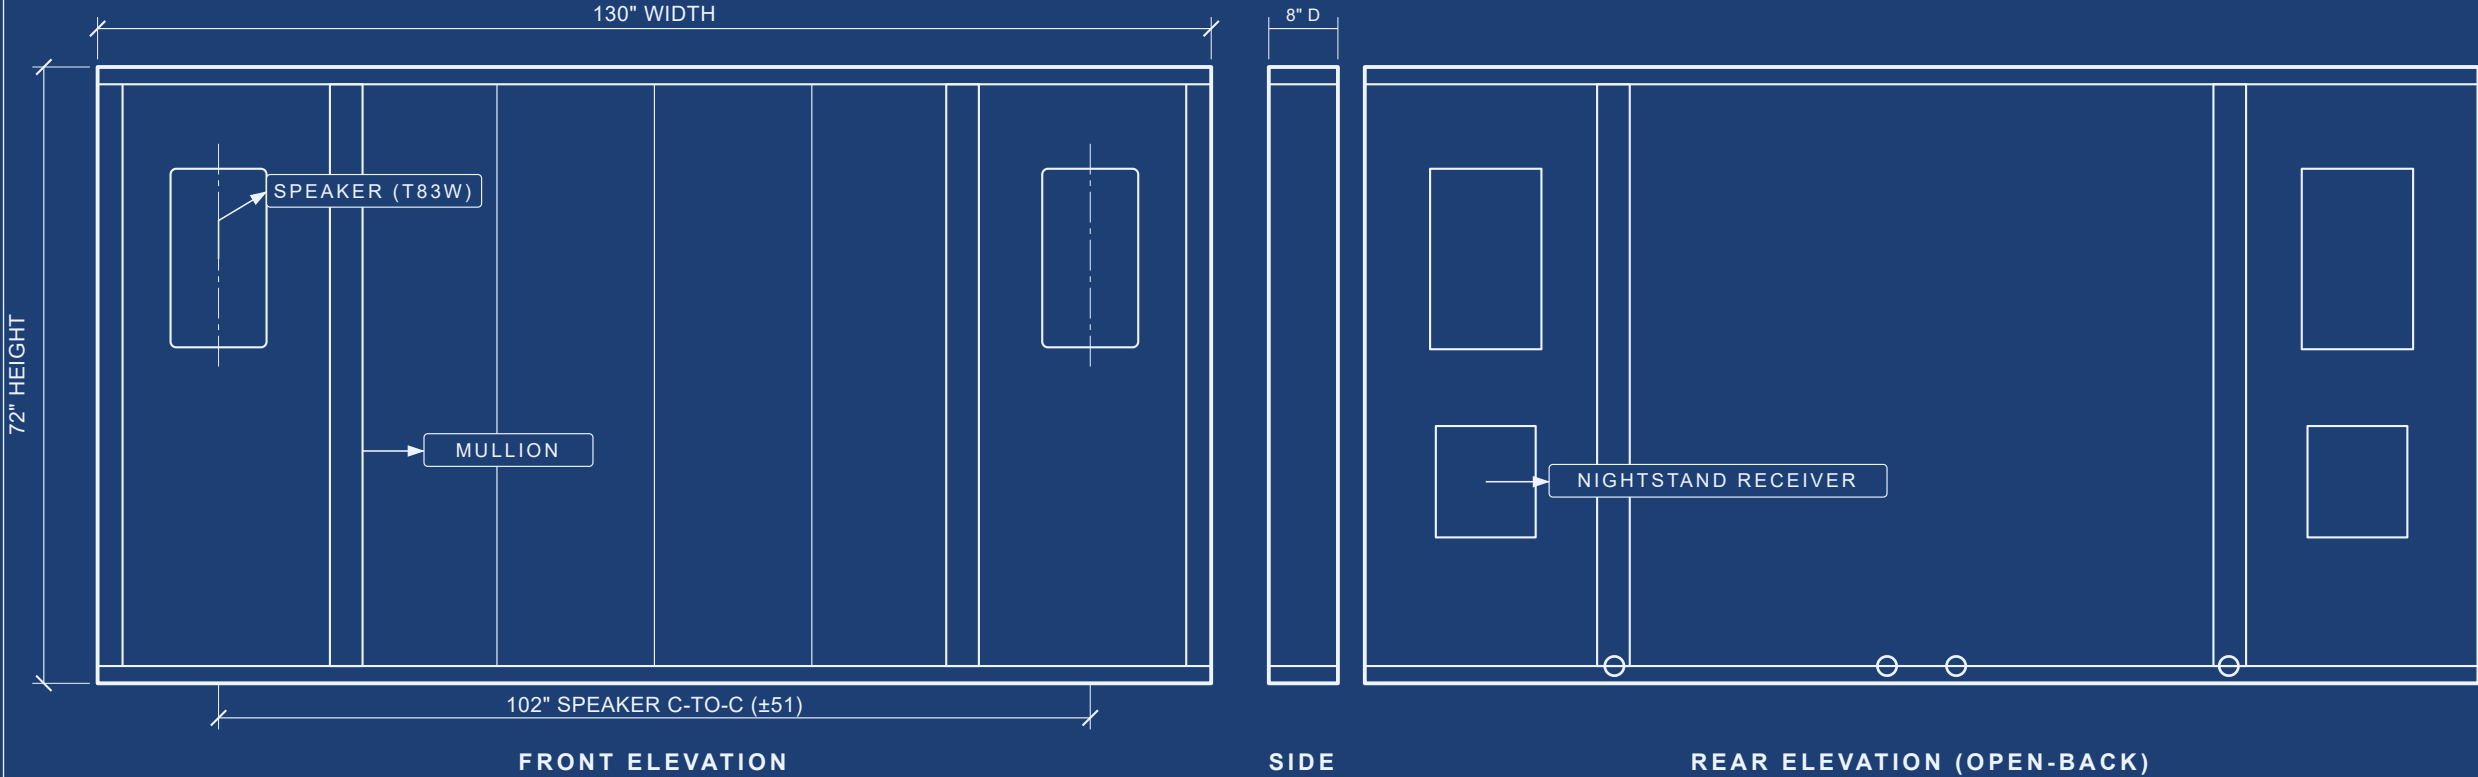

SHEETS IN THIS SET

- 1 OVERALL ENVELOPE (this sheet)
- 2 PART DRAWINGS + CUT LIST
- 3 SECTION DETAILS
- 4 CRITICAL INTERFACES
- 5 HARDWARE SCHEDULE

GENERAL NOTES

- 1. All dimensions in inches ("). AFF = above finished floor. Figured dimensions govern — DO NOT scale.
- 2. Headboard overall 130 W × 72 H × 8 D. Open-back rail-and-stile frame; six 1" front panels.
- 3. Mullions at ±36; bolts to the base at ±36 + ±4. Speakers / receivers / USB-C centered at ±51.
- 4. Joinery method + grain at builder's discretion. Parts (sheet 2) NOT to a single scale — the cut list governs.

GRAPHIC SCALE (FEET) · ELEVATIONS s = 4.46 px/in



|                                      |                                         |
|--------------------------------------|-----------------------------------------|
| PROJECT<br>HEIRLOOM BED              |                                         |
| DRAWING<br>Headboard — Shop Drawings | DRAWING NO.<br>Headboard-Shop_Blueprint |
| REV<br>1.3                           | SHEET<br>1 OF 5                         |

PART DRAWINGS & CUT LIST

1 TOP CAP  
2" THK · ×1



2 BOTTOM RAIL  
2" THK · ×1




3 SIDE STILE  
2" W · ×2



4 MULLION  
4" W · ×2 (at ±36)



5 PANEL — OUTER  
1" THK · ×2

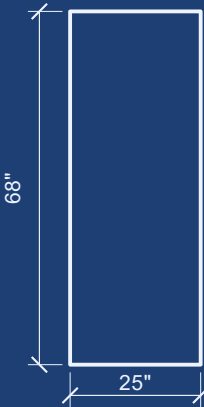

6 PANEL — CENTER  
1" THK · ×4




CUT LIST

| # | PART                 | QTY | THK | WIDTH | LENGTH | NOTES                                            |
|---|----------------------|-----|-----|-------|--------|--------------------------------------------------|
| 1 | Top cap              | 1   | 2"  | 8"    | 130"   | LED channels routed — see TopCap-LED             |
| 2 | Bottom rail          | 1   | 2"  | 8"    | 130"   | full-width bottom frame member                   |
| 3 | Side stile           | 2   | 2"  | 8"    | 68"    | captured between the rails (mirror pair)         |
| 4 | Mullion              | 2   | 4"  | 8"    | 68"    | at x = ±36; W-relief at top for the LED channels |
| 5 | Front panel — outer  | 2   | 1"  | 25"   | 68"    | stile-to-mullion bay; fit to the frame opening   |
| 6 | Front panel — center | 4   | 1"  | ~17"  | 68"    | between the mullions; four equal; fit to opening |

|                                      |                                         |
|--------------------------------------|-----------------------------------------|
| PROJECT<br>HEIRLOOM BED              |                                         |
| DRAWING<br>Headboard — Shop Drawings | DRAWING NO.<br>Headboard-Shop_Blueprint |
| REV<br>1.3                           | SHEET<br>2 OF 5                         |


SECTION DETAILS

SECTION A-A

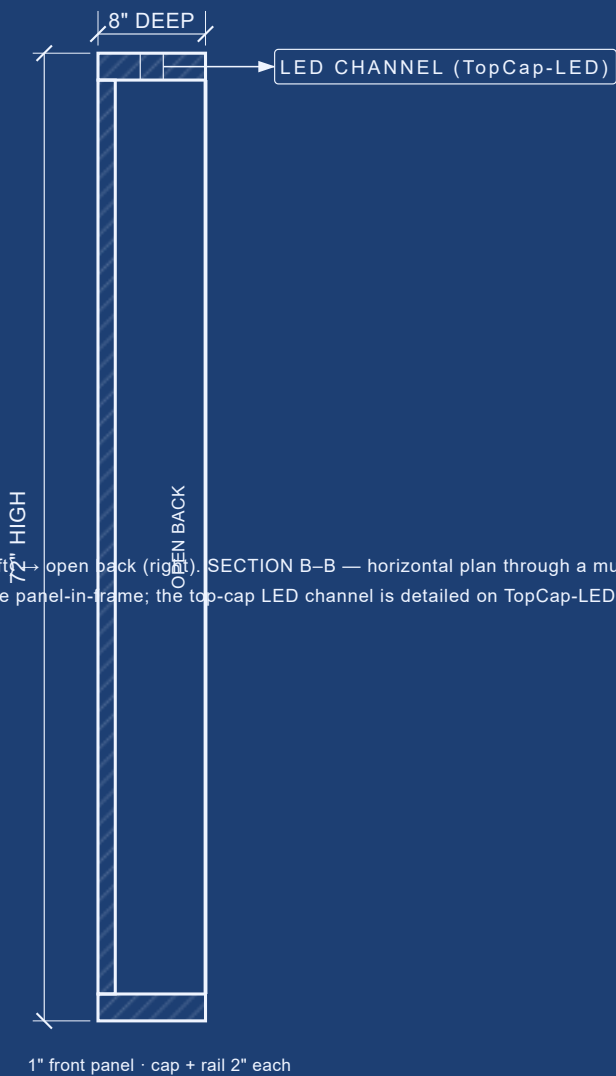

SECTION B-B

PLAN THROUGH A MULLION · OPEN BACK AT TOP

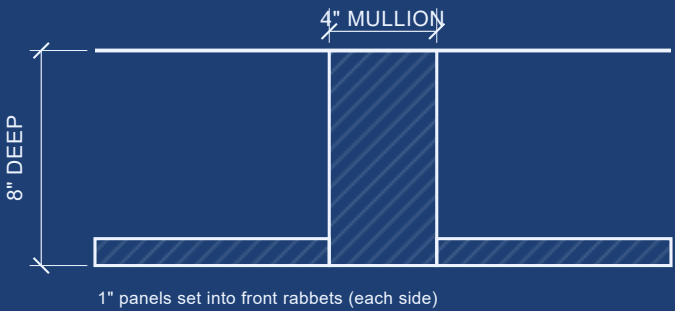


SECTION A-A — vertical, front (left) → open back (right). SECTION B-B — horizontal plan through a mullion.  
Sections show the depth build + the panel-in-frame; the top-cap LED channel is detailed on TopCap-LED. Joint method + grain at builder's discretion. Not to a single scale.

|                                      |     |                                         |
|--------------------------------------|-----|-----------------------------------------|
| PROJECT<br>HEIRLOOM BED              |     |                                         |
| DRAWING<br>Headboard — Shop Drawings |     | DRAWING NO.<br>Headboard-Shop_Blueprint |
| REV                                  | 1.3 | SHEET<br>3 OF 5                         |

CRITICAL INTERFACES

HEADBOARD REAR (OPEN-BACK) · base bolts · nightstand receivers · speakers · USB-C

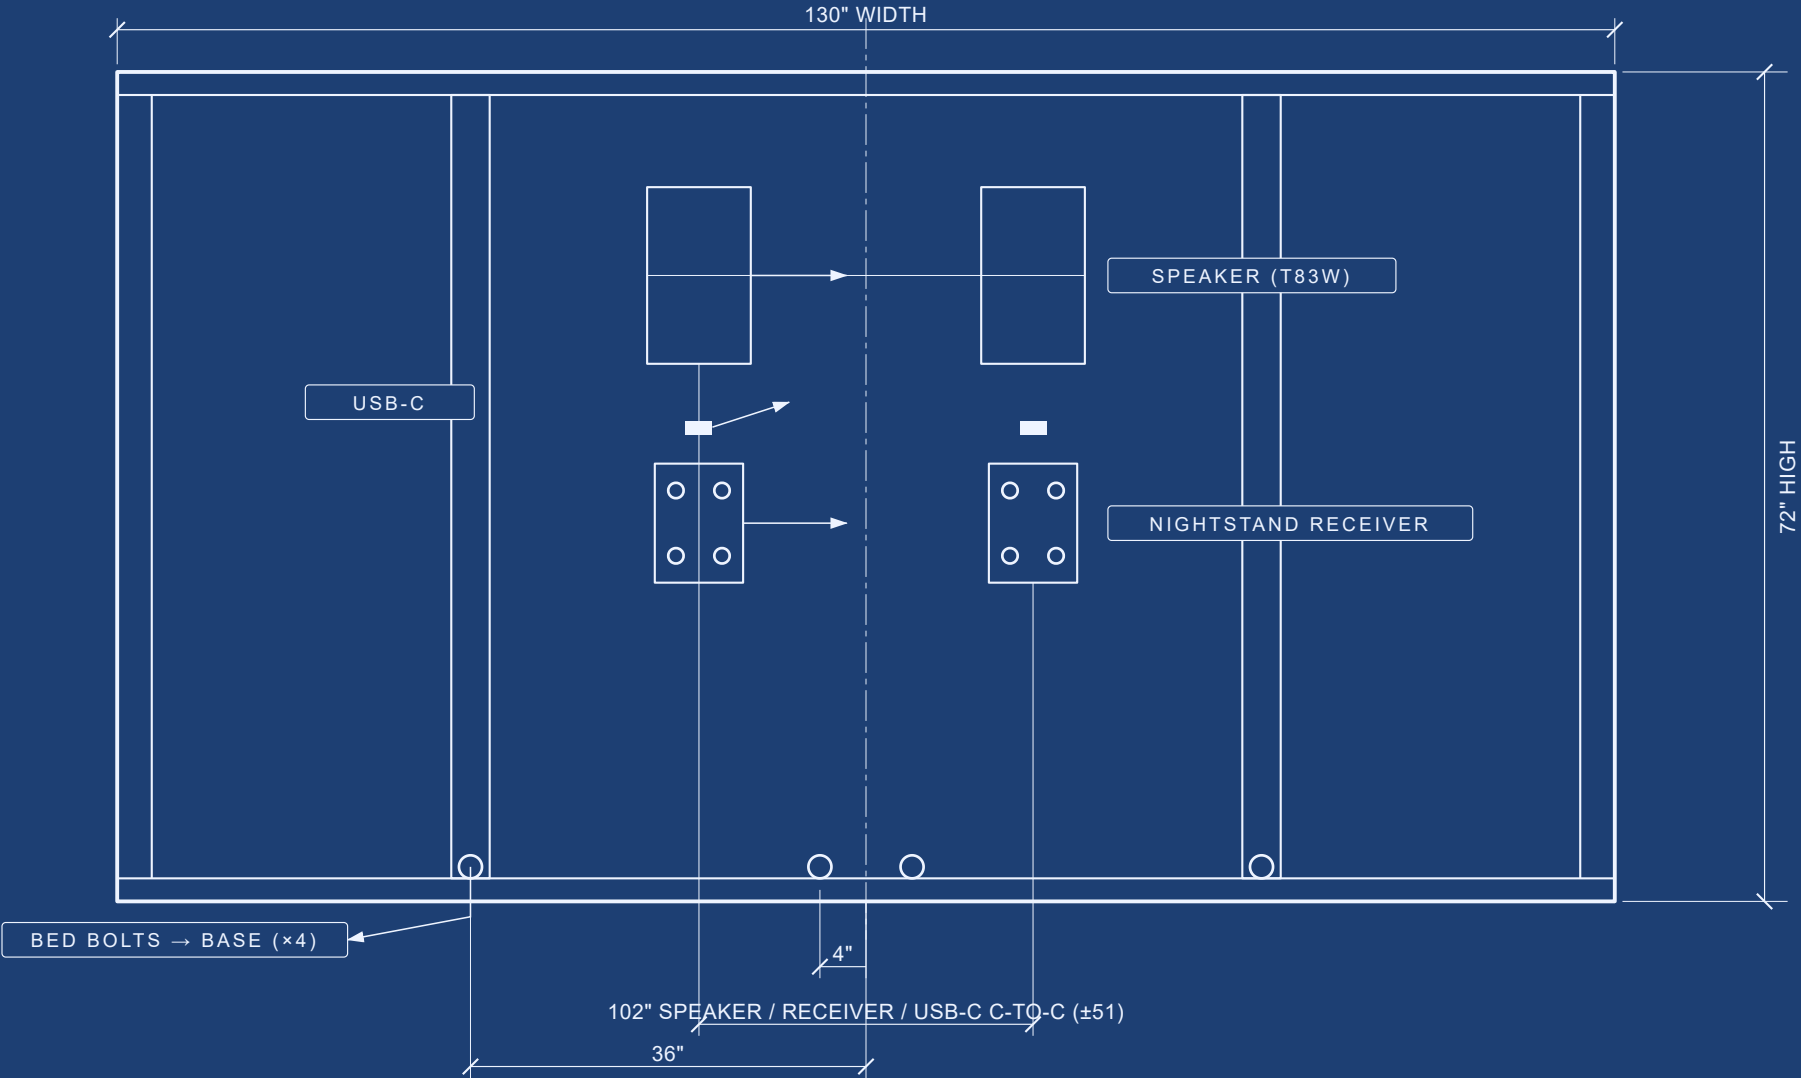


Open-back rail-and-stile frame. Mullions bolt to the base with 4 bed bolts at  $x = \pm 36 \pm 4$  (through the bottom rail).  
Speakers, nightstand receivers, and USB-C ports all center at  $\pm 51$ . Bolt + receiver hardware on sheet 5. Cutouts straight/flush — no toe-in.

|                                      |                                         |
|--------------------------------------|-----------------------------------------|
| PROJECT<br>HEIRLOOM BED              |                                         |
| DRAWING<br>Headboard — Shop Drawings | DRAWING NO.<br>Headboard-Shop_Blueprint |
| REV<br>1.3                           | SHEET<br>4 OF 5                         |

HARDWARE SCHEDULE

| # | ITEM                     | QTY | SPECIFICATION                           | LOCATION / NOTE                                            |
|---|--------------------------|-----|-----------------------------------------|------------------------------------------------------------|
| 1 | Bed bolt                 | 4   | 3/8"-16 steel, hex head; length to suit | Bottom rail → base · x = ±36 + ±4                          |
| 2 | Cross-dowel (barrel nut) | 4   | 3/8"-16 steel                           | In the base; receives each bed bolt                        |
| 3 | Nightstand receiver bolt | 8   | Captive square-nut + machine bolt       | Nightstand → rear receiver (4 per side)                    |
| 4 | USB-C insert             | 4   | Owner-supplied 4-port, locking          | Headboard face · ±51 · ~30" AFF — builder cuts the opening |
| 5 | In-wall speaker          | 2   | Owner-supplied in-wall                  | Cutout ±51 · 11.26 × 20.71 — straight/flush; builder cuts  |

DETAIL — BED-BOLT CONNECTION (HEADBOARD → BASE)

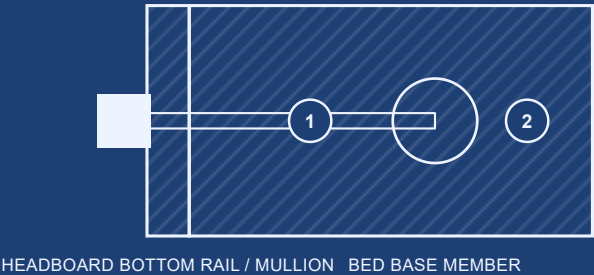

1 3/8" bed bolt — steel, hex head (×4 at ±36 / ±4)

2 Cross-dowel / barrel nut — set in the base (×4)

Carcass joinery + grain at builder's discretion. USB-C inserts + in-wall speakers are owner-installed — the builder provides the cutouts only.  
Bed-bolt + receiver positions locate on sheet 4 (Critical Interfaces). The top-cap LED hardware is on the TopCap-LED sheet.

|                                      |                                         |
|--------------------------------------|-----------------------------------------|
| PROJECT<br>HEIRLOOM BED              |                                         |
| DRAWING<br>Headboard — Shop Drawings | DRAWING NO.<br>Headboard-Shop_Blueprint |
| REV<br>1.3                           | SHEET<br>5 OF 5                         |