

Motion Diffusion Model to Denoising Diffusion GAN: Efficient Motion Sampling

Ronald Campos

University of Central Florida
4000 Central Florida Blvd, Orlando, FL 32816
roncamposj@knights.ucf.edu

Suneet Tipirneni

University of Central Florida
4000 Central Florida Blvd, Orlando, FL 32816
suneet.tipirneni@knights.ucf.edu

Muhammad Asad Haider

University of Central Florida
4000 Central Florida Blvd, Orlando, FL 32816
haider24@knights.ucf.edu

Stefan Werleman

University of Central Florida
4000 Central Florida Blvd, Orlando, FL 32816
stefanwerleman@knights.ucf.edu

Abstract

All existing motion diffusion models use the standard diffusion process which yields high quality samples. However, the standard process for these models can be inefficient. These are one of the challenges with the learning trilemma and this works concerns embedding an existing motion diffusion model into denoising diffusion GANs to create a hybrid architecture of the motion diffusion model. This new hybrid model will satisfy the learning trilemma, thus improving the sampling speed when training and generating a motion sample. <https://github.com/CAP6412-Group-4/denoising-diffusion-gan>

1. Introduction

1.1. Human Motion Diffusion Model

1.2. Improving Sampling

1.3. Integrating Motion Diffusion Model Into DDGAN

2. Related Work

2.1. Human Motion Diffusion Model

2.2. Denoising Diffusion GANs

3. Method

3.1. Motion Diffusion Model Integration

3.2. Adapting The Loss

3.3. Training

4. Experiments

Our implementation of MDM-2-Diffgan (M2D) is applied for the task of text-to-motion generation. We trained our models with $T = 4$ noising steps, using a cosine noise schedule. Experiments were conducted using the Newton cluster which employs two NVIDIA V100 GPUs per node. During the training process of our models, we conducted experiments with varying numbers of epochs, ranging from 200 to 1200, and determined that the most optimal results were achieved with fewer epochs, specifically at the lower end of the range. Training on this lower range took approximately about a day.

The HumanML3D dataset, which was also used by [2], was employed in our text-to-motion generation task. HumanML3D [3] is a combination the HumanAct12 [4]

and Amass [5] datasets, which covers a broad range of activities, such as 'jumping', dancing', and certain other acrobatics. The dataset contains 14,616 motion clips and 44,970 text descriptions.

Our models were trained with a batch size of 128. Our generator used a learning rate of 0.0015, while the learning rate of the discriminator was slightly larger at 0.0001. We employed the same parameters as [2] did with the transformer encoder and used that as our generator: 8 layers, an embedding dimension of 512, a GELU activation function, and dropout with a rate of 0.1. The discriminator uses an embedding dimension of 128, to go along with its 6 downsampling blocks. Its final output is 256 channels. Both the generator and discriminator use a softplus loss function, which is a smooth approximation of the ReLU. We conducted experiments with varying weights λ for the geometric losses, but observed that our results were unsatisfactory when $\lambda > 0$, which aligns with the findings reported in [2]. Geometric losses are already represented in the HumanML3D ensemble, thus it is justifiable to omit them during training.

5. Results

5.1. Qualitative Results

Our qualitative findings illustrate that our model is capable of most generations that MDM can perform, but with a few discrepancies we should note. In the final seconds of our generations, our results will generally exhibit a floor sliding effect, where after following the text prompt, the plane beneath the figure will shift. This is not the same as the foot contact sliding effect, since by this point the prompt has been completed and the generation is just standing still. This effect is not present in the MDM generations, and we believe that this is due to the fact that the MDM model is trained on a dataset that does not contain this effect. We believe this is a result of some model instability, but at this time are unable to pinpoint the exact cause.

Taking this into consideration, we maintain our conviction that the generations excel in capturing what the text-prompts indicate. We believe that the distribution of HumanML3D is effectively captured by MDM-2-Diffgan, where we observed a favorable range of variability in generations. In the future, we would like to perform a user study in order to obtain less biased interpretations of our results.

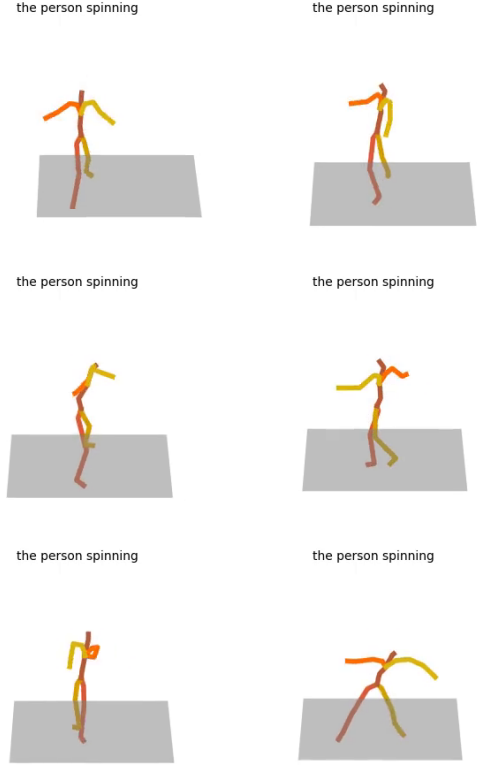


Figure 1. The shows a person in the act of spinning. (Subject to change)

5.2. Quantitative Results

As a quick reminder, let's recall the metrics we use to evaluate our model. We use the R-Precision score, which measures the similarity between the generated motion and the text prompt. FID and Multimodal Distance scores measures the similarity between the generated motion and the real motion. Lastly, Diversity measures the variability between the generated motions.

We compare our results with the results of [2] and other motion generation models, which are shown in Table 1 and 2. We can observe that MDM-2-Diffgan performs fairly well when compared to MDM. While we don't set the state-of-the-art the state of the art in any of the metrics, we are able to achieve a higher R-Precision score than MDM. Also we have a comparable diversity and Multimodality scores, which is a good sign that our model is able to capture the distribution of the HumanML3D dataset. We observe a poor FID score when compared to MDM.

Method	R Precision (top 3) \uparrow	FID \downarrow	Multimodal Dist \downarrow
Real	0.797 \pm .002	0.002 \pm .000	2.974 \pm .008
JL2P	0.486 \pm .002	11.02 \pm .046	5.296 \pm .008
T2M	0.740 \pm .003	1.067 \pm .002	3.340 \pm .008
MDM	0.611 \pm .007	0.544 \pm .044	5.566 \pm .027
M2D	0.698 \pm .007	2.44 \pm .429	6.353 \pm .076

Table 1. MDM-2-Diffgan accomplishes a higher R-Precision score than MDM, but a substantially lower FID score.

Method	Diversity \rightarrow	Multimodality \uparrow
Real	9.503 \pm .065	-
JL2P	7.676 \pm .058	-
T2M	9.188 \pm .002	2.090 \pm .083
MDM	9.559 \pm .086	2.799 \pm .072
M2D	9.416 \pm .057	2.671 \pm .025

Table 2. We observe a similarity of around 0.1 for both metrics between MDM and MDM-2-Diffgan.

Method	1s & 1r	3s & 1r	10s & 3r
	Seconds		
MDM	16.58	18.28	105.14
M2D	0.22	0.31	0.64

Table 3. Our samples generated around 100x faster than those from MDM.

We also perform a speed test, where we measure the time it takes MDM-2-Diffgan to generate motions. We perform three experiments where we generate motions with: 1 sample s and 1 repetition r , 3 samples s and 1 repetition r , and 10 samples s and 3 r . From the results in Table 3, we can observe that it takes MDM considerably longer to generate motions than Motion-2-Diffgan. We can see that MDM takes 16.58 seconds to generate 1 sample and 1 repetition, while M2D takes 0.22 seconds. What is noteworthy though, is how both models scale in as we increase the number of samples and repetitions. MDM takes 105.14 seconds to generate 10 samples and 3 repetitions, whereas M2D only takes 0.64 seconds. This is a significant improvement in time, and shows that MDM-2-Diffgan is able to scale much more effectively than MDM.

6. Additional Applications

Once our hybrid motion diffusion model was complete and generating results, we want to see how we can leverage the motion samples for other applications. One application we wanted to try was person image synthesis. [1]

6.1. Using Motion Samples for Person Image Synthesis

7. Conclusion and Future Works

References

- [1] Ankan Kumar Bhunia et al. Person image synthesis via denoising diffusion model, 2023. [3](#)
- [2] Guy Tevet et al. Human motion diffusion model, 2023. [1](#), [2](#)
- [3] Chuan Guo, Shihao Zou, Xinxin Zuo, Sen Wang, Wei Ji, Xingyu Li, and Li Cheng. Generating diverse and natural 3d human motions from text. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 5152–5161, 2022. [1](#)
- [4] Chuan Guo, Xinxin Zuo, Sen Wang, Shihao Zou, Qingyao Sun, Annan Deng, Minglun Gong, and Li Cheng. Action2motion: Conditioned generation of 3d human motions. In *Proceedings of the 28th ACM International Conference on Multimedia*, pages 2021–2029, 2020. [1](#)
- [5] Naureen Mahmood, Nima Ghorbani, Nikolaus Troje, Gerard Pons-Moll, and Michael Black. Amass: Archive of motion capture as surface shapes. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, page 5442–5451, 2019. [2](#)