

CPLPOS

MANUAL

Date : September 2000
Version : 1.5

Cash Register Module

Contents

1. Introduction to the CASH REGISTER MODULE	3
<i>IBM SURE ONE KEYBOARD</i>	<i>4</i>
<i>FIRICH KEYBOARD.....</i>	<i>5</i>
<i>POSIFLEX KEYBOARD.....</i>	<i>6</i>
<i>YEICOM KEYBOARD</i>	<i>7</i>
2. TURNING THE MACHINE ON	8
3. START SELLING	10
3.1. <i>SELLING WITH DEPARTMENT KEYS</i>	<i>10</i>
3.2. <i>SELLING BY SCANNING BARCODE.....</i>	<i>11</i>
3.3. <i>MULTIPLIER</i>	<i>11</i>
3.4. <i>CORRECTION (void last)</i>	<i>12</i>
3.5. <i>RETURNS.....</i>	<i>12</i>
3.6. <i>PLU SEARCH.....</i>	<i>13</i>
3.7. <i>CLEAR.....</i>	<i>15</i>
3.8. <i>SELLING WITHOUT INITIAL PRICE</i>	<i>16</i>
3.9. <i>SELLING WITH HOTKEYS (ONE ITEM PER KEY)</i>	<i>16</i>
3.10. <i>CANCELLING BILL</i>	<i>16</i>
3.11. <i>PAY-OUT KEY.....</i>	<i>17</i>
3.12. <i>RECEIVE ON ACCOUNT</i>	<i>17</i>
4. DISCOUNTS	19
4.1. <i>DISCOUNT BY AMOUNT.....</i>	<i>19</i>
4.2. <i>DICOUNT BY %.....</i>	<i>19</i>
4.3. <i>ADDITIONAL CHARGE BY %</i>	<i>19</i>
5. CLOSING THE TRANSACTION	20
5.1. <i>CASH PAYMENT.....</i>	<i>20</i>
5.2. <i>CREDIT CARD PAYMENT</i>	<i>21</i>
5.3. <i>CHEQUE PAYMENT</i>	<i>21</i>
5.4. <i>COMBO PAYMENT</i>	<i>21</i>
6. SELLING TO THE CLIENT	22
6.1. <i>SELLING ON CREDIT</i>	<i>22</i>
7. ADDITIONAL FUNCTIONS.....	24
7.1. <i>OPERATOR CHANGE</i>	<i>24</i>
7.2. <i>MULTICURRENCY.....</i>	<i>24</i>
7.3. <i>OPEN DRAWER.....</i>	<i>25</i>
7.4. <i>SYNC KEY</i>	<i>25</i>
7.5. <i>Credit Notes.....</i>	<i>25</i>
8. END OF THE DAY	28
8.1. <i>X-TOTAL Reports.....</i>	<i>28</i>
8.1.1. <i>Daily Sales Report</i>	<i>29</i>
8.1.2. <i>Monthly Sales Report.....</i>	<i>31</i>
8.1.3. <i>Instant Account</i>	<i>32</i>
8.1.4. <i>Other Reports.....</i>	<i>33</i>
8.2. <i>Z-TOTAL.....</i>	<i>33</i>
9. UTILITIES	34
10. SWITCHING OFF.....	35

1. Introduction to the CASH REGISTER MODULE

The CPLPOS cash register module is a sophisticated system, which maintains detailed control of all till operations and simplifies all functions otherwise done manually, with the simplicity of a conventional cash register machine.

A single key press or a combination of programmable keys could do all operations; they are visible by their names on the machine's keyboard.


KEY CONVENTIONS:

FOR CLARITY EVERY KEY WILL BE ENCLOSED IN < > QUOTES FOR THE PURPOSE OF THIS SHORT INSTRUCTION MANUAL. A DIAGRAM OF ALL THE KEYS ON THE KEYBOARD COULD BE FOUND ON THE NEXT PAGE

Note: This version of CPLPOS software supports the following machines: IBM Sure One, Yeicom, Firich and Posiflex. The layouts of their keyboards are following presented.


IBM SURE ONE KEYBOARD

The figure below shows the layout of the POS keyboard. There are also explanations for a few of the keys.

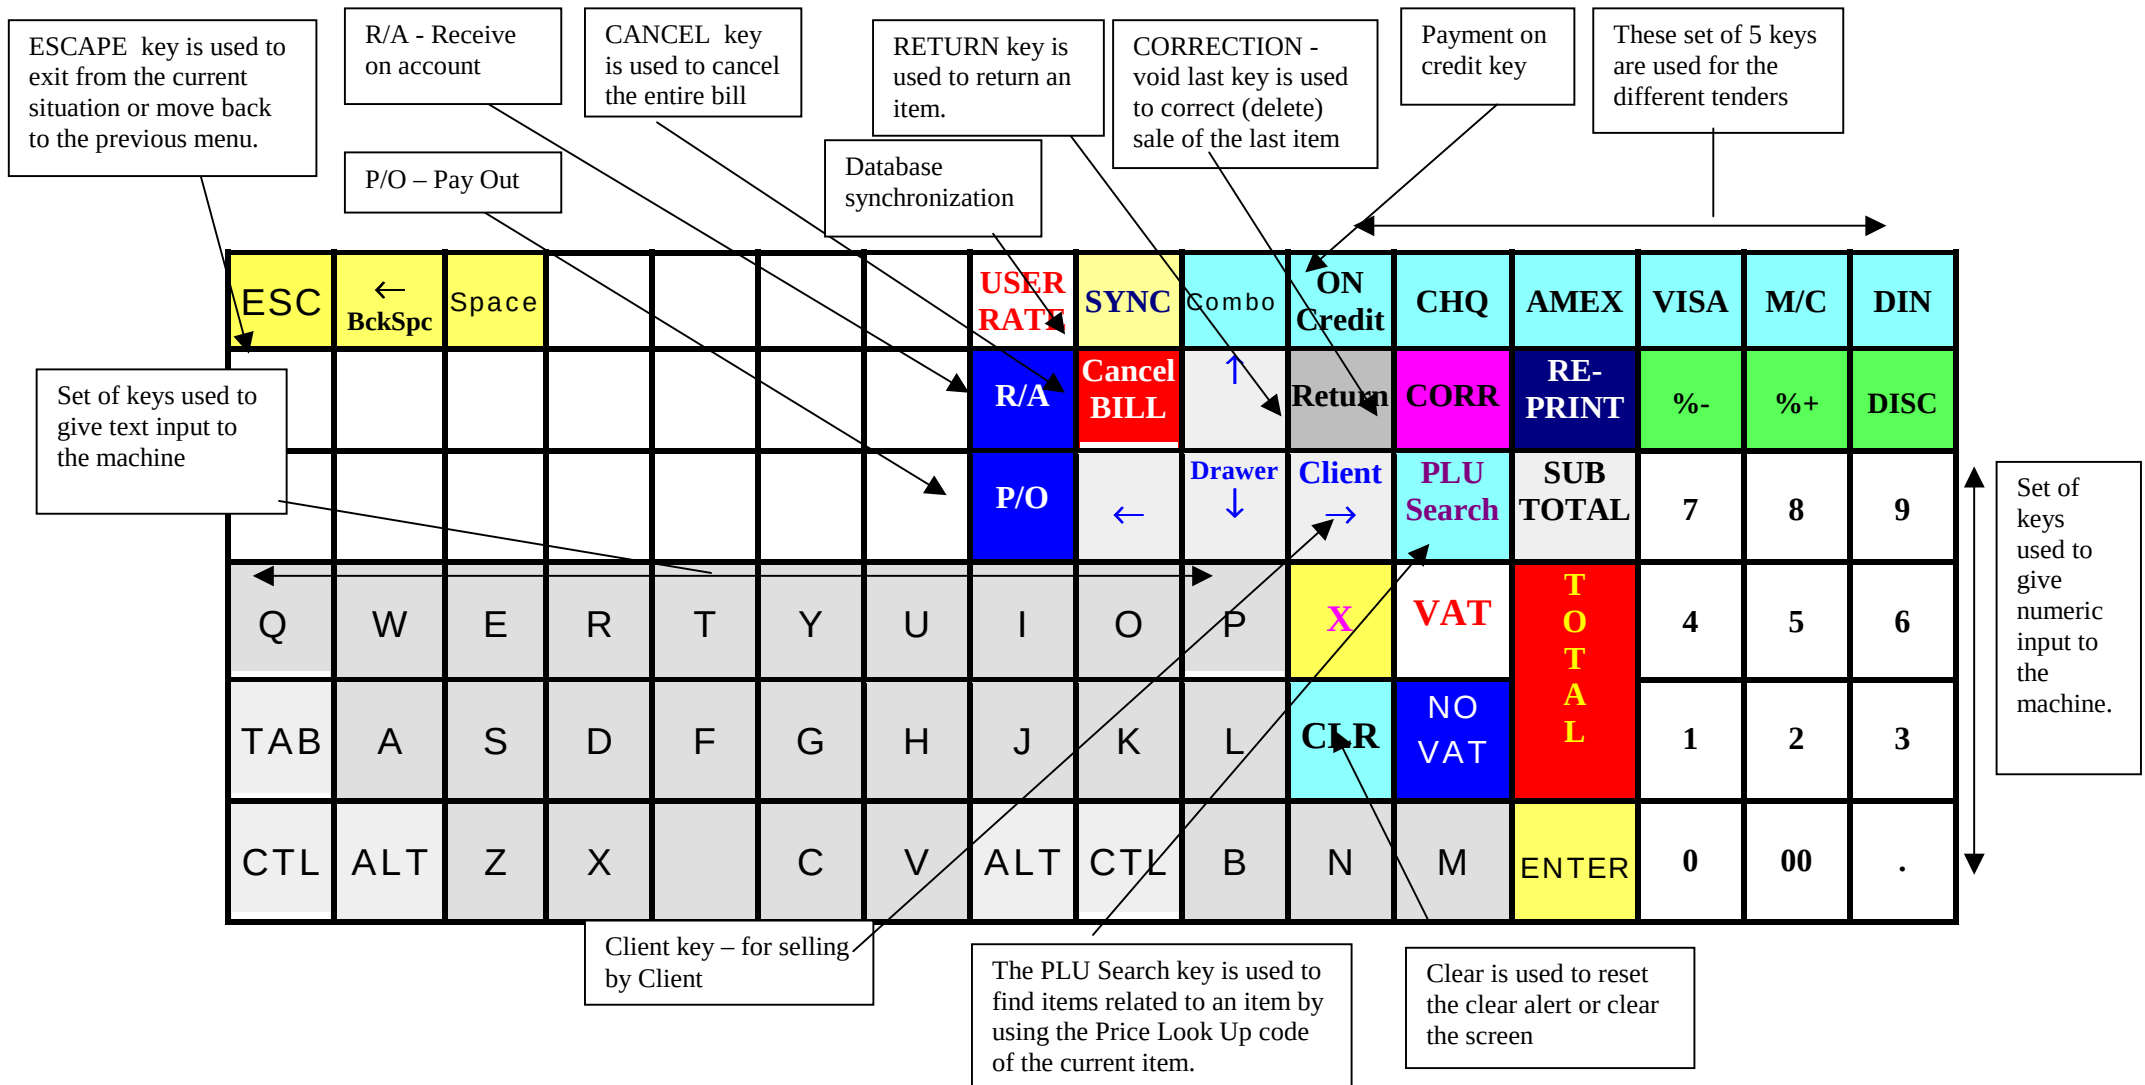


FIRICH KEYBOARD

The figure below shows the layout of the POS keyboard. There are also explanations for a few of the keys.

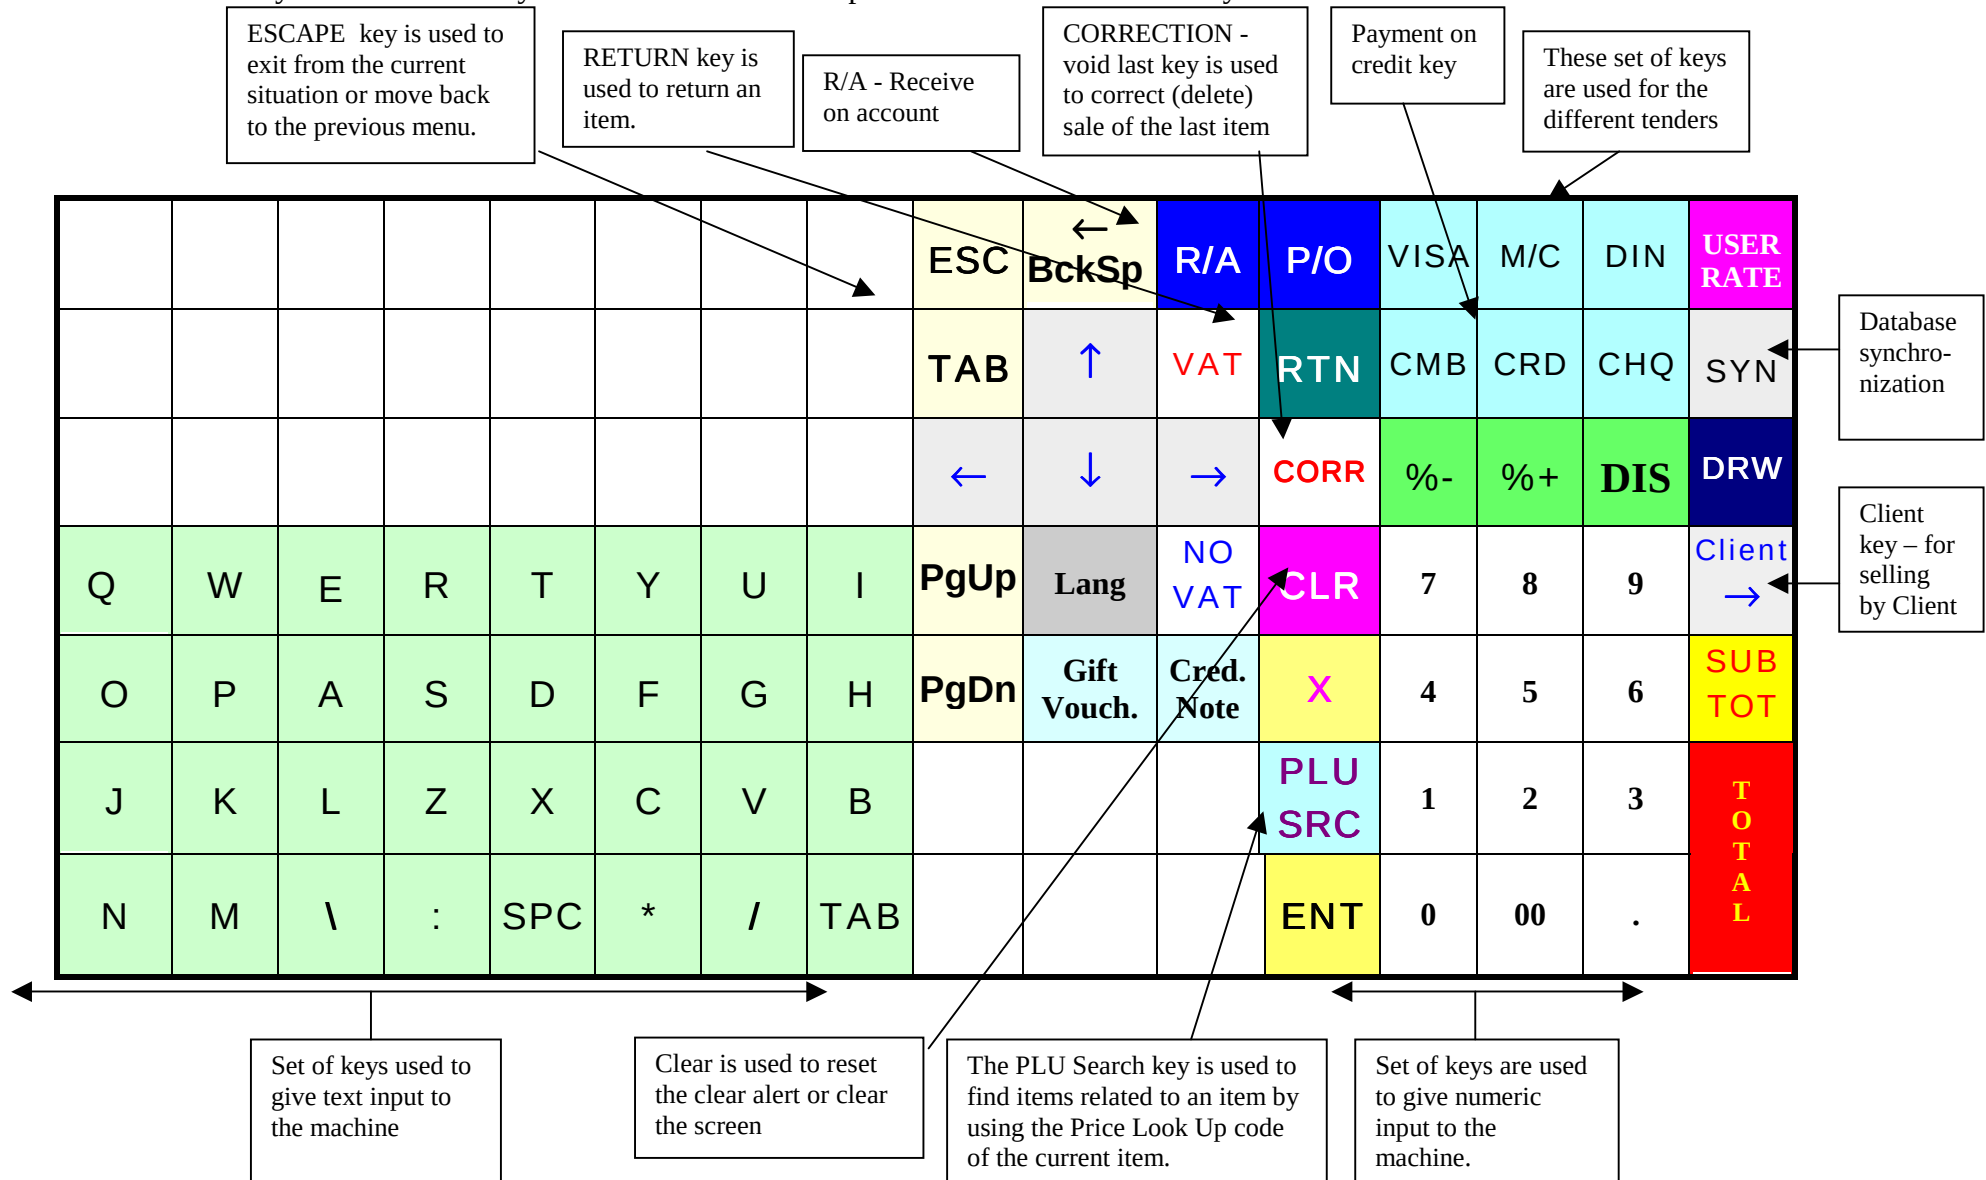


POSIFLEX KEYBOARD

The figure below shows the layout of the POS keyboard. There are also explanations for a few of the keys.

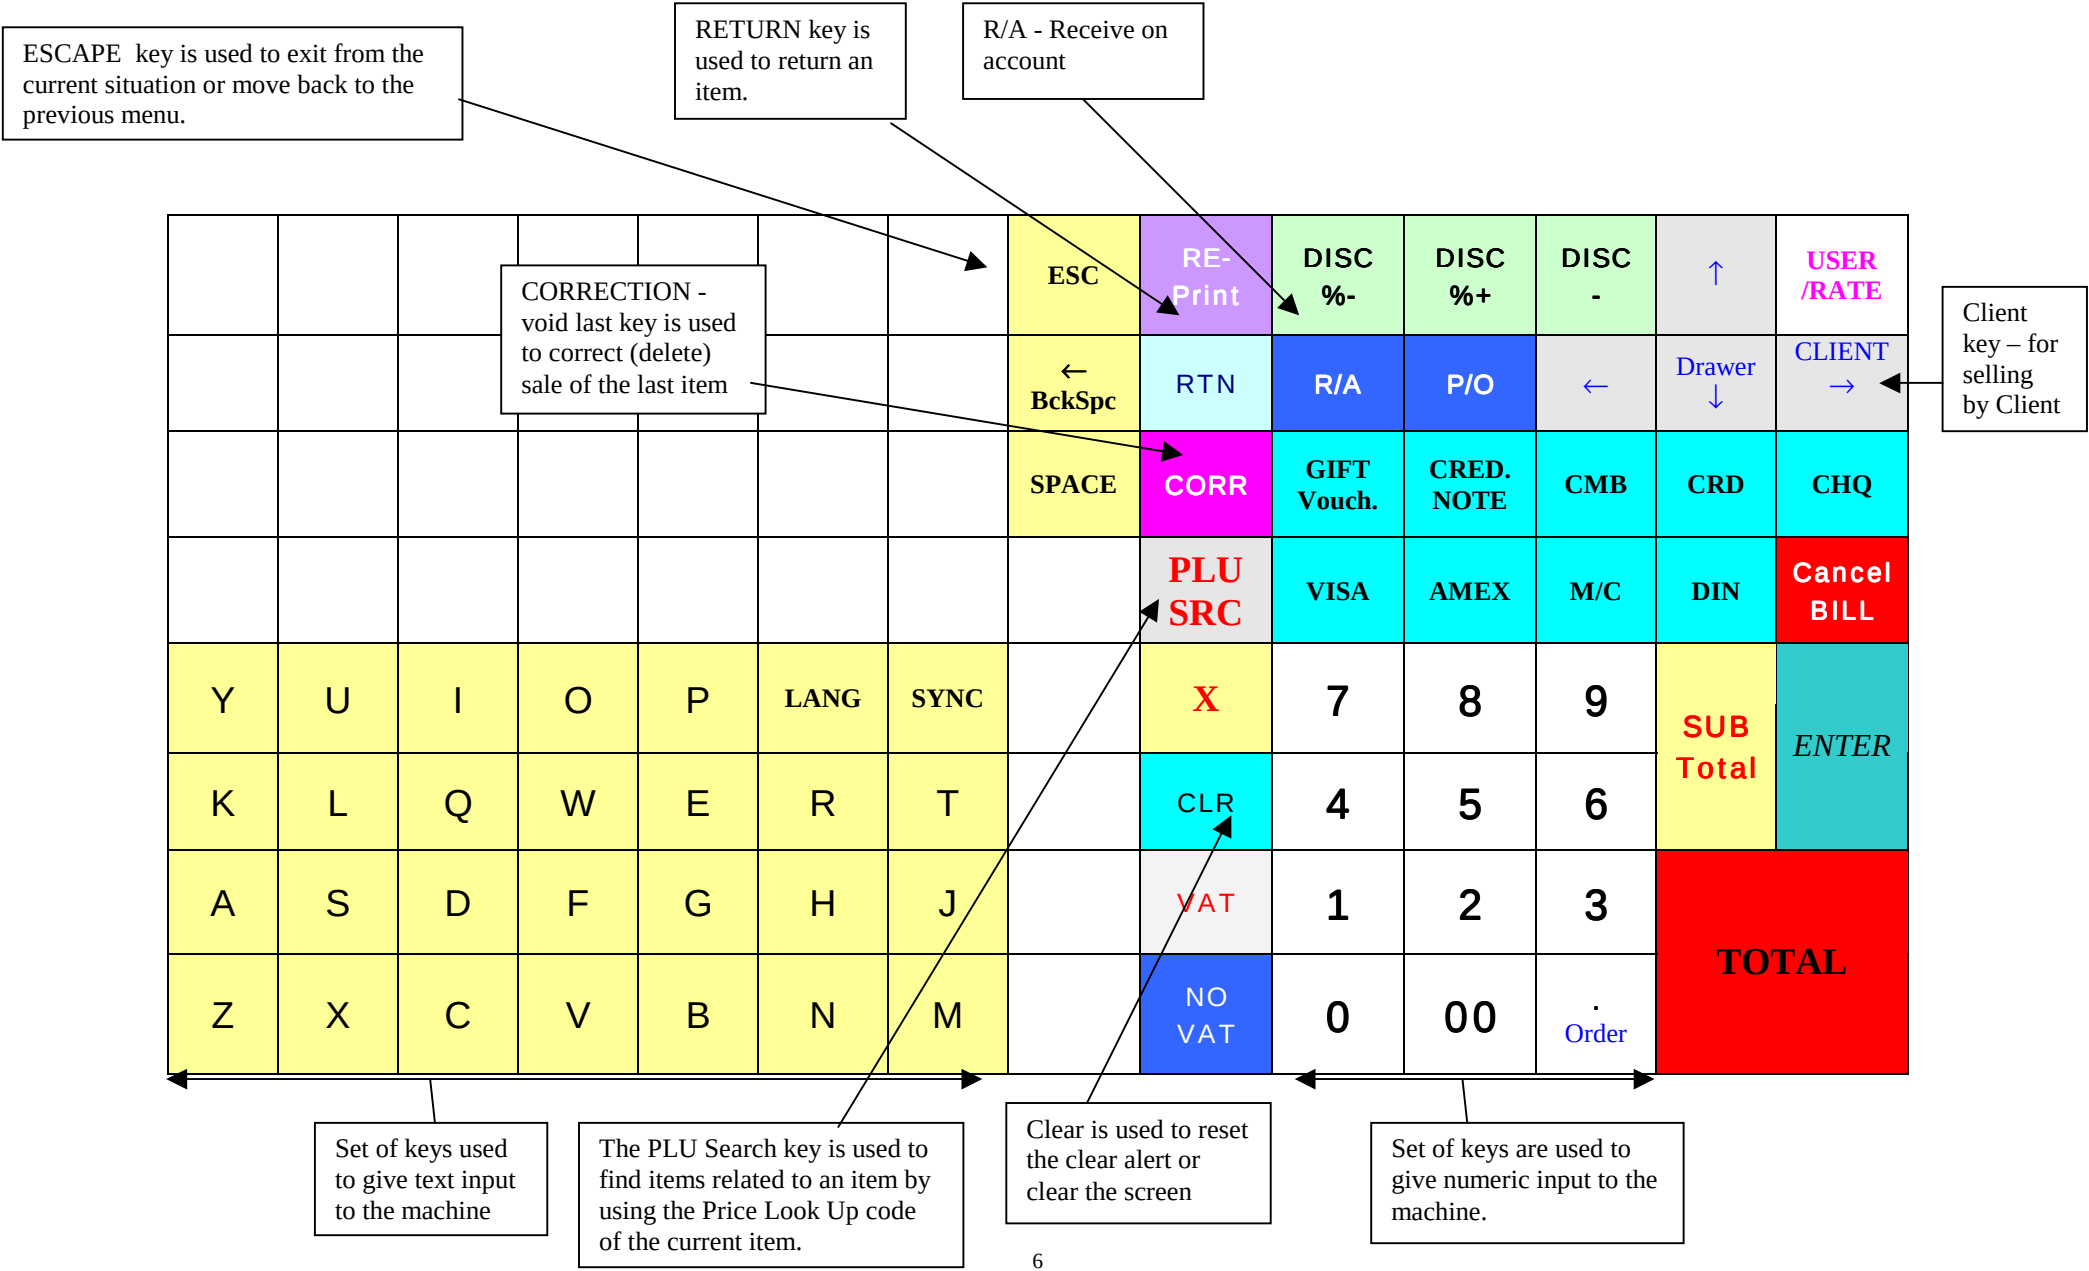

YEICOM KEYBOARD

The figure below shows the layout of the POS keyboard. There are also explanations for a few of the keys.

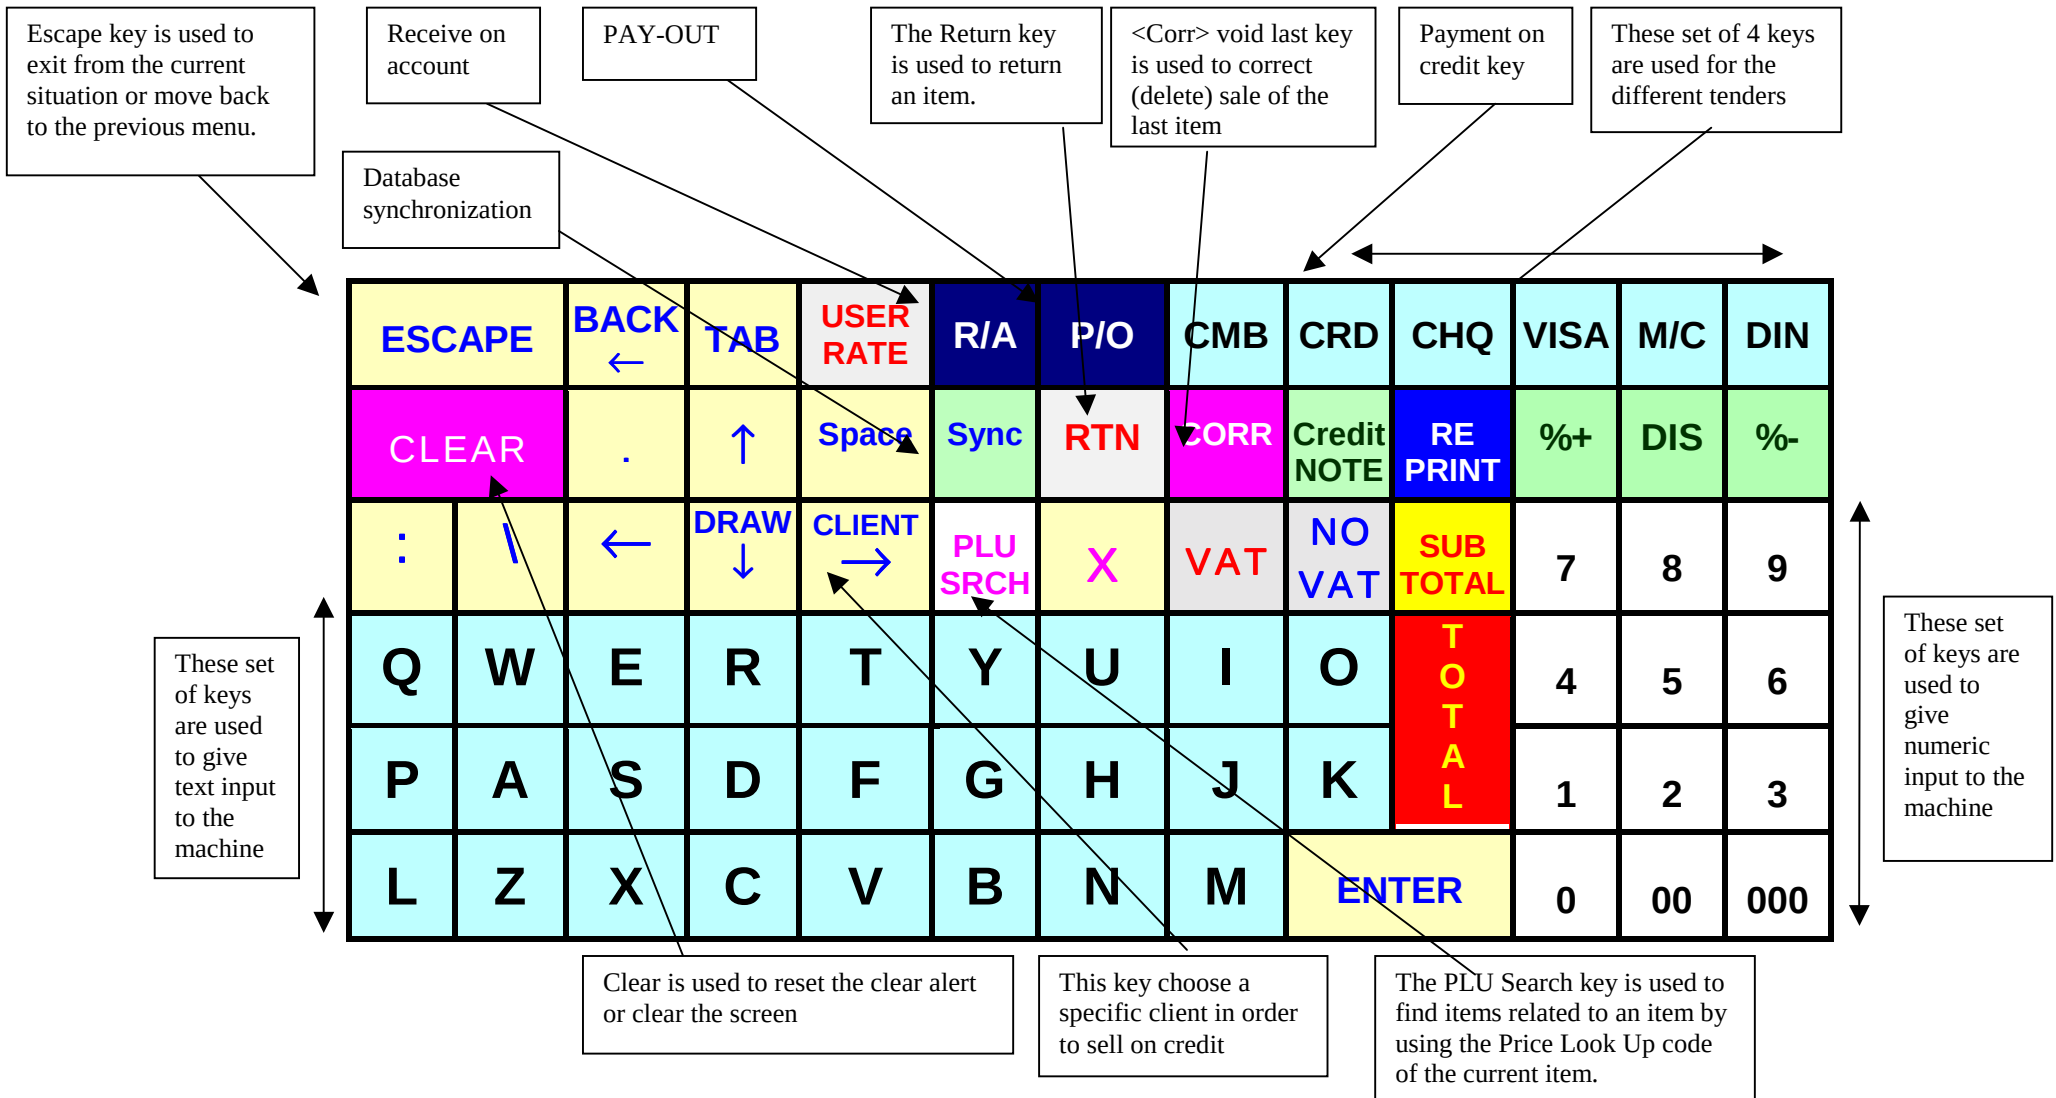

2. TURNING THE MACHINE ON

After the power-on of the POS machine you will be prompted for:

a) *Date:*

- If the DATE is correct then press <ENTER>
- If the DATE is wrong then correct the date by typing over the prompted date. This requires only number entries from the numeric keyboard, separators are added automatically.

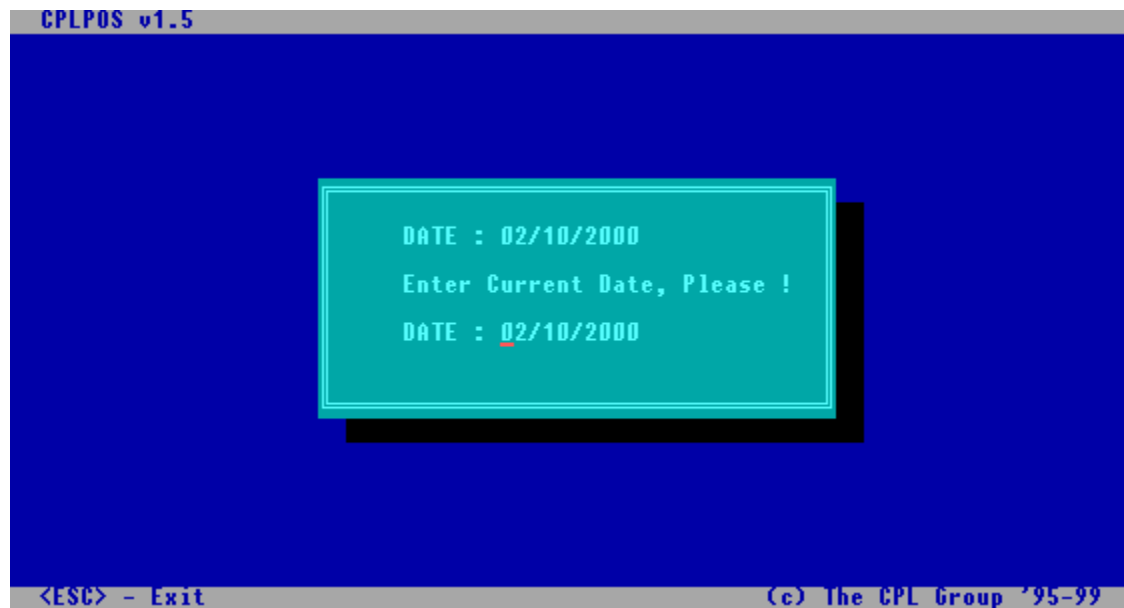


Fig 1

A sample screen of the date input is seen above. On this screen the date is correct so all that needs to be done is to press the <ENTER> key.

b) *Time:*

- If the TIME is correct then press <ENTER>
- If the TIME is wrong then type the correct time, separators are added automatically.

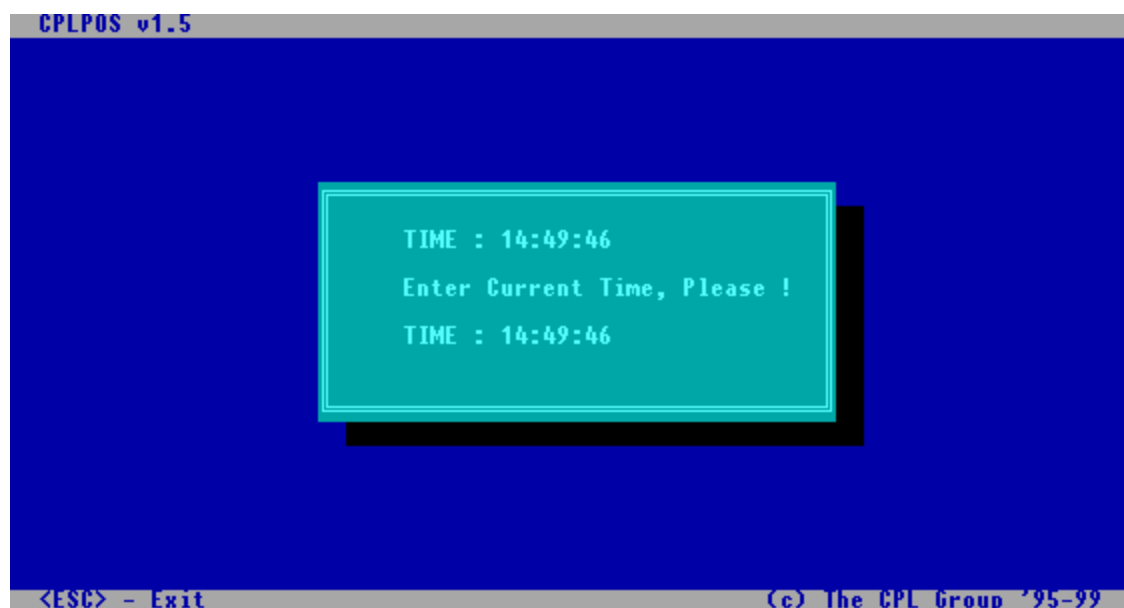


Fig 2

A sample screen for the TIME is seen in Figure 2.

c) Password:

The system will prompt you for a PASSWORD. This is your user id, type it and then again press <ENTER> to confirm. A password screen is shown below.

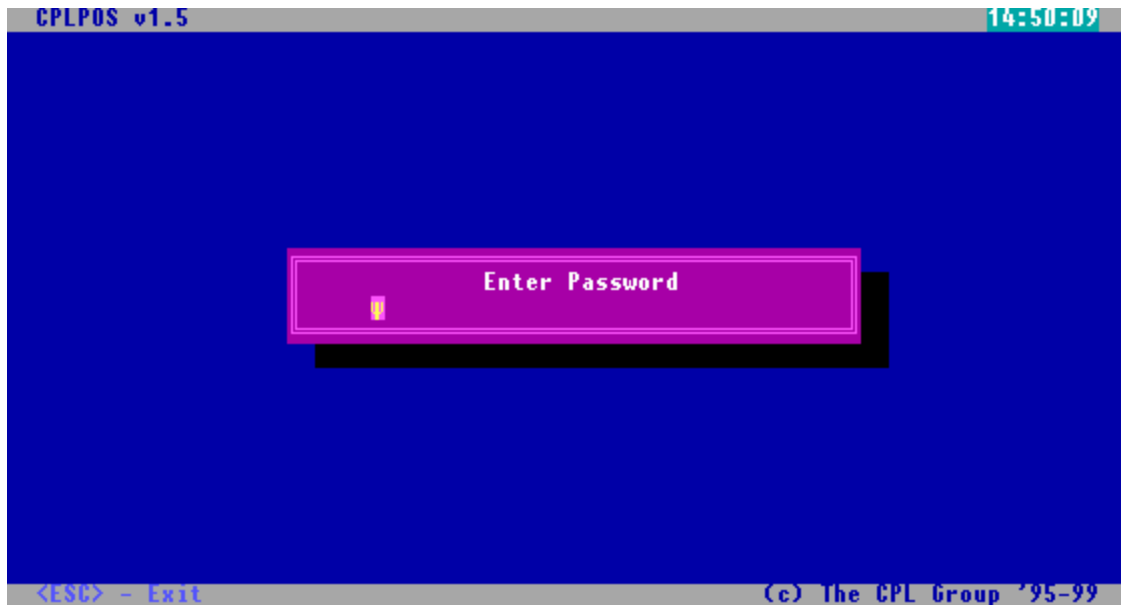


Fig 3

Note:

SPECIAL CARE SHOULD BE TAKEN TO CORRECTLY ENTER THE ABOVE INFORMATION. FAILURE TO DO SO WILL REGISTER SALES UNDER THE WRONG DATE AND TIME. IT IS PREFERABLE THAT THE STORE MANAGER SHOULD SUPERVISE THE PROCEDURE.

In the screen above the choices for returning an item could be seen. Once a choice is selected and confirmed with the <ENTER> key the item has to be scanned. Once this is done the screen shown below is displayed.

This Function serves both situations when we need to return an item from a previous sale or the current sale as a correction, with of course the appropriate reason (e.g. damaged or sold by error). The system then gives a negative amount for the sale and the transaction can continue as normal.

DATE : 02/10/2000 USER : 1 TIME :

NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT
1	RTH	5010006100234	AQUAFR. MOUTH WAS H 300ML	15	1.45	1	1.45 T

RTH MDSE 0

Client No.: VAT : -0.11
 Name: Total : -1.45
 Tel: Amount:
 Purchase Amt: Last Purchase: Change :

Fig 9

Note: If you wish to return multiple quantity of the same item, press <X> Multiplication key and then <RET> , Return key followed by <Enter> and scanning the Item.

3.6. PLU SEARCH

This function will display details of the items needed (e.g. Price, QTY in stock as well as other items from the same family (e.g. a particular model skirt with different colour and sizes). Searching can be done: By PLU number, By Description or by Style.

After pressing the <PLU SEARCH> the following screen will appear.

DATE : 02/10/2000 USER : 1 TIME : 14:56:43

NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT
PLU_NO : >>PRESS [PLU] TO CONTINUE ..							

0

Client No.: VAT:
 Name: Total:
 Tel: Amount:
 Purchase Amt: Last Purchase: Change :

Fig 10

It will ask for a PLU at first (as seen above), after scanning or pressing arrow down a list of the same family will be displayed on the screen. This result is shown below in Figure 11.

DATE : 02/10/2000 USER : 1 TIME :

NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT
PCMAS							
PLU_NO	DES	DPT	PRICE	TX	QTY		
5201314012009	AFROSO ANTIBACT 750ML	14	0.92 0		-7.00		
5290860000011	K/TOWEL TERRY/7T6 MEDIUM ASSOR	38	2.00 0		0.00		
5290860000028	K/TOWEL TERRY/7T23-1 BIG ASSOR	38	2.70 0		-1.00		
5290860000035	K/TOWEL PRINTED/STRAWBERRIES R	38	1.80 0		-8.00		
5290860000066	K/TOWELS YARN DYES CHECK/SIMOL	38	2.00 0		0.00		
5000137621906	TEA TIME ASS.BISCUITS 400GR	04	1.30 1		0.00		
5000204889949	GLADE CANDLE SPRING POT POURRI	14	1.99 0		-10.00		
5201089410895	CAREF. INTIMATE WASH 200ML	11	1.85 0		-13.00		
5201004040305	RONDO VANILIA 250GR	04	0.80 1		-12.00		
5201004040312	RONDO CHOC.250 GR	04	0.80 1		-11.00		
0001234002808	PRICKLY HEAT POWDER 200G	25	2.75 0		0.00		
5000209147525	PLAX ORIG.FLAV.+20%	15	1.95 0		0.00		
5000209184513	COLG.TARTAR CONTROL DISP.100ML	15	1.15 0		0.00		
5000209195519	COLG.TRIP/COOL GEL 100ML	15	0.79 0		0.00		
50207909	REACH WAXED D/TAPE 25M.	15	0.95 0		0.00		
50209019	PALM.SH/CREAM SENS.SKIN 250ML	09	1.06 0		0.00		
50209033	PALM.SH/CREAM DRY SKIN 250ML	09	1.65 0		0.00		

Fig 11

If inquiry by description is needed, once the PLU prompt appears after the <PLU SEARCH> key is pressed (as seen with figure 10) press <ENTER> and a search by description will be initiated. The description search screen could be seen below.

After a partial description from the keyboard is entered and the <ENTER> key is pressed items are showed sorted by Description. A sample search is shown for a supermarket, the keyword used is 'chocolate' and this brings up a resulting screen with all items containing the description mentioned.

The result of the search according to the above search is shown below:

DATE : 02/10/2000 USER : 1 TIME : 15:00:33

NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT

PLU_NO : MAGGI

>>PRESS [PLU] TO CONTINUE ..

0

Client No.:	VAT:
Name:	Total:
Tel:	Amount:
Purchase Amt:	Change :
Last Purchase:	

Fig 12

DATE : 02/10/2000 USER : 1 TIME :

NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT
PCMAS							
PLU_NO		DES		DPT	PRICE	TX	QTY
8991389010228		TETRADIO PLASTIKO 80sheets		42	0.32	0	10
8991389622148		ENVELOPE A/MAIL 114x162 x50		42	0.50	0	749
8991389622148		ENVELOPE A/MAIL 114x162 x50		42	0.49	0	250
8991389622162		ENVELOPE WHITE 114X162 x50		42	0.50	0	748
8991389622162		ENVELOPE WHITE 114X162 x50		42	0.49	0	250
8992696403130		MAGGI 2'NOODLES CHICKEN 85gr		03	0.19	1	15
8992696403147		MAGGI 2'NOODLES CURRY 85gr		03	0.19	1	0
8992696403154		MAGGI 2'NOODLES PRAWN 85gr		03	0.19	1	0
8992696404069		MAGGI 2'NOODLES CHEESE 85gr		03	0.19	1	0
8992696404076		MAGGI 2'NOODLES PIZZA 85gr		03	0.19	1	-6
8992696404083		MAGGI 2'NOODLES VEGET. 85gr		03	0.19	1	-2
8998889064607		LORDOS PAGOURI KIDS MIKRO		49	1.17	0	14
8998889065604		LORDOS PAGOURI KIDS 656 MEGALO		49	1.43	0	0
8999979002097		LIVINA BOURTSA MPIMPEROU		26	0.87	0	4
8999979002509		TS PAGOURI J-3 3L		49	1.98	0	4
8999979002547		TS PAGOURI 2.7LT		49	1.98	0	3
8999979010962		LION STAR T/BRUSH STANT		49	1.70	0	6

Fig 13

3.7. CLEAR

If a wrong key is press or an illegal operation is performed the system will pop up a clear screen. Press the <CLEAR> key to cancel the wrong keying. Clear is also used to clear the screen. The clear screen alert could be seen below.

DATE : 02/10/2000 USER : 1 TIME : 15:01:51

NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT
CLEAR							

PRESS <Clear> TO CONTINUE

Client No.:		VAT:	
Name:		Total:	
Tel:		Amount:	
Purchase Amt:	Last Purchase:	Change :	

Fig 14

3.8. SELLING WITHOUT INITIAL PRICE

The selling could be done even if the price of the product is ZERO. This feature allows fast data entry – “By selling” The system is loaded with items already existing in the shop without selling price Price=0). The cashier will face a price-input screen once the item is scanned. After the price is entered it does not have to be re-entered again.

The price has to be entered with cents and no decimal point should be included. This is seen in the figure below.

After entering the price either the <VAT> or <NO VAT> key are pressed to indicate the tax status of the price. This ensures that without any extra personnel and effort the correct selling prices for all items are inputted.

DATE : 02/10/2000 USER : 1 TIME : 15:02:53

NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT

PRICE:

0

Client No.: UAT:
 Name: Total:
 Tel: Amount:
 Purchase Amt: Last Purchase: Change :

Fig 15

3.9. SELLING WITH HOTKEYS (ONE ITEM PER KEY)

For frequently selling products it is possible to have a key on the keyboard representing that product. So, instead of scanning the item the hotkey could be pressed and the item is sold. The hotkey is pressed and the item is sold for that hotkey.

3.10. CANCELLING BILL

The CANCEL key is used to cancel the bill during the process of selling. The normal use of this key involves pressing it during the selling process. Once it is pressed Cancel has to be Confirmed 1- Yes, 2 – No. The screen is cleared of the current bill and on the receipt is printed CANCEL.

3.11. PAY-OUT KEY

If for some reason cash is being taken out of the cash box the amount should be entered on the selling screen and then the payout button should be pressed. This payout button is denoted by <P/O> on the keyboard of the cash register. After the amount is entered and the <P/O> key is pressed the screen shown below is presented and the transaction could continue after the <TOTAL> key is pressed.

NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT
1	PO						10.00

PO : 10.00

Client No.: VAT : 0.00
 Name: Total : 10.00
 Tel: Amount:
 Purchase Amt: Last Purchase: Change :

Fig 16

3.12. RECEIVE ON ACCOUNT

When cash is being put into the cash box the amount has to be typed on the selling screen and then the Receive On Account <R/A> key should be pressed. The Received On Account key could be seen on the keyboard as the <R/A> key. This could be used with the client key for settling credit accounts. To do this press the <CLIENT> key and enter the information of the client, this could be seen on the screen below.

NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT

Input Client#
CLIENT :

0

Client No.: VAT:
 Name: Total:
 Tel: Amount:
 Purchase Amt: Last Purchase: Change :

Fig

After the client information the screen appears as below which shows the client information.

NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT
CLIENT 11			MR ZACHARIDES TA				

Client : ZACHARIDES TAKIS

Total Points : 0.0

Credit Limit : 10.00

Credit amount: 0.00

Client No.: 11 VAT:

Name: MR ZACHARIDES TAKIS Total:

Tel: Amount:

Purchase Amt: 0.00 Last Purchase: 02/10/2000 Change :

Fig 18

Thus the Receive On Account key <R/A> could be used to settle part or all of the account of a client. As mentioned before, this is done by entering the amount and then pressing the <R/A> key. A screen showing the result is shown below. Normal selling continues after the <TOTAL> key has been pressed to finalize the Receive On Account function.

NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT
CLIENT 11			ZACHARIDES TAKI				
1 R/A							5.00

R/A : 5.00

Client No.: 11 VAT : 0.00

Name: ZACHARIDES TAKIS Total : 5.00

Tel: 356568 Amount:

Purchase Amt: 0.00 Last Purchase: 02/10/2000 Change :

Fig 19

Note: If the Receive On Account key <R/A> is used to settle the account of a client only this operation should be performed on the selling screen.

4. DISCOUNTS

4.1. DISCOUNT BY AMOUNT

Discount can be done on item (line discount) or for the group of items or whole bill (overall discount).

Line Discount is applied right after selling item. The operator should type the discounted amount following by press of <**DISC**> key. The line with discounted amount will be shown.

Overall discount can be applied after Sub-total has been pressed <**SUBTOT**>. The discounted amount is typed followed by pressing <**DISC**> key.

Note: In case when of overall discount is applied the line discounts for each item has been calculated.

4.2. DISCOUNT BY %

The usage is the same like for Discount by Amount. It can be line discount or overall (after Sub-total). The difference is in the number typed before pressing <%->. This number represents percentage to be applied on item price or Sub-total amount.

4.3. ADDITIONAL CHARGE BY %

If needed in some situation price of the item can be increased by specific %. For this purpose the key <%+> can be used in the same manner as <%-> key.

5. CLOSING THE TRANSACTION

The system accepts payments by **CASH, VISA, M/C, DINERS, CHEQUES** or **ON CREDIT**. Once the transaction is complete the operator should press <SUB> key - Subtotal. The Amount is shown to the customer on the Customer display and depending of the way of payment transaction can be closed with one of the tendering buttons.

DATE : 02/10/2000		USER : 1		TIME :			
NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT
1		8716500371008	OLD SPICE A/SHAV E 150ML	12	4.45	1	4.45 T
2	SUB						4.45
SUB :							4.45
Client No.:				VAT :		0.33	
Name:				Total :		4.45	
Tel:				Amount:			
Purchase Amt:		Last Purchase:		Change :			

Fig 20

5.1. CASH PAYMENT

Lets say the Subtotal is £4.45 the customer is paying cash. The operator receives the customers money and enters it in the system e.g. £5.00. Then <TOTAL> key is pressed to close the transaction, reporting to the customer LCD and the operator £0.55 in Change. This will enable the operator to give back change with out extra manual calculations. See Figure 21

DATE : 02/10/2000		USER : 1		TIME :			
NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT
1		8716500371008	OLD SPICE A/SHAV E 150ML	12	4.45	1	4.45 T
2	SUB						4.45
3	AMOUNT						4.45
CHANGE :							0.55
Client No.:				VAT:		0.33	
Name:				Total:		4.45	
Tel:				Amount:		5.00	
Purchase Amt:		Last Purchase:		Change :		0.55	

Fig 21

5.2. CREDIT CARD PAYMENT

Once the <SUB> key is pressed the operator has to verify through the Credit card machine the amount to be paid. Once this is done any of the Credit card keys can be pressed to close the transaction. (<VISA>, <M/C> or <DINERS>). This will record to the system payment received by credit card, and the signed slip by the customer (original) has to be placed in the cash box.

5.3. CHEQUE PAYMENT

After or before the <SUB> key is pressed the operator can close the transaction with check payments. When the <CHQ> key is pressed the transaction is closed with the actual amount of the subtotal assuming that the check is written to the exact amount. (Remember the customer cheques have to be approved by the management)

If the check is a “travellers cheque” then after the <SUB> key is pressed, the operator must enter the amount of the check (just like receiving cash) and then press <TOTAL> key. This will close the transaction and indicate at the same time the change.

5.4. COMBO PAYMENT

In the event that the client wants to pay with both a credit card and Cash then the <SUB> key is pressed as usual and then the <COMBO> key. When the combo key is pressed a window appears with the type of payments and the amount of each type of payment. The amount to be paid by credit card must be entered with decimal separator (validation for the amount must be done just like the normal credit card procedure). A combo payment selection screen is shown in Figure 22:

NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT
1		0001234002808	PR DE				5 T
2		011120009354	UP 00				0 T
3	SUB						5

TOTAL Amount : 5.65

Gift Voucher # : [REDACTED]

Cash : 0.65

Visa : 5.00

M/C : 0.00

Diners : 0.00

AMEX : 0.00

Cheque : 0.00

Credit (On ACC) : 0.00

[0.00]

Client No.: [REDACTED]
 Name: [REDACTED]
 Tel: [REDACTED]
 Purchase Amt: [REDACTED] Last Purchase: [REDACTED] Amount: [REDACTED]
 Change : [REDACTED]

Fig 22

6. SELLING TO THE CLIENT

If the Customer database is created every bill can be personalize. Beforehand sell is important to press **<CLIENT>** key followed by pressing **<↓>** and typing beginning of client Last name (searching by contest), If client number is known or client has a card then typing Client number is enough to point to the specific client.

On the Screen is shown Client Name and Number and selling can begin.

Note: All transactions are kept together with client no, so it is possible to make reports what exactly client was purchasing in the selected period of time.

NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT
CLIENT 11			MR ZACHARIDES TA				

Client : ZACHARIDES TAKIS
 Total Points : 0.0
 Credit Limit : 10.00
 Credit amount: 3.30

Client No.: 11 VAT:
 Name: MR ZACHARIDES TAKIS Total:
 Tel: Amount:
 Purchase Amt: 3.30 Last Purchase: 02/10/2000 Change: 0

Fig 23

6.1. SELLING ON CREDIT

If transaction is closed pressing the key **<CREDIT>** all the amount will be transferred on credit account. If no customer is selected at the beginning of selling it will be general credit account. In case customer is selected it will be debited customer account.

After pressing a key **<CREDIT>** transaction is still not closed. If all the amount will really debited account that **<TOTAL>** key needs to be pressed in order to close the transaction.

If there is partial payment then amount of the payment has to be keyed followed by pressing key **<R/A>** Receive on Account. And then for closing again **<TOTAL>** key needs to be pressed.

DATE : 02/10/2000			USER : 1		TIME : 15:27:35		
NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT
1	CLIENT	11	MR ZACHARIDES TA				
		0000050232543	PINK SALMON 105G	07	0.89	1	0.89 T
2		0000023022751	LEONE 25 T/BAGS	08	0.55	1	0.55
3	SUB						1.44
4	CREDIT						1.44
Client No.: 11				VAT :		0.07	
Name: MR ZACHARIDES TAKIS				Total :		1.44	
Tel:				Amount:			
Purchase Amt: 3.30		Last Purchase: 02/10/2000		Change :			

Fig 24

7. ADDITIONAL FUNCTIONS

7.1. OPERATOR CHANGE

If the specific operator (cashier) is currently on a specific POS system will be replaced, he/she must hit the <USER/RATE> key . This will prompt for password and then either the same operator will be able to continue selling or another one with an authorized ID (password). This provides security and also monitors all activity done by individual cashier. The operator change screen could be seen below.

DATE : 02/10/2000 USER : 1 TIME : 15:28:21

NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT
Input User Password Password: _							

0

Client No.:
Name:
Tel:
Purchase Amt:

Last Purchase:

UAT:
Total:
Amount:
Change:

Fig 25

7.2. MULTICURRENCY

In case when client wants to pay in foreign currency and this is acceptable method of payment it is possible after pressing key <SUB-TOTAL> to view calculated amount in foreign currency. The total amount after closing the transaction will be shown and kept in local currency.

Note: In order to get correct amount represented in foreign currency proper set-up beforehand needs to be done. (Main Menu – Configuration – Currency exchange Rate)

DATE : 02/10/2000			USER : 1		TIME : 15:33:58		
NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT
1		0000050232031	TUNA STEAKS IN B RINE 100G	07	2.30	1	2.30 T
2		000005023248	EXCHANGE RATE		1.20	1	1.20
3	SUB		1. GBP 1.05 2. DEM 3.34 3. USD 1.56 [ESC] QUIT				3.50
1.GBP 2.DEM 3.USD							
Client No.:				VAT :		0.17	
Name:				Total :		3.50	
Tel:				Amount:			
Purchase Amt:				Last Purchase:		Change :	

Fig 26

7.3. OPEN DRAWER

If during selling, in cash register module drawer needs to be open without using a key, pressing key <DRAW ↓> will open the drawer.

7.4. SYNC KEY

<SYNC> key is used when one or more POS machines are connected to the server. This is a way to synchronize data between server and POS machine on-demand.

7.5. Credit Notes

This feature facilitates a method for merchandise returning. When the customer comes back with the merchandise to be returned, instead of giving his money back, you will give him a credit note for the same value. This note could be available only for a limited period of time, and can be used only in your shop. This means that practically using this method, you will never give money back, but you will allow customers to choose another merchandise in exchange.

How to do? When the customer comes with the merchandise to be returned, you proceed as for a normal return, by pressing <RTN> key, and after that selecting a return reason, and scanning the barcode or entering manually the item's code. After

that you will press the **<CRED NOTE>** key, and a small window as in next picture, will open and will allow you to fill in details.

DATE : 02/10/2000 USER : 1 TIME : 16:59:27

NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT
1	RTN	000259	CHRISTIS DIET HA LOUMI	22	3.50	1	3.50

RTN MDSE 0

Client No.: VAT : 0.00
 Name: Total : -3.50
 Tel: Amount:
 Purchase Amt: Last Purchase: Change :

Fig 27

The credit note number is generated automatically to be unique. You can fill in the name and telephone of the customer, and a remark for yourself. After completing this, the windows will disappear, and the screen will look like in the next picture.

DATE : 02/10/2000 USER : 1 TIME :

NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT
1	RTN	000259	CHRISTIS DIET HA LOUMI	22	3.50	1	3.50
2			#1000005	97	3.50	1	3.50 T

DPT 97 #1000005 3.50

Client No.: VAT : 0.26
 Name: Total : 0.00
 Tel: Amount:
 Purchase Amt: Last Purchase: Change :

Fig 28

What you saw until now, is the “issue” of a credit note. Now we have to discuss, how this note will be used later on, when the client will come to take another item in exchange. In this case, you will proceed as for normal selling process. After you have scanned all the items selected by the customer, you press the **<SUB-TOTAL>** key so you will see the total amount to be paid, and press the **<CREDIT NOTE>** key. In this moment a small window will open, asking you for the number of the credit note, as you can see in the next picture. After you fill in the correct credit note number another window showing credit note details will appear, and you will see a new line with credit note description, and the total value is decreased with the amount of the credit note presented.

In the picture below, you can see that the customer bought items for total value of CYP3.50, and presented a credit note of CYP3.50.

DATE : 02/10/2000 USER : 1 TIME : 17:01:19

NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT
1		0000050232482	RED SALMON 105GR	07	1.20	1	1.20
2		0000050232031	TUNA STEAKS IN B	07	2.30	1	2.30 T
3	SUB						3.50

Credit Note
 Serial #: 1000005

0

Client No.:		VAT :	0.17
Name:		Total :	3.50
Tel:		Amount:	
Purchase Amt:	Last Purchase:	Change :	

Fig 29

DATE : 02/10/2000 USER : 1 TIME : 17:01:26

NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT
1		0000050232482	RED SALMON 105GR	07	1.20	1	1.20
2		0000050232031	TUNA STEAKS IN B RINE 100G	07	2.30	1	2.30 T
3	SUB						3.50

Credit Note - 1000005 Amount: 3.50
 Name : ANDREAS PORANNIS
 Phone #: 356589

0

Client No.:		VAT :	0.17
Name:		Total :	3.50
Tel:		Amount:	
Purchase Amt:	Last Purchase:	Change :	

Fig 30

DATE : 02/10/2000 USER : 1 TIME :

NO.	STATUS	PLU	DESCRIPTION	DPT	PRICE	Q'TY	AMT
2		0000050232031	TUNA STEAKS IN B RINE 100G	07	2.30	1	2.30 T
3	SUB						3.50
4	RTN		#1000005	97	3.50	1	3.50 T
5	AMOUNT						0.00

TOTAL : 0.00

Client No.:		VAT:	-0.09
Name:		Total:	0.00
Tel:		Amount :	0.00
Purchase Amt:	Last Purchase:	Change :	0.00

Fig 31

8. END OF THE DAY

Once the day is over the latest cashier must press <ESC> twice to exit the system completely. At that time the POS will be at C:\CPLPOS> on the screen. Then the manager must type **CPLPOS** and press <ENTER> key. This will re-enter into the system just like Power On in the morning, but must enter the manager password once prompted.



Fig 32

Once the Date, Time and Password are entered the main menu screen is shown as above.

8.1. X-TOTAL Reports

This will enable the manager to produce the X-total reports. The X-total reports are accessed by pressing <2> on the main menu (seen above) and then choosing one of the following choices that could be seen on Figure 24 below.



Fig 33

8.1.1. Daily Sales Report

This is a report to show the day's sales in various different ways. Once the Daily Sales Report is selected from the menu, which was discussed on the previous page, the following menu appears shown below. This menu allows the manager to choose the specific type of Daily Sales Report needed.



Fig 34

The choices are:

1. Daily totals
2. Daily Sales Report by Invoice number
3. Daily Sales Report by Department
4. Daily Sales Report by Item number.

After one of these choices is made the Report Set-up Screen appears which gives the user the choice of media for the report. This could be sending the report to the screen, an assortment of printers or a file.



Fig 35

At this stage the media type should be selected (from 1 to 4) and then the range of the POS numbers is entered. Each POS number should be followed by the <ENTER> key. Once the Report Set-up Screen is completed the report is presented. The following four figures show the different type of reports.

Daily Sales report - Daily Totals

++ Daily Sales Report ++	
02/10/2000	17:15:03
POS #: POS	
=====	
TOTALS	

Net Amt :	46.60

CASH :	31.09
CHEQUE :	0.85
CREDIT :	14.78
VISA :	3.00
AMEX :	0.00
M/C :	0.00
DINERS :	0.00

Disc % + :	0
:	0.00

Fig 36

Daily Sales report - By Invoice number

++ Daily Sales ++		
By Invoice No		
02/10/2000	17:15:32	
POS #: POS		
Invoice #	Amount	VAT
698	1.11	0.00
699	0.85	0.06
701	1.23	0.00
705	1.23	0.09
706	1.23	0.09
707	1.23	0.09
709	1.23	0.09
711	2.46	0.18
712	2.46	0.18
713	2.46	0.18
714	1.23	0.09
715	12.34	0.91

Fig 37

Daily Sales Report - By Department

PREVIEW 17:15:55

+++ Detail Daily Sales +++
By Department

02/10/2000

POS #: POS

Dpt	Description	QTY	Amount
01	BREAD	2	0.85
02	DRINKS	1	0.55
03	DAIRY PRODUCT	1	1.30
06	SNACKS	1	0.50
08	CHOCOLATE	1	4.95
09		1	0.85
11	ALLANDIKA FRO	1	1.65
12	PAKSIMADIA	1	0.80
13	DIAFORA NO VA	1	1.11
14	DIAFORA WITH	4	4.92
15	ICE CREAM	1	1.00
17	TSIPS GUMS ET	2	1.48

Fig 38

Daily Sales Report - By Item number

PREVIEW 17:16:05

+++ Detail Daily Sales +++
By Item NO

02/10/2000

POS #: POS

Iem_no	QTY	Amount
008210136188	1	0.85
0101	1	0.55
0114	1	0.30
0601	1	0.50
081	1	4.95
290006000288	1	1.30

Fig 39

8.1.2. Monthly Sales Report

This Monthly Sales Report is a report specified by date. That is, it is a report corresponding to a date range. Once the X-Total menu is accessed (press <2> once faced with the main menu) pressing <4> accesses the Monthly Sales Report.

The Date range is first brought up and this has to be entered to move on to the report. Specifying the numbers in DD/MM/YYYY format enters the date. This means that the first two numbers have to be the day of the month and the second two numbers the month and the last four numbers the year. Note that when entering days or months

it is required to put a zero before any number that is less than ten. That is, if the date is the 23rd of July 1999 the date would be represented as 23/07/1999, so the numbers to be entered would be 23071999.

After this the Report Set-up Screen is brought up as previously encountered with the Daily Sales Report. When this is completed the report is printed or appears on screen according to the choices made. A sample of a Monthly Sales Report is shown below.

PREVIEW 17:18:11

++ Period Sales Report ++

02/10/2000 17:17:51

POS #: POS

=====

From: / /

To :01/01/2001

TOTALS

Net Amt :	2.46

CASH :	2.46
CHEQUE :	0.00
CREDIT :	0.00
VISA :	0.00
AMEX :	0.00
M/C :	0.00
DINERS :	0.00

Fig 40

8.1.3. Instant Account

This displays the current status of the cash box. Selecting <5> from the X-Total menu chooses it. The result of the Instant Account is shown below.

CPLPOS v1.5 Monday October 02, 2000 17:18:38

++ Instant Account ++

Sales Amount :	49.04
CASH :	43.41
CHEQUE :	0.85
CREDIT :	14.78
CREDIT CARDS :	3.00

<ESC> - Exit (c) The CPL Group 95-99

Fig 41

8.1.4. Other Reports

Other reports include the Hourly Sales Report and the Daily Clerk Report both of which print directly to the printer once they are chosen from the X-Total menu.

8.2. Z-TOTAL

The Z-Total is used to reset the machine at the end of the day. Once faced with the main menu press <3> to access the Z-Total option. And then choose carefully Yes or No by pressing <1> or <2> respectively as seen in the screen below.

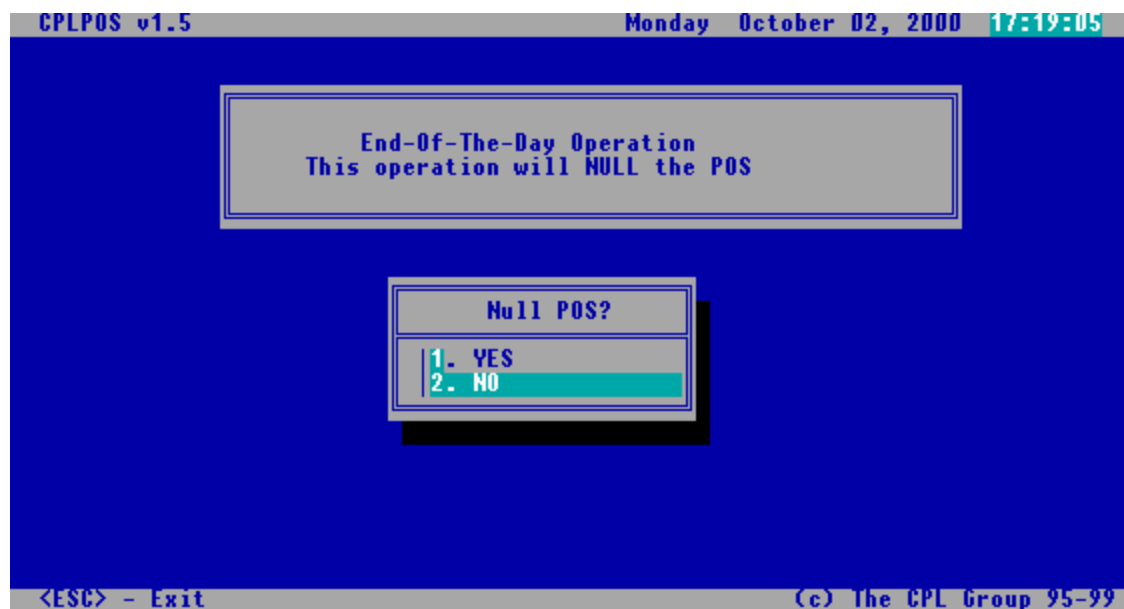


Fig 42

9. UTILITIES

These are a useful set of tools used to recover indexes, backup/restore and fix databases. In the main menu the “**9.Utilities**” choice could be selected either by highlighting with the arrow keys and pressing <ENTER> or by pressing the selection number <9> straight away. The Utilities menu is brought up:



Fig 43

The recover index choice is used to reindex the databases in case they have been corrupted. The corruption usually takes place due to switching off the machines while a transaction is occurring or other faulty use of the equipment. Once the “**Recover Index**” choice is selected using the usual technique of the arrow keys and the <ENTER> key or by selecting the number corresponding to it a screen appears to confirm the choice with a yes or no answer. Yes is to go ahead and recover the index and no is to abort the operation. After yes is selected the index is recovered.

The “**2.Backup Data**” and the “**3.Restore Data**” options are used in combination with each other to safeguard the data on the machine. By doing this there will be a copy of the data available in case the data on the machine is lost for some reason or other. Backup Data will do a copy of the existing data of the machine to external floppy disks and Restore data will copy data that has been backed up before to the machine. When either is selected a choice has to be made of where to backup the data. This could either be drive A or drive B; the default choice is drive A. The floppy disk has to be inserted in the drive and then the choice of the drive to be made (usually the A drive). The user will be prompted if further action is necessary.

In case the databases are damaged they could be fixed by the “**4.Fix Databases**” option. Once it is selected the databases are fixed straight away.

Note that in certain cases when there is physical damage to the database this utility could not be used to fix it. Therefore it is advised that you contact Technical support for further assistance.

10. SWITCHING OFF

Following that, the <ESC> key has to be pressed until the POWER OFF banner is shown below and from that moment on, you can SWITCH OFF the machine.

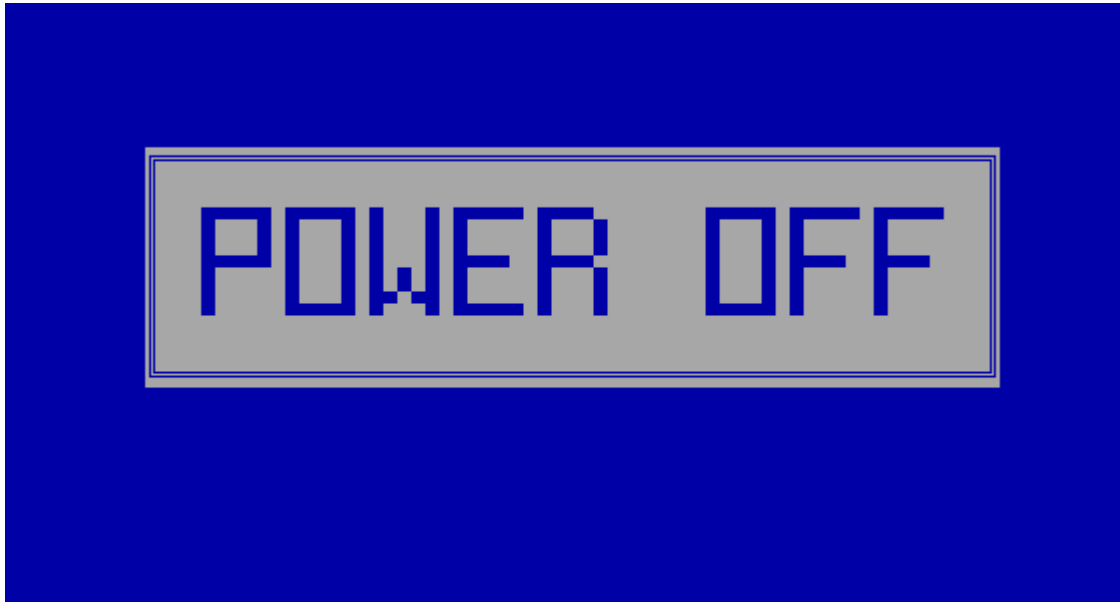


Fig 44