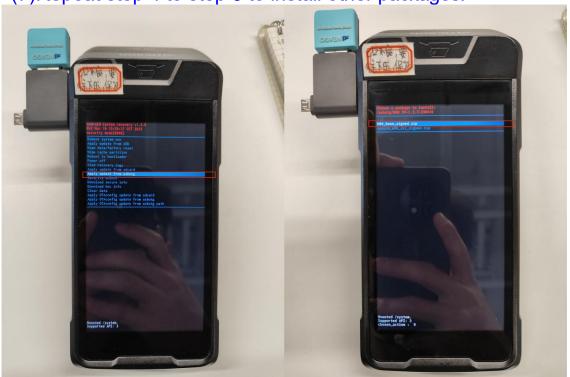# Smart POS Update

Method 1: Single OTG update (Recovery mode)

(1) Copy all the files to the U-disk.

(2) Connect the U-disk to Smart POS via an OTG cable.

(3) Hold the Volume UP button and the POWER button for few seconds until it displays the booting logo. Release the hand and POS will enters the recovery mode.

(4) Choose "Apply update from usbotg", press the Power button to confirm.

(5) Choose the file that need to be updated and press the Power button to confirm. POS will start to update

(6) After installing one file, it displays "Install from USB OTG complete".

(7) Repeat step 4 to step 6 to install other packages.

Method 2: Batch OTG update (Recovery mode)

(1)Copy all the files to the U-disk.

(2)Connect the U-disk to Smart POS via an OTG cable.

(3)Hold the Volume UP button and the POWER button for few seconds until it displays the booting logo. Release the hand and POS will enters the recovery mode.

(4)Choose "Apply OTAconfig update from usbotg" and press power button to confirm.

(5)Choose the Configuration files, you can recognize this files by the file extensions, "ini".

Method 3: OTG update on Main-page （Single Upgrade）

1. Copy all the files you want to update into a U-disk
2. Connect the U-disk to the terminal.
3. Click the Update button
4. Click the UP arrow icon, choose Local update
5. Click the search icon, choose "540B-8D0C" which means external storage ("0" means internal storage)
6. Choose the file you want to update
7. Click the button of Start install
8. Device will restart
9. Repeat steps to update other files one by one

Web: www.nexgoglobal.com
Address: 18th Floor, Block B, Building 10, Shenzhen Bay Science and Technology Ecological Park, Nanshan District, Shenzhen

3