





How to setup and edit Zoom Phone voicemail

Step 1: Start with opening Microsoft Edge. Your Zoom phone voicemail will need to be setup from your account on a web browser and not the desktop app.



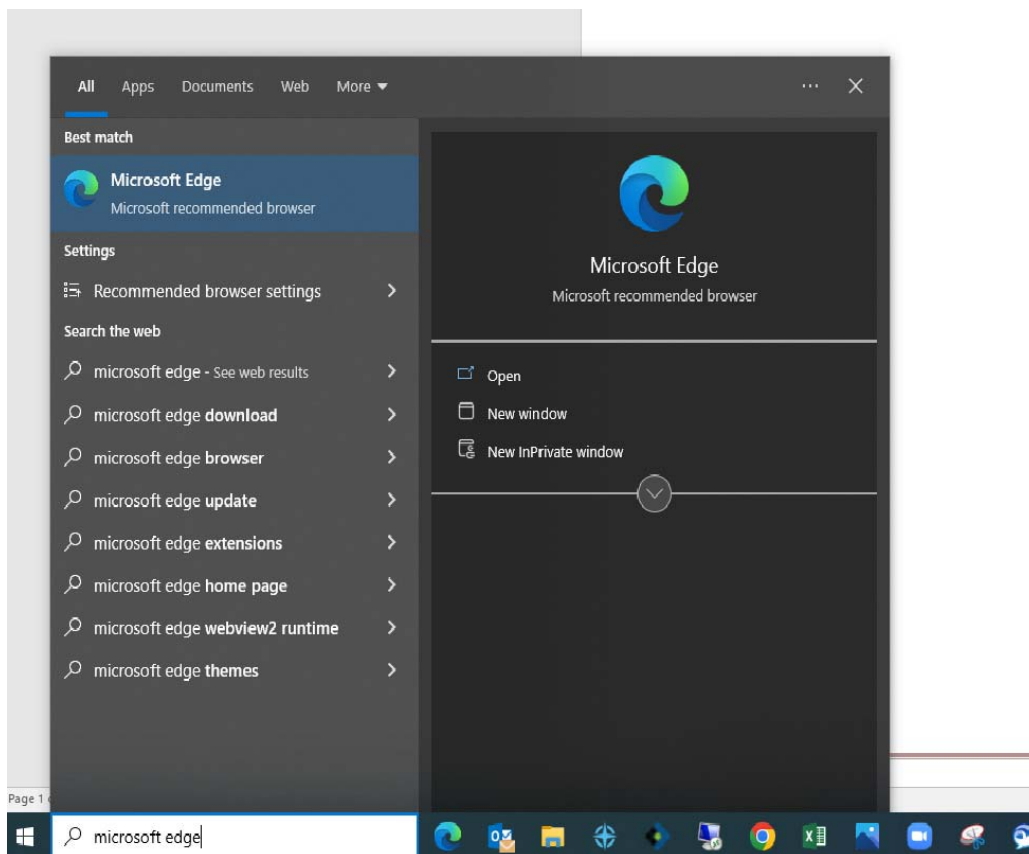

Step 2: When you have Edge open, go to <https://zoom.us/>, once there select the “sign in” option. It will take you to a sign-in screen where you can sign in with your zoom account.

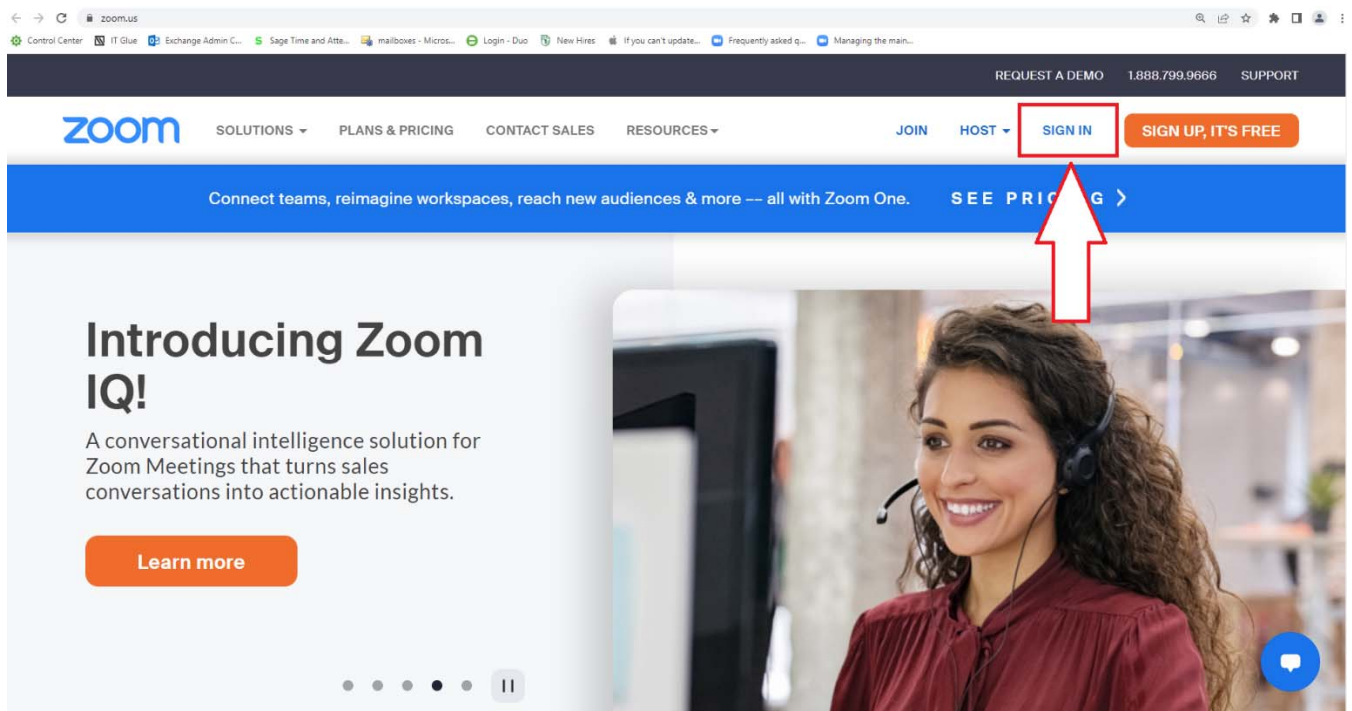



Step 3: Once you have signed in select “phone” on the left hand panel.

A screenshot of the Zoom web application interface. The browser address bar shows 'us02web.zoom.us/profile'. The top navigation bar includes the Zoom logo, links for SOLUTIONS, PLANS & PRICING, CONTACT SALES, and RESOURCES, along with buttons for SCHEDULE, JOIN, HOST, and WHITEBOARD. A left-hand sidebar contains a list of menu items: Profile, Meetings, Webinars, Phone, Personal Contacts, Whiteboards (marked with a 'NEW' badge), Recordings, Settings, Account Profile, and Reports. The 'Phone' item is highlighted with a red rectangular box, and a red arrow points to it from the right. The main content area displays a profile for 'Stephen Findley' with a placeholder profile picture, a bio, and a department of 'IT Department'. Below this, a 'Personal' section shows 'Phone' as 'Not set' with an 'Add Phone Number' link, and 'Zoom Phone' with a 'Company Number' of '+1 717-397-1841 #1308'. A blue chat bubble icon is visible in the bottom right corner.



Step 4: You will be brought to a setup screen for the extension of your zoom phone. You will need to delete what is in the, “*Set PIN code to listen to voicemail by telephone*” field and put in your extension number.(example in the box below) Click setup and your voicemail will be setup with the default voicemail option.

A screenshot of a web browser showing the Zoom Phone setup page. The browser's address bar displays "zoom.us/pbx/page/telephone/myZoomTelephony#/new-user". The page has a dark blue header with the Zoom logo and navigation links: SOLUTIONS, PLANS & PRICING, CONTACT SALES, and RESOURCES. On the left is a sidebar menu with options: Profile, Meetings, Webinars, Phone (highlighted in blue), Personal Contacts, Whiteboards (marked with a red 'NEW' tag), Recordings, Settings, Account Profile, and Reports. Below these are links to the Zoom Learning Center, Attend Live Training, Video Tutorials, and Knowledge Base. The main content area is titled "Quick setting your extension of Zoom Phone". It contains the following fields: "Company Number (717) 397-1841" and "Extension Number 1311" (the latter is enclosed in a red box); "Select country and area code" with a dropdown menu showing "United States" and a text box containing "717"; "Set your time zone. You can change it later in Profile" with a dropdown menu showing "(GMT-4:00) Eastern Time (US and Canada)"; and "Set PIN code to listen to voicemail by telephone" with a text box containing "1311" (this text box is also enclosed in a red box). A red arrow points from the right towards the PIN code text box. At the bottom of the form is a blue "Setup" button.



Step 5: (The remaining steps are to edit or change the default voicemail message if you are okay with the default voicemail message you do not need to do these)
Under the settings tab. Scroll down to the “Call Handling” Section and under “Greeting & Leave voicemail instructions” Click edit and add audio.

The screenshot shows the Zoom Phone Settings page. The left sidebar contains links for Profile, Meetings, Webinars, Phone (highlighted), and Personal Contacts. The main content area has tabs for History, Voicemail, Recording, Settings (selected), and Network Diagnostics. Below the tabs, there is a table with settings: Site (2270 Erin Court (Main Site)), Package (US/CA Unlimited Calling Plan), and Number(s) ((717) 286-0261 (United States)).

The screenshot shows the Zoom Call Handling settings page. The left sidebar contains links for Video Tutorials and Knowledge Base. The main content area has a tab for Call Handling. Below the tab, there are settings for Business Hours (24 Hours a Day, 7 Days a Week), Call Handling (Zoom Applications), Call Handling Ring Mode (Simultaneous), Max Wait Time (30 seconds), When I'm busy on another call (Call waiting), and When a call is not answered (Forward to voicemail / videomail). At the bottom, there is a section for "Choose from Asset Library" with a dropdown menu. The dropdown menu is open, showing options: "Add Audio" (circled in red), "Default", and "Edit" (highlighted with a red box). A red arrow labeled "2." points to the "Add Audio" option. Another red arrow labeled "1." points to the "Edit" option. Below the dropdown, there is a text box for "Videomail greeting can be recorded at Zoom client."



Step 6: The screen that comes up will have fields and steps to set up your voicemail message for your zoom phone. The options along the top are the options you have for setting up your voicemail. You can use the “Text to speech” option and type out a message for an automated message or record your own using the “record by computer” option. You may also upload your own audio file if you have one. After filling out the fields click add and your new voicemail message will be set.

The image shows two side-by-side screenshots of the 'Add Audio' form in the Zoom Phone interface. The left screenshot shows the 'Text to Speech' tab selected, with fields for 'Asset Name', 'Category', 'Language' (set to American English), 'Voice' (set to Kevin-Male), and a 'Message to play' text area. The right screenshot shows the 'Record by Computer' tab selected, with fields for 'Asset Name', 'Category', 'Language' (set to American English), and a 'Record Audio' section with a recording button and a timer. Both forms have a 'Visibility' section with radio buttons for 'Personal Audios' and 'Asset Library (Public)', and an 'Add' button at the bottom right.



Step 7: Test and call your voicemail and listen to the message to verify your changes have gone through.

Revision History

Name	Date	Reason for Changes	Version
Stephen Findley	10/26/22	Initial Draft	1.0 draft 1