


LUMEN STAGE

Site guide

Build a scene, shape light, frame the camera, check exposure and render the final image.

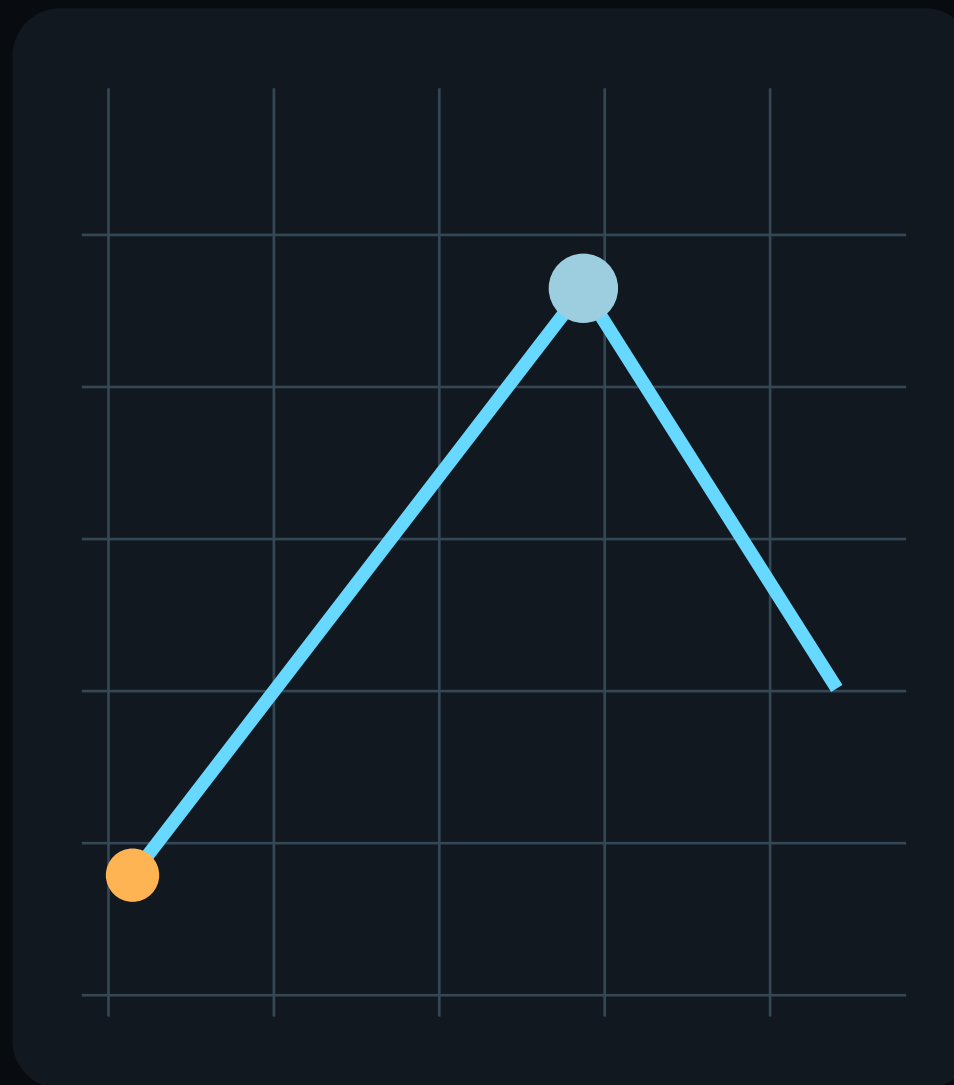

Know the workspace

One stage, three working zones. Select on the left, work in 3D, then refine on the right.

Scene library

Add and select cameras, people, lights, grip and set objects. Shift-click selects multiple lights.

3D studio

Move, rotate and aim directly in the studio. Switch among studio, top-plan and camera views.

Inspector

Tune the selected light, subject, camera or grip item without leaving the scene.

CHECK

- Top bar: project, view mode and guide
- Bottom HUD: lens, aperture, shutter, ISO and scene EV
- Shot Library stores alternate setups

Your first finished image

Work from large decisions to small ones. Position first, exposure second, rendering last.

01 · Build

Add a person and any chair, table or plinth needed for the composition.

02 · Light

Add a light, place it around 45° from the subject and aim it at the chest or face.

03 · Shape

Choose a softbox, umbrella or reflector; then set power, size and color.

04 · Camera

Choose body and lens, then set focal length, aperture, shutter, ISO and framing.

05 · Measure

Open Exposure Analysis to check EV, histogram, false color and clipping.

06 · Render

Enter Photo Render, let samples settle and export the final PNG.

CHECK

- Preview mode is for fast decisions
- Render mode is for final validation

Objects and transform tools

The object list and 3D gizmos work together. Select an item before using a transform shortcut.

Move · G

Drag the colored axes. Arrow keys nudge 0.1 m;
Shift + arrows nudge 0.5 m.

Rotate · R

Rotate people, grip and set objects. Locked items
cannot be moved accidentally.

Aim · T

With a light selected, drag its target or lock it to a
subject's face, chest or full body.

CHECK

- 1 Studio view: judge height and shadows
- 2 Top plan: judge distance and left/right placement
- Undo and redo support quick experiments

From lamp to light shaper

A believable setup depends on source power, modifier geometry, distance and direction together.

Emission

Use Continuous for live feedback or Flash for duration, sync-speed and HSS behavior.

Modifier

Softbox, umbrellas, beauty dish, parabolic, lantern, Fresnel and projection optics shape the beam.

Control

Power sets strength. A larger, closer source is softer. Grid, flags and V-Flats control spill.

CHECK

- Start the key light 45° off-axis and slightly above eye level
- Keep fill one or two stops below the key
- Use RGB only when colored light is intentional

Camera, lens and composition

Treat the virtual camera like a real one: perspective comes from camera position and focal length together.

Lens

50–85 mm is a useful portrait range; 24–35 mm includes more environment. Lens profiles add optical character.

Exposure

Start near $f/4$, $1/125$ s and ISO 100. Keep flash shutter speed inside the sync limit unless HSS is on.

Focus

Set focus distance manually or track a subject zone. Use depth preview and focus assist to verify sharpness.

CHECK

- Choose 3:2, 4:5, 1:1 or 16:9
- Switch between landscape and portrait
- Composition guides affect preview, not lighting

Measure before you render

Use analysis overlays to find technical problems while changes are still fast.

Histogram

The left edge is deep shadow and the right edge is highlight. RGB mode reveals channel clipping.

False color

Maps exposure zones to colors. Clipping warning marks areas that have lost highlight detail.

Meter probe

Place the incident probe on a face, chest, another subject or the backdrop and compare EV readings.

CHECK

- Solo one light to understand its contribution
- Return to All Lights after troubleshooting
- Judge the normal image after using overlays

Shots and setup sheets

Save meaningful alternatives instead of rebuilding a setup from memory.

Capture

+ SHOT stores the current camera, lights, people, backdrop and a thumbnail.

Load or overwrite

Load returns to a saved version. Overwrite replaces it with the current setup.

Setup sheet

Generate a top-plan diagram, equipment list and camera settings for print or handoff.

CHECK

- Name versions by camera, light angle and intent
- Example: A02_Key45_Fill-2
- Create a new Shot before risky changes

Photo render and PNG export

Progressive sampling replaces the fast viewport with a higher-quality light simulation.

Start

Choose Photo Render or press 4. SPP rises while visible noise gradually decreases.

Control

Space pauses or resumes. Shift + R restarts sampling after a scene change.

Export

After at least 1 SPP, export PNG with the chosen crop, resolution, optics, color and sensor effects.

CHECK

- 32–64 SPP is often enough to evaluate
- Dark and reflective scenes usually need more samples
- Check focus, clipping and color temperature before export

Advanced production tools

Open PRO only when the shoot needs cinema parameters, multiple cameras, environments or advanced output.

Capture

PHOTO / CINEMA, FPS, shutter angle, T-stop, ND and anamorphic controls.

Stage

Multiple camera slots, studio dimensions, window, sun, haze and subject look-at tracking.

Pipeline

HDRI, IES and GLB imports; quality and resolution presets; timeline, storyboard and project merge.

CHECK

- Press P to open or close PRO
- Finish the basic studio setup first
- Use Live Denoise for cleaner previews

Projects and essential keys

Browser saves are convenient; exported project files are the portable backup.

Save

Save Scene or ⌘S writes the current project to this browser.

Export

File → Export Project or ⌘E downloads a JSON file for backup and transfer.

Import / merge

Import opens another project. Merge Project in PRO combines it with the current scene.

CHECK

- 1 / 2 / 3 / 4 · studio / top / camera / render
- G / R / T · move / rotate / aim
- M · exposure B · shots P · PRO
- ⌘Z / ⌘Z · undo / redo Esc · close or cancel