
LETTER CHARMS A–Z + 0–9 · FOR 4 MM PARACORD

Spell It, Print It!

Start here: printing and stringing your chunky letter charms

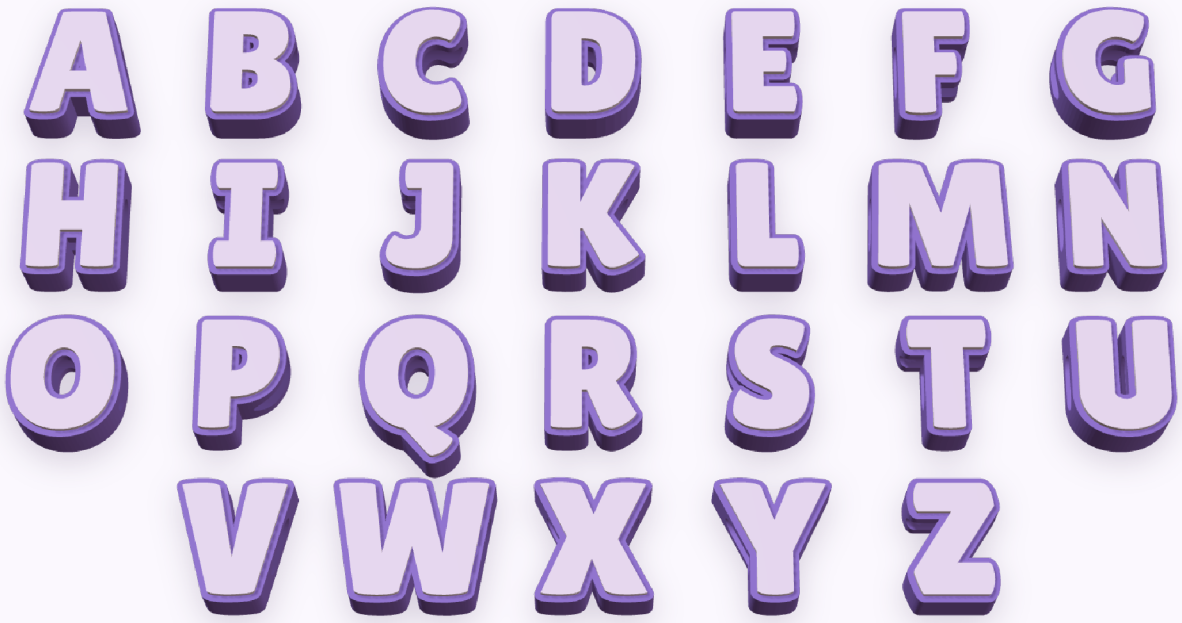

What's in your download

3MF folder	**Letters-A-Z.3mf** and **Numbers-0-9.3mf**: Bambu Studio projects, each on one plate, two colours set. **Start here if you use Bambu Studio.**
STL folder	36 files, one per character (Letter-A … Number-9), for any slicer.
LICENSE.txt	Your commercial licence (page 3).

Digital download

You bought **3D print files**. Nothing is shipped. **Paracord and spacer beads are not included.**

Sizes

Each charm is **20 mm tall, 9 mm thick** (Q 24.8 mm with its tail), 11–25 mm wide. One **9 × 4.5 mm slot** runs side to side and holds **two 4 mm (550) paracords**.

Print your letters

Bambu Studio (3MF)

1. **File › Open Project…** and pick **Letters-A-Z.3mf** or **Numbers-0-9.3mf**. Everything is on one plate with two filaments: **1 = body** (purple), **2 = face** (lilac).
2. Want other colours? Click a filament's colour square in **Project Filaments** and pick a new one.
3. Only need some letters? Delete the ones you don't need, or copy-paste (**Ctrl+C**, **Ctrl+V**) letters you need twice, like the two Es in a name.
4. **Slice plate**, then print. Slicer estimate on a Bambu Lab A1: A–Z about 1 h 53 min, 40 g; 0–9 about 47 min, 14 g. Just **one colour change**, because the face is the top 1 mm.

Any other slicer (STL)

Import the STL files you need (OrcaSlicer, PrusaSlicer, Cura…). They already lie flat, face up. Don't turn them.

Two colours on a one-colour printer: in the sliced preview, add a **pause / filament change** at the first layer of the face (at about **8.0 mm** height), swap filament and resume.

Suggested settings

Setting	Value
Orientation	Flat, face up (as the files open)
Supports / brim	Off / off. The slot bridges by itself.
Layer height	0.20 mm
Walls / infill	3 walls, 15–20 %
Material	PLA (PETG works too)
Bed	About 65 °C for a full plate, so small letters stay down

Suggested starting settings. Every printer is a little different.

Good to know

Thin parts of a few letters (N, P, W) come close to the slot. You may see a tiny gap there; it doesn't affect stringing. If you prefer, print those letters with 4 walls.



Two 4 mm cords through the slot.

String it & sell it

Make a keychain

1. Fold a length of **4 mm (550) paracord** in half.
2. Push the **loop end** through each letter's slot, both strands side by side. Add spacer beads between letters if you like (not included).
3. Tie a knot (a snake or diamond knot looks great) above and below the name, and add a keyring or clip.



Your commercial licence: you may

✔ Print as many charms as you like
✔ Sell the printed charms and keychains, online and in person
✔ Personalise them for customers, any colours
✔ Use photos of **your own** prints

You may not

✘ Share, sell or upload the **files** (STL, 3MF) or this guide, changed or not
✘ Claim the design as yours
✘ Use our listing photos

The cord is tight in the slot

Printed holes come out a little smaller than modelled. Clean the slot with a 4.5 mm drill bit by hand, or wrap tape around the cord's cut end so it slides in more easily.

Need help?

Message us through Etsy. We're happy to help. Design rights remain with Valencia Holdings Inc.