Your Stand, Your Name!

Start here: how to add a name and print your folding phone stand



Thank you for your purchase! This little keychain folds flat for your keys, flips open into a phone stand, and has a **can tab lifter** at the tail. The side has a name that **you can change** before printing.

What's in your download

SMALL & LARGE Bambu 3MF EditableName	Bambu Studio project: colours set, name box ready to rename. **Start here if you have Bambu Studio.**
SMALL & LARGE STL files BODY + FLAP	Plain shapes for any printer and slicer. Add a name in your slicer, or print plain.
Fredoka font	The free font used for the name (SIL Open Font License).

This is a digital download

You bought **3D printing files**. Nothing is shipped. To make the stand you need a 3D printer (yours, a friend's, a library or a print service). **You may sell your prints:** see page 8.

Two sizes

Small for phones up to **12 mm** thick (with case). **Large** for thick or rugged cases up to **13.5 mm**. Not sure? Measure your phone in its case (page 2).

Before You Start

Pick your size, pick your file, and you're ready.

1. Pick your size

	Small	Large
Phone + case thickness	up to 12 mm	up to 13.5 mm
Folded size	70.7 × 35 × 11.5 mm	76.9 × 35 × 12.5 mm
Opens to	about 85°, holding the phone screen at about 67° from the desk	
Built in	keyring hole (5 mm) · can tab lifter at the tail · flat name area on the side	

Measure your phone **in its case** at its thickest point (the camera bump does not count if it is not at the bottom edge).

2. Pick your file

	Bambu 3MF	STL
Use with	Bambu Studio	Any slicer (OrcaSlicer, PrusaSlicer, Cura...)
Name	✔ ready, just retype it	Add it yourself (page 5)
Colours	✔ navy, orange, white set	✘ you choose
Plates	✔ 2 plates set up	BODY and FLAP files

Screenshots: Bambu Studio 2.8 and OrcaSlicer 2.4. Other versions may look a little different.

3. Printer & filament

Any FDM printer with a bed of at least **100 × 100 mm**. **PLA** is suggested.

Two pieces, snapped together

The **body** and the **flap** print separately (on their side, no supports) and snap together for good after printing (page 6).

Install the font (optional)

Double-click **Fredoka-Bold.ttf** and choose **Install**. Do it **before** opening your slicer. Any other bold font works too.

The Bambu Studio route in 5 steps

1 Open the SMALL or LARGE 3MF → **2** Click text_shape, then the Ta tool → **3** Type the name → **4** Slice and print plate 1 (body) → **5** Print plate 2 (flap), snap together


METHOD 1 · BAMBU STUDIO

Change the name in Bambu Studio

The project already has a white name that says **NAME** on the side of the stand. You just retype it.


1 Open the project

File › Open Project… and pick **PhoneStand-SMALL-Bambu-EditableName.3mf** (or LARGE). It opens with three colours set up (1): the body and name on **plate 1** (2) and the flap on **plate 2** (3).

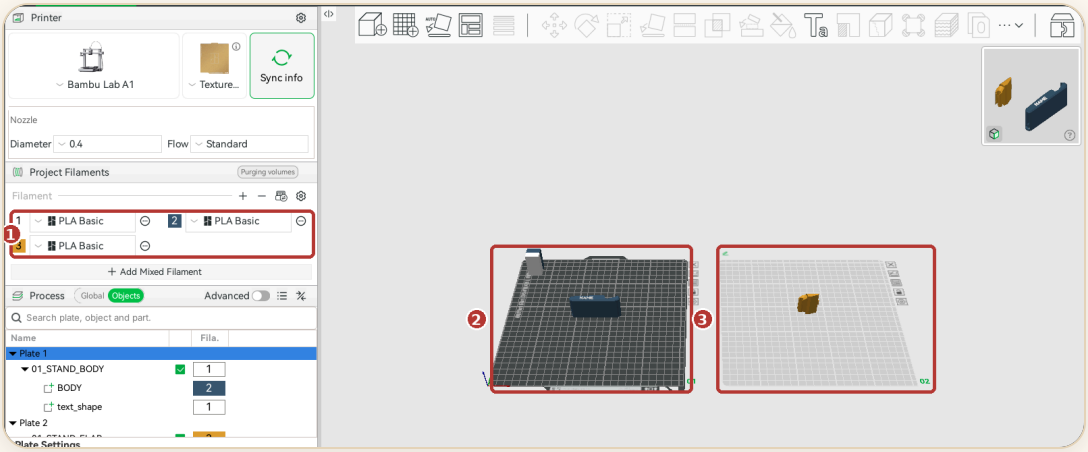

2 Click text_shape, then the Ta button

In the **Objects** list on the left, click **text_shape** (1). Then click the **Ta** **Text shape** button at the top (2).

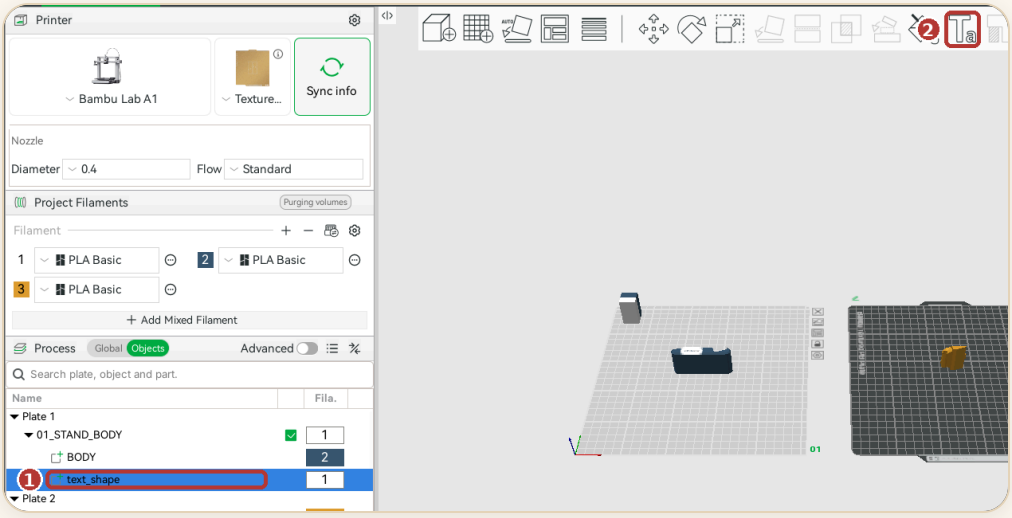


Important: click **text_shape** in the list first. If you click empty space in the 3D view and then **Ta** , Bambu Studio makes a **new, separate** text called "Text" instead of editing the name. If that happens, press **Ctrl+Z** and try again.

Type it, slice it, print it

3 Type the name

1. **Input text:** delete NAME and type the name.
2. **Font:** Fredoka is set. Want another? Click it and type to search.
3. **Size: 7 mm**. Lower it for long names.
4. **Thickness: 0.6 mm** (how far the letters stand up).
5. **Operation:** leave on **Part**.

Click **return** (top left of the 3D view) when you're done.

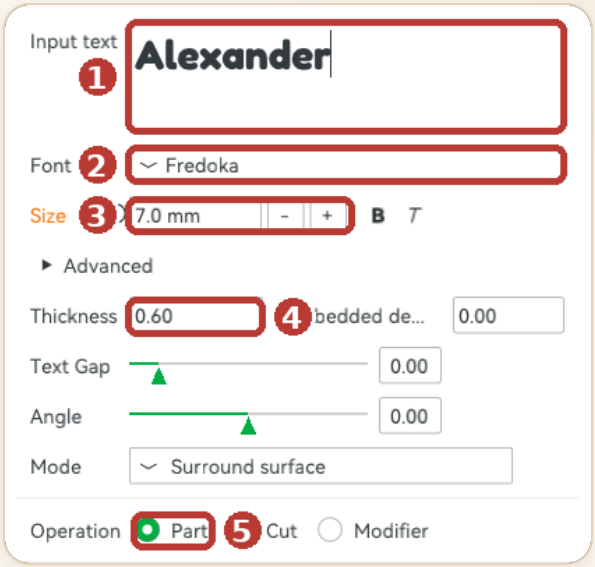


4 Check it fits

Keep every letter on the **flat part of the side**, left of the dip where the phone sits. At 7 mm, a 9-letter name like **Alexander** fits the Small. To move the name, drag the small yellow square in its middle.




5 Slice and print plate 1

With plate 1 selected 1, click **Slice plate**. You should see **1 filament change** 2 (white starts at the name) and a top height of **35.60** 3. Then **Print plate**.

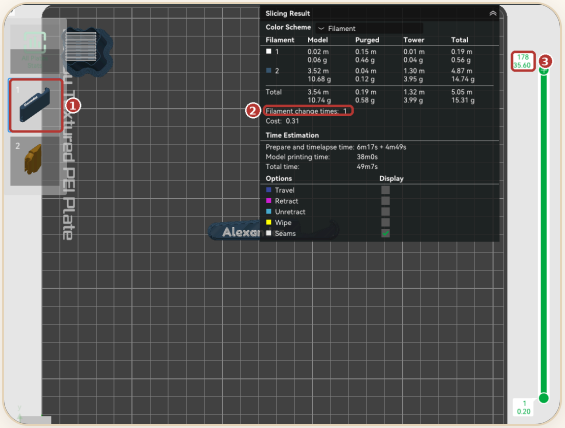

6 Then plate 2 (the flap)

Click the plate 2 thumbnail 1, slice, print. It is one colour, so **0 filament changes** 2.

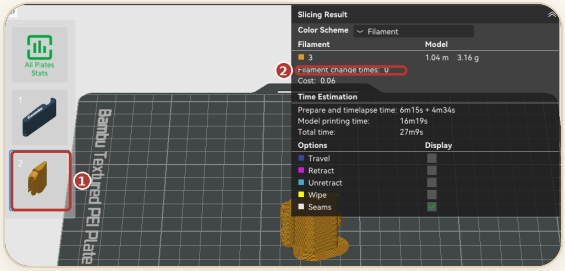

Slicer estimates on a Bambu Lab A1: plate 1 about 50 min, plate 2 about 27 min.

METHOD 2 · ANY OTHER PRINTER

STL files + your own name


The STL files are plain shapes with an empty name area on the side. Here is how to add a name in **OrcaSlicer** (free). PrusaSlicer and Bambu Studio have a similar text tool.

1 Open the BODY file

Drag **PhoneStand-SMALL-BODY.stl** (or LARGE) into OrcaSlicer, or use **File › Import**. It lies on its side, name area facing up. Don't turn it.


2 Right-click the side

Zoom in, then right-click the **flat part of the side**, left of the dip. Choose **Add Part** 1 › **Text** 2. The text appears where you clicked.

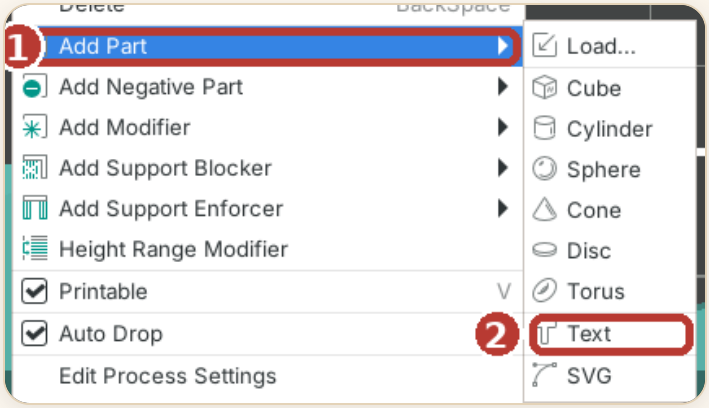

3 Type the name and settings

1. Type the name in the text box.
2. **Font:** type **Fred**, choose **Fredoka**.
3. **Height: 7 mm** (same as Size in Bambu Studio).
4. **Depth: 0.6 mm**. Leave Operation on **Join**.
5. Click **Done**.

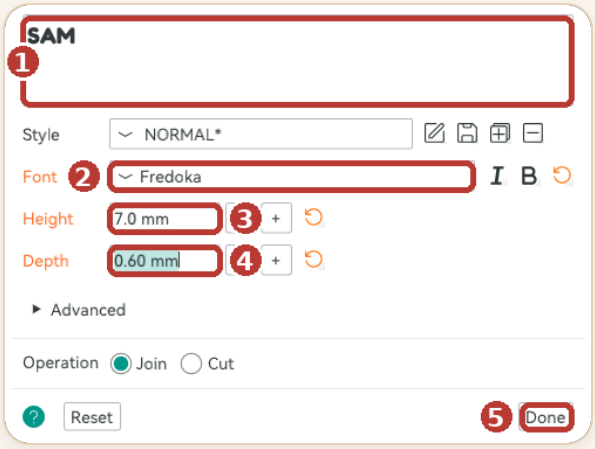

4 Slice and check

Click **Slice plate**. The top height should read **35.60** 1 and the name should show 2. Then print the **FLAP** STL the same way (no name needed).

Slicer estimate on an Ender-3 V3 SE profile: about 45 min for the body.



Name in a second colour on a one-colour printer: in the sliced preview, find the layer at **35.2 mm** (the first layer of the letters), right-click the slider handle and choose **Add Pause**. When the printer pauses, swap filament and resume. **Cura** has no text tool: print the stand plain, or add the name in Tinkercad first.

Print it, snap it, use it

Suggested print settings

Setting	Value	Why
Orientation	As it opens (on its side)	The files are already turned the right way. The hinge, hook and lifter are shaped to print with **no supports**.
Supports / brim	Off / off	Not needed. Add a brim only if a corner lifts on your printer.
Layer height	0.20 mm	The 0.6 mm letters print as 3 crisp layers.
Walls	3 (or 4)	The snap clip on the flap and the click in the hook are thin, springy parts. More walls make them solid.
Infill	15–20 %	Plenty for a keychain.
Material	PLA (PETG also works)	PLA is easiest. PETG is a bit tougher for the lifter.


These are suggested starting settings. Every printer is a little different.

Snap the flap on (once, for good)

1. Hold the flap at about **45°** to the body, its open clip facing the round shaft in the body's hinge slot.
2. Press firmly until it **clicks**. The clip is one-way: it stays on for good.
3. Fold it flat: it **clicks shut** under the front hook. Push the flap up from the middle cut-out to open it. It stops at the open position.



Open: the phone sits in the hook (right) and leans on the flap.

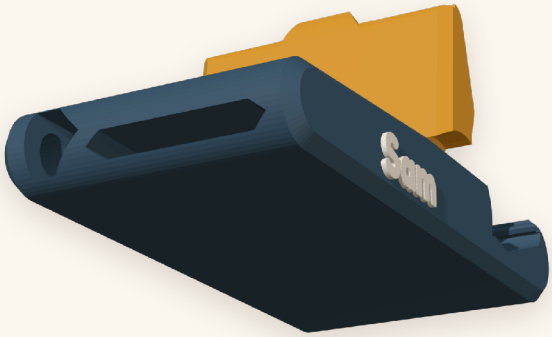

Tail: keyring hole and can tab lifter slot.

Using it

Stand: open the flap, stand the phone in the hook at the front, lean it on the flap. Made for landscape (sideways) viewing.

Can lifter: slide the slot at the tail under the can's tab and lift.

Keys: a keyring fits the 5 mm hole at the tail.

Troubleshooting & FAQ

The name is too long

Lower the Size (Bambu) or Height (Orca) to 6 mm, or use first names and initials. The Large has about 6 mm more room than the Small.

A new "Text" object appeared instead


You clicked the Ta tool with nothing (or the wrong thing) selected. Press `Ctrl+Z`, click **text_shape** in the Objects list, then `Ta`.

The name doesn't show in the preview

The letters must sit on the side's flat area. If they hang over the edge or the dip, drag them back. Check the top layer reads 35.60.

I want other colours

In Bambu Studio, click a filament's colour square in **Project Filaments** and pick a new colour. Filament 1 = name, 2 = body, 3 = flap.

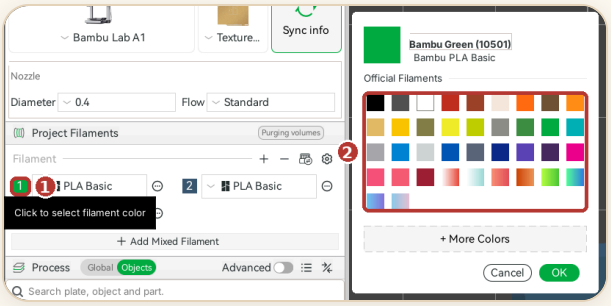

Why are the body and flap on separate plates?

They are the same height. Printed side by side in two colours, the printer would swap filament on **every layer** (we measured 176 swaps). On separate plates, plate 1 swaps once and plate 2 not at all. One-colour stand? Drag the flap onto plate 1.

The font is missing

Install **Fredoka-Bold.ttf** (included) and restart the slicer. Bambu Studio still shows the name if the font is missing, but uses another font when you edit it.

The flap is hard to snap on

Hold it at 45° and press straight down onto the shaft. If your printer runs a little tight, sand any blob off the clip's lips first.

Can I print several?

Yes. Select the stand and copy-paste it (`Ctrl+C`, `Ctrl+V`); each copy has the same name. For a different name, use **File › Save Project as...** for each person.

Need help?

Message us through Etsy. We're happy to help.

Seller licence: you may sell printed stands. Please don't share or resell the files. Full terms on page 8 and in SELLER-LICENSE.txt. Fredoka font: SIL Open Font License 1.1.

Selling your prints

Your licence lets you sell the printed stands. Here is what that covers, and a few tips.

You may

✔ Print as many as you like
✔ Sell the **printed** stands online, at craft fairs and in person
✔ Personalise them with any name, in any colours
✔ Advertise with photos of **your own** prints

You may not

✘ Share, sell or upload the **files** (3MF, STL) or this guide, changed or not
✘ Claim the design as yours
✘ Use our listing photos in your shop
✘ Pass the licence to another shop

Cost per stand (slicer estimates, Small, PLA, Bambu Lab A1)

Part	Filament	Time
Plate 1: body + name	about 15 g (incl. purge and prime tower)	about 50 min
Plate 2: flap	about 3 g	about 27 min
Total	about 18 g ≈ **$0.40** of filament at $20/kg	about 1 h 17 min

Large: about 17 g + 3.5 g, about 52 + 27 min. Your printer, settings and filament price will differ.

Tips for orders

1. **Several names on one plate:** select the stand, copy-paste it (`Ctrl+C`, `Ctrl+V`), then click the copy's **text_shape** › `Ta` and type the next name. All the names start at the same height, so the colour swap should still happen once per plate. Check **Filament change times** after slicing.
2. **Flaps in bulk:** fill plate 2 with flaps (copy-paste). They are all the same, so print a batch in each colour you offer.
3. **Save each order:** `File › Save Project as...` with the customer's name, so a reprint takes one click.
4. **Before you sell:** test-print one of each size, fold it, open it, try the lifter on a can, and stand your phone in it.