



Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA

THE APP GUIDE

SEPTEMBER 2026



Omega Logic

Your business in one app.
On your phone and in your browser.

SALES · CUSTOMERS · PLANT · DELIVER · STOCK · MONEY



Point your phone's camera here

Tap the link that pops up. Then follow the steps for your phone: iPhone on page 3, Android on page 4.

Or type this into your browser. Reading this on your phone?
Just tap it.

silmarillion.clearskyomega.com/logic

ClearSky Energy Solutions

Omega Logic is ClearSky's app. Your company is the workspace inside it.



Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA

START HERE

Before you start

Omega Logic is one app for running your business: sales, customers, the plant, deliveries, stock and money. ClearSky makes it. Your company is the **workspace** inside it, so everyone at your company sees the same orders and the same numbers.

What you need



Your work account. Google with your company email, or your work email and a password, like **you@yourcompany.com**. Not a personal Gmail.



A place on your company's workspace. Your company's owner or an administrator adds you on **Team** (page 13). If your company isn't on Omega Logic yet, ClearSky sets it up.



A phone, tablet or computer. iPhone or iPad with Safari, an Android phone with Chrome, or any computer with Chrome, Edge or Safari.



Nothing from an app store. You add it straight from the web page. It's free to install, and it updates itself every time you open it.

Three steps, once



Open the address

Type the address below, or tap it if you're reading this on your phone. Or scan the code on the front page with your phone's camera.



Get the app

iPhone and iPad: **page 3**
Android: **page 4**
A computer: **page 5**



Sign in

With your work Google account, or your work email and password. Your company's workspace opens by itself. **Page 6.**

The address **silmarillion.clearskyomega.com/logic**

Open it in Safari or Chrome, not inside another app

If you tap the link in Gmail, Outlook, Teams, Slack, LinkedIn or WhatsApp, it opens inside that app, and there is no way to add it to your phone from there. Look for **Open in Safari** or **Open in browser**, or copy the address and paste it into Safari (iPhone) or Chrome (Android). Use a normal window, not a Private or Incognito one.

Scanning the code

iPhone: open the **Camera**, point it at the code and tap the link that appears at the bottom of the screen. Android: the camera or Google Lens does the same. The page opens in your browser. Carry on from step 2.




Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA

GET THE APP · 1 OF 3


iPhone and iPad

Use **Safari** and open **silmarillion.clearskyomega.com/logic**. About a minute, once. The **orange ring** in each picture is where you tap.

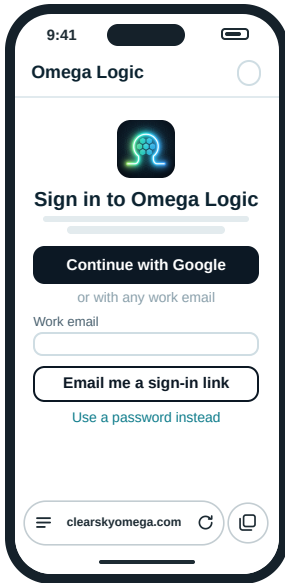


1 Open it in Safari

Type the address above in the address bar and go, or scan the code on the front page.

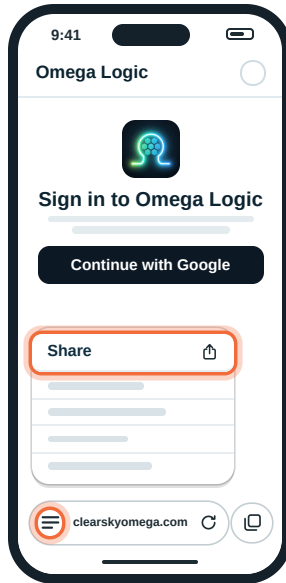


2 Tap the menu, then Share

iOS 27: Page Menu ≡, left of the address bar. **iOS 26:** More ... at the right. Then tap **Share**. See a  button? Tap that.

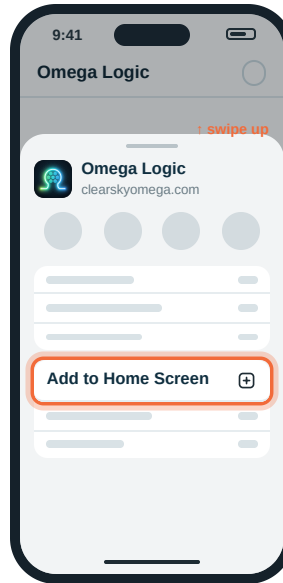

3 Add to Home Screen

Swipe up on the sheet, or tap **View More**. Scroll down and tap **Add to Home Screen**.

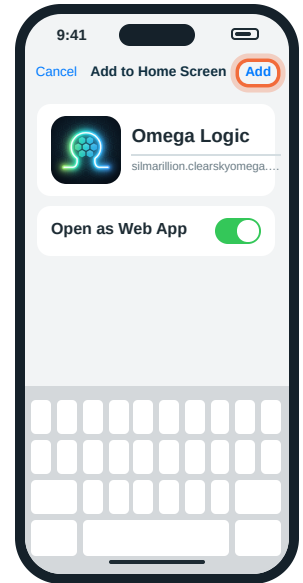

4 Tap Add

Leave **Open as Web App** on (green) and tap **Add** at the top right. No switch? Older iOS: just tap **Add**.



Omega Logic

Done. From now on, open Omega Logic from its icon, not from Safari; it opens full screen. **Sign in once more inside it:** the app keeps its own sign-in. If **Continue with Google** brings you back still signed out, use your work email and password (page 6). The icon is only on the phone or iPad where you added it.

iPad

Tap **Share**  at the top right of Safari (none there? tap ... or ≡ beside the address, then Share). Then **View More** (iPadOS 26: ... More), then **Add to Home Screen**. Keep **Open as Web App** on (older iPads have no switch) and tap **Add**.

Chrome on iPhone

Tap **Share**  at the right of the address bar, then **Add to Home Screen**, then **Add**. It works, but Safari is the surer way.

No Add to Home Screen?

At the bottom of the share sheet, tap **Edit Actions** and add it. Still missing? You're in another app or a Private tab: use Safari.




Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA

GET THE APP · 2 OF 3


Android phones and tablets

Use **Chrome** and open silmarillion.clearskyomega.com/logic. About a minute, once. Tap where the **orange ring** is.

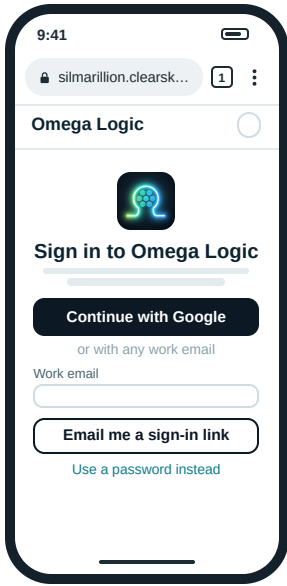


1 Open it in Chrome

Type the address above or scan the code on the front page. Opened inside another app? Tap **:** and **Open in Chrome**.

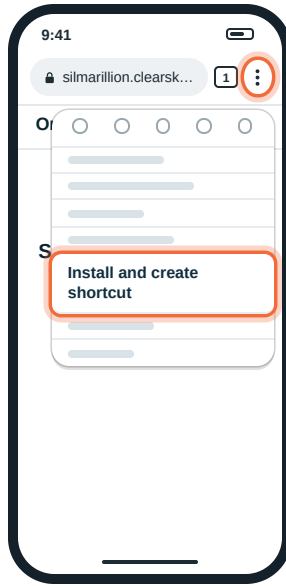


2 Tap **:**, then Install

: is at the right of the address bar. Tap **Install and create shortcut**. Older Chrome says **Add to Home screen** or **Install app**.

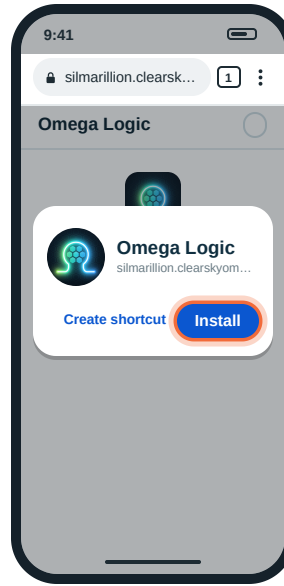

3 Tap Install

Chrome shows **Omega Logic** with its icon. Tap **Install**, not **Create shortcut**. If your phone asks where to put it, tap **Add**.

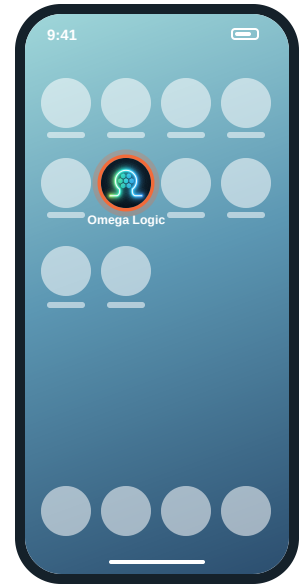

4 Open it from the icon

It's on your home screen and in your apps. Open it from there, full screen, and sign in: Google, or your work email and password (page 6).

Chrome offered to install it by itself

If a bar or a pop-up at the bottom of the screen offers to install Omega Logic, tap **Install**. Same result, one step.

Samsung phones

Chrome gives the cleanest install, so use it if you have it. In Samsung Internet (called **Samsung Browser**, or just **Browser**, on newer Galaxy phones): tap the install icon in the address bar if there is one. If not, tap **≡** at the bottom right, then **Add page to**, **Home screen**, **Add**.

Other browsers

Edge and Firefox on Android can add it too, but the steps change often. Use Chrome.

No install option at all?

You're inside another app (Gmail, Outlook, Teams...) or an Incognito tab. Open the address in a normal Chrome tab.




Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA

GET THE APP · 3 OF 3

On a computer

Nothing to install unless you want to. Open silmarillion.clearskyomega.com/logic in Chrome, Edge or Safari and sign in. Installing gives it its own window and a taskbar or Dock icon.

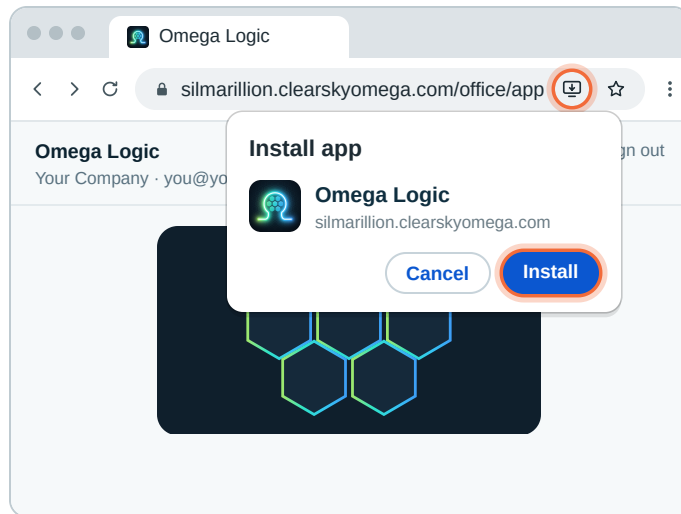

Chrome: the Install icon  sits at the right end of the address bar.



Chrome (Windows, Mac, Chromebook). Click the Install icon  in the address bar, then **Install**. No icon? **:** → **Cast, save, and share** → **Install Omega Logic...** (while it loads: **Install page as app...**; not **Create shortcut...**) → **Install**.



Microsoft Edge. Click **App available** in the address bar, then **Install**. Or **...** → **More tools** → **Apps** → **Install Omega Logic** (or **Install this site as an app**). Tick **Pin to taskbar** if you like.



Safari on a Mac (macOS Sonoma 14 or later). **File** → **Add to Dock**, then **Add**. It keeps its own sign-in, so sign in once inside it (Google, or your work email and password).




Firefox. On Windows, click **Add tab to taskbar** in the address bar. On a Mac, bookmark it instead.



Or just bookmark it. **Ctrl+D** on Windows, **Cmd+D** on a Mac.

The desktop office: more room, same data

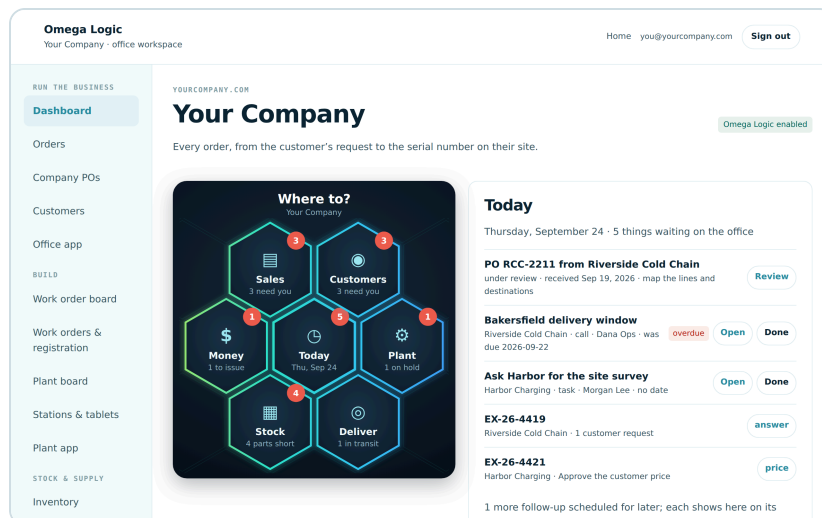

The desktop office: the same hub, with room for the detail.

At a desk, open

silmarillion.clearskyomega.com

/omega-logic, the **desktop office**. Same sign-in, same workspace, laid out for a big screen: pricing and accepting orders, Team, Accounting, a customer's list of sites, shipping and receiving, the fleet register, the materials plan and the full reports.

Bookmark it (**Ctrl+D** / **Cmd+D**); it doesn't install.

From the app: **Menu**, then **Price & accept** under Sales (shown to whoever may price, page 13). What you save on either is on the other straight away.




Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA

SIGN IN

Sign in and your workspace

Omega Logic works out your company from the account you sign in with. One company: you go straight in. More than one: you pick it from a list, and **Switch** at the top changes company later.

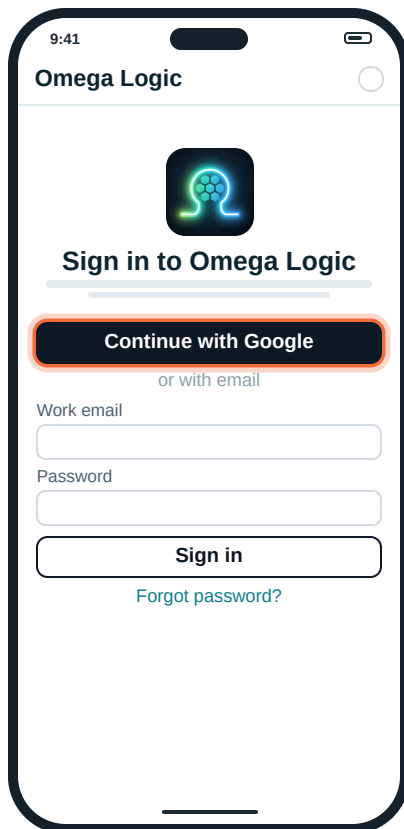

In the app on an iPhone Home Screen.

- 1 Open **Omega Logic** from its icon and tap **Continue with Google**.
- 2 Pick your **work** account, **you@yourcompany.com**. If Google shows a personal account first, choose the work one.
- 3 Your company's workspace opens by itself, its name at the top. More than one company? Tap yours under **Choose your company**.

No Google account at work? In a browser, and in the app on Android, type your work email and tap **Email me a sign-in link**, then open the email on the same device; **Use a password instead** switches to your password. In the app on an iPhone Home Screen (the picture) a link would open in Safari, so it is Google or your password. No password yet? Tap **Forgot password?**.

What the top of the screen tells you

Omega Logic

Your Company · you@yourcompany.com

Switch



Sign out

Your Company is the workspace you're in, then who you're signed in as. **Switch** shows only with more than one company;  fetches the latest. **Sign out** (use it on a shared computer) also forgets the company until you sign in again.

"No workspace at yourcompany.com"

The email you signed in with isn't on a workspace yet: a personal Gmail, or a work email nobody has added. Tap **Sign in with another account** and use your work account, or ask your company's owner or an administrator to add you on **Team**.

Your phone and your computer

Sign in once on each. An installed app keeps its own sign-in, separate from the browser. If **Continue with Google** brings you back still signed out, use your work email and password.

Who can change what

Everyone on the workspace sees the same data. An **owner or administrator** adds and disables people on **Team**, prices the orders your company bills itself, sets terms and changes settings (page 13). If a button isn't there for you, that's why.

Company not on Omega Logic yet?

ClearSky sets up workspaces. Write to **dev@clearsky-usa.com** and say who should be the first person on it.




Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA

USING IT · HOME

Home: the hex hub

Home asks **Where to?** Seven hexagons, one for each part of the business, drawn from the Omega Logic logo. A red number is how many things there need a person.

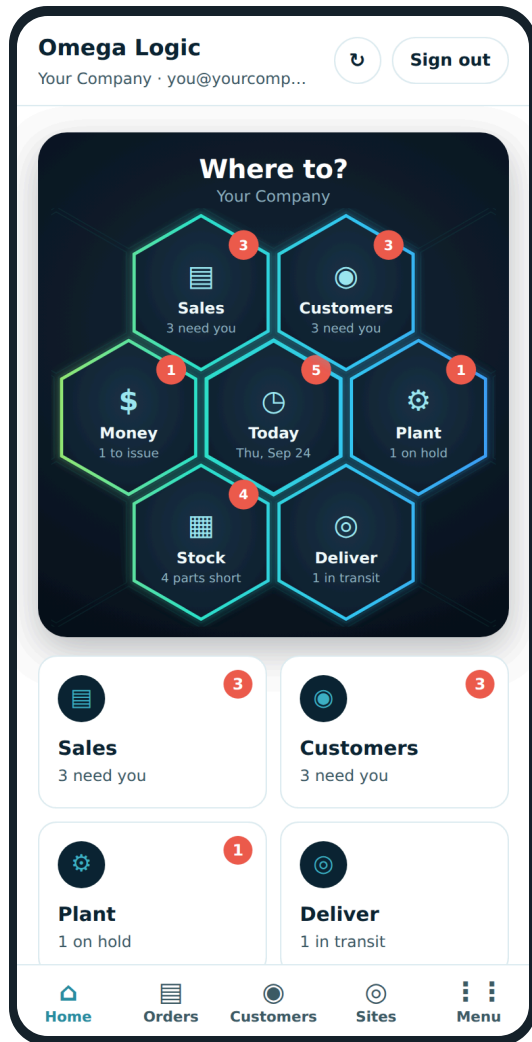

Home. Tap a hexagon.



Today, in the middle. Everything that needs a person today: customer requests, orders you may price or accept, POs to review, follow-ups that are due. Tap it to jump to the list.



Sales. Orders to price and accept, customer requests to answer, company POs to review. An order waiting on ClearSky or on an administrator is listed with who it waits on, never counted.



Customers. Every customer account (page 8). The number is follow-ups due and people asking to join.



Plant. Work orders: late, on hold, in build.




Deliver. Units ready to ship, units a customer placed at a site for you to confirm, loads on the road.



Stock. Parts short for the open work.



Money. Invoices to issue, overdue and open, each with its pay link. Corrections: Accounting (page 12).

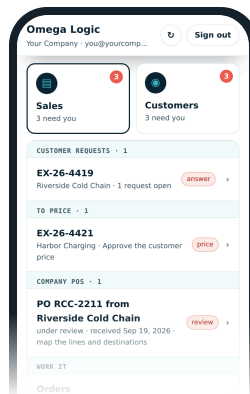

Tap a hexagon, its panel opens

Under the hub: first the live list (tap a line to open it), then **Work it**, every screen for that part of the business. Tap another hexagon to switch. Below the panels, Home lists what needs a person, then money and the plant.

Five tabs along the bottom



Home the hub and Today. **Orders** every order. **Customers** every account. **Sites** where every unit is. **Menu** every screen, with a search box. More on pages 8 and 9.




Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA


USING IT · CUSTOMERS

Customers: the whole account in one place


Like the customer hub in QuickBooks. Tap **Customers** and pick a company: its account, with its people on it, is on one screen, in sections across the top.

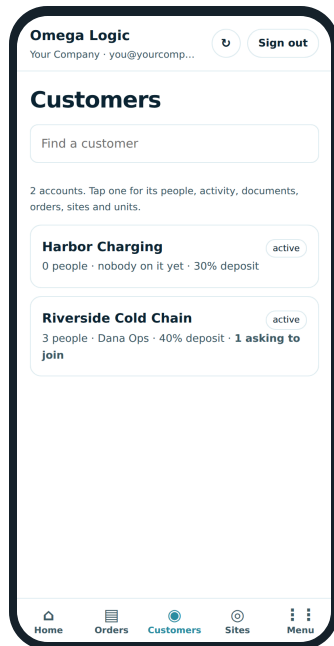


Customers. Search, then tap one.

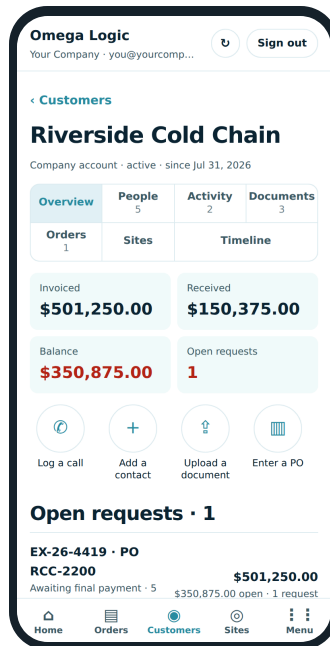

Overview. Money, requests, quick buttons.

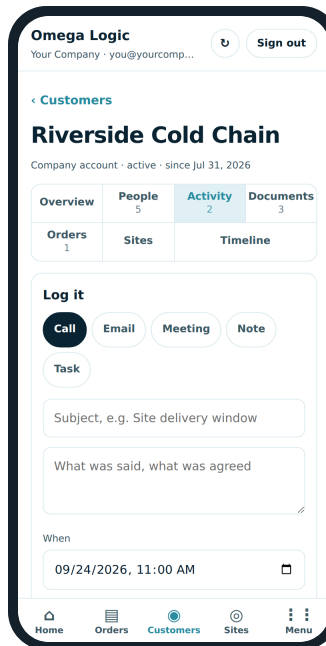

Activity. Log a call, set a follow-up.

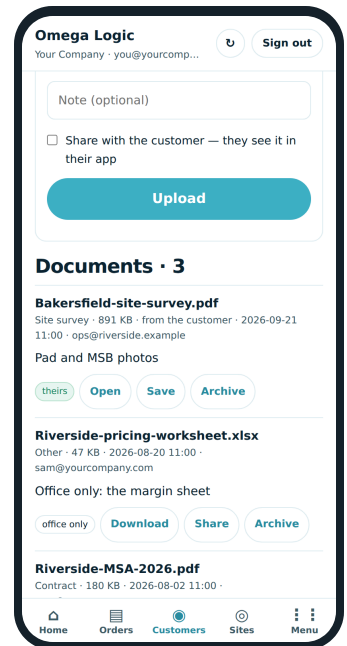

Documents. Upload, choose who sees it.

The sections

Overview

Invoiced, received, the balance and open requests. Quick buttons: **Log a call**, **Add a contact**, **Upload a document**, **Enter a PO**. Their app: the link to send them, and the **Company email domain** (page 14).

People

Who signs in to their app: **Approve** someone who asked to join, **Turn off** someone who left, **Invite** (**Share app link** when your workspace sends no invitation email), or add a person. Plus contacts who never log in.

Activity

Log a call, email, meeting, note or task. Put a date in **Follow up on** and it shows on **Today** that day, until you mark it done.

Documents

A contract, a drawing, a photo (up to 2 MB). Tick **Share with the customer** and they see it in their app; unticked, it stays in your office. What they upload lands here too.

Orders

Every order and PO on the account. **Enter a PO** for them: it becomes an order waiting for a price; nothing is accepted or charged.

Sites

Their sites and the units at each. Tap a unit for its passport.

Timeline

All of the above, newest first.




Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA


USING IT · THE TABS

Orders, Sites and the Menu

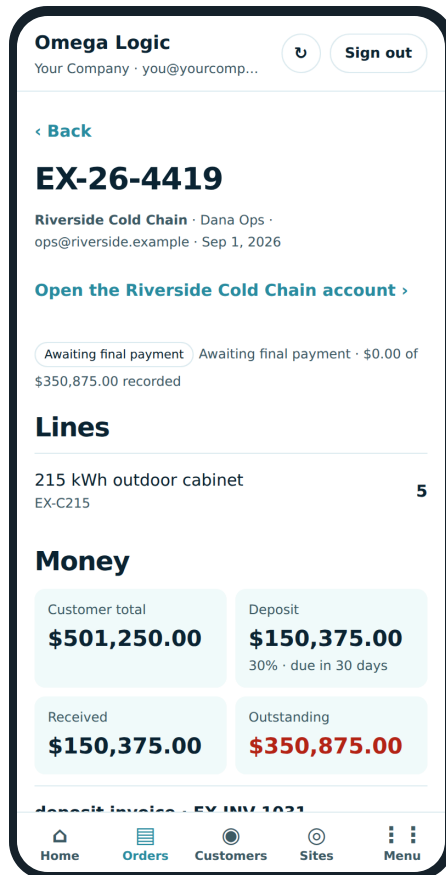


Orders

Every order with its customer, stage, total and balance. Open one for its lines, money, build, shipment and the customer's requests (type the answer, **Answer & close**). Invoicing on your own paper? Mark each invoice **Issued** and **Received** here; corrections: Accounting (page 12).

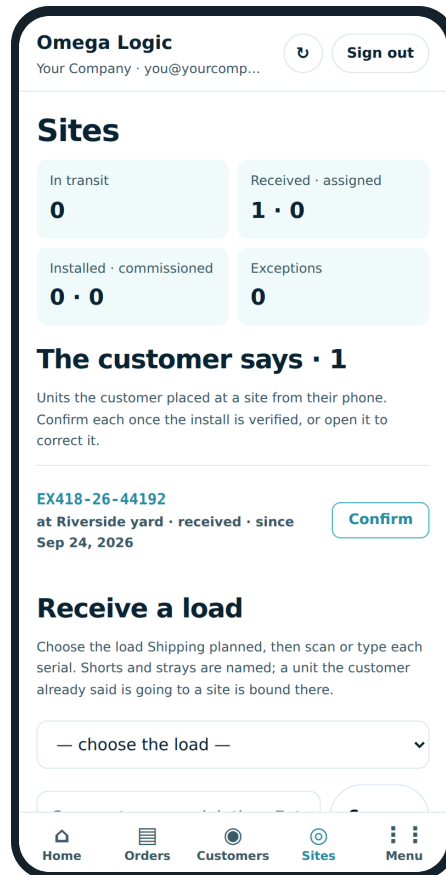

Sites

The customer says: each unit your customer placed at a site; **Confirm** it once checked. **Receive a load:** pick the load, then scan or type each serial (**Camera** reads the label, page 10). **Unit passport:** a serial, then **Open** or **Camera**: where it is, its warranty, its history.

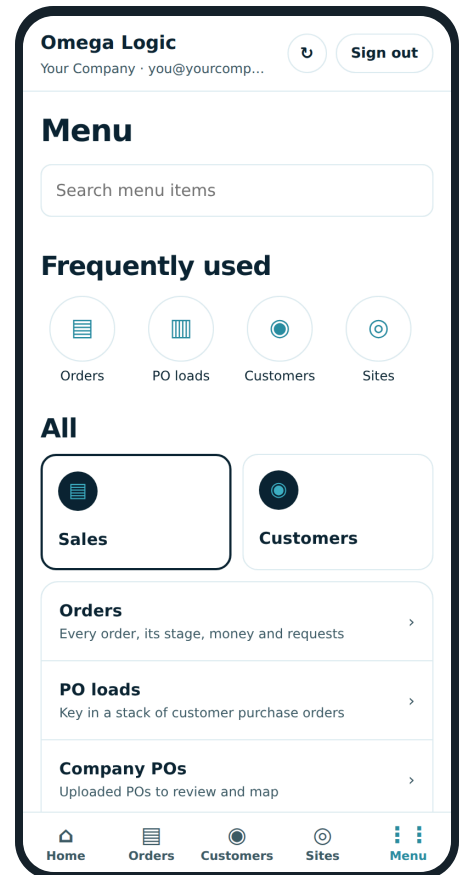

Menu

Every screen in one place, with a search box. The ones you use most are along the top. Then one panel per hub, **Setup** (products, Team, settings) and **Help & guides**, where this guide lives.

What stays on the desktop, on purpose

Approving a price and accepting an order (page 13), correcting a payment in Accounting (page 12) and placing a customer's list of sites (page 11) happen in the desktop office (silmarillion.clearskyomega.com /omega-logic, page 5), next to the paperwork. Recording a shipment and settling a wire stay with ClearSky. The app shows every result the moment it's saved.




Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA


DELIVER · SITES

Scan a label with the camera

No scanner gun needed. On the **Sites** tab, every box that takes a serial has a **Camera** button: point the phone at the unit's label and it reads it. QR, Data Matrix and Code 128 labels, on an iPhone as well as on Android.

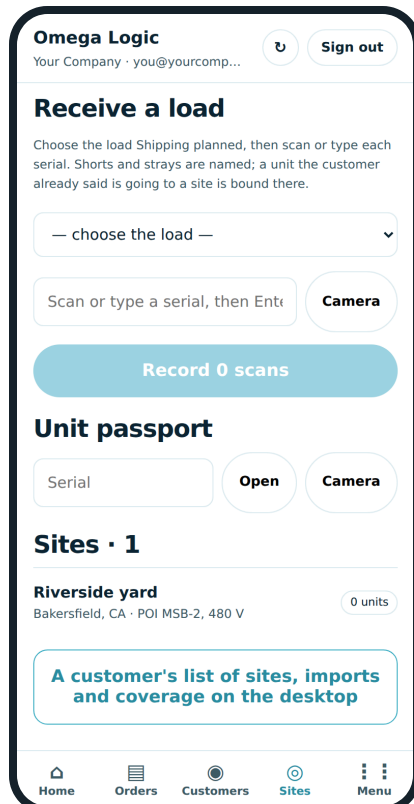

Sites. A Camera beside each box.

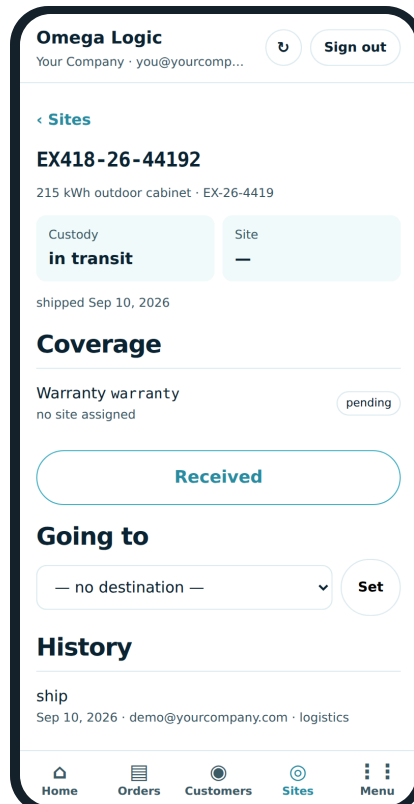

The passport a label opened.

1

Receive a load. Choose the load Shipping planned. Tap **Camera** and point it at each unit's label: each read joins the list. A scanner gun, or typing the serial and Enter, works too.

2

Tap **Record ... scans**. Shorts and strays are named; a unit the customer said is going to a site is bound there.

3

Unit passport. Type a serial and tap **Open**, or tap **Camera** and point it at the label: the passport opens by itself.

The first time: allow the camera

The phone asks to use the camera: tap **Allow**. Tapped **Don't Allow**? On an iPhone open **Settings** → **Apps** → **Safari** → **Camera** and choose Allow or Ask (older iOS: Settings → Safari → Camera), then tap Camera again. On Android, tap the icon left of the address and allow the camera.

If it doesn't read

"The camera is busy": close the other app using it. A label that won't read (torn, dirty, glare): type the serial. **Close** shuts the camera. The desktop's **Sites & custody** page has the same Camera in its scan session.



Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA

DELIVER · ON THE DESKTOP

A customer's list of sites

A PO for many sites often comes with the addresses in an email or a spreadsheet. Paste it once: every address becomes a site on the customer's account, and the order's units are spread over them. On the desktop: **Sites & custody** → **Many sites at once**. From the app: **Sites**, then the button at the foot of the tab,

A customer's list of sites, imports and coverage on the desktop.

1 · Paste the list

One address per line, *Street, City, ST ZIP*, as it came in the email. Bullets and numbering are fine. To name a site, put the name first with a colon: *Store 12: 100 Main St, ...*. To set its units, add a count at the end: *x4* or *(4 units)*. A sheet with a header row also works (name, address, city, state, zip, units, store #).

The customer's list

- 410 Example Ave, Fairview, NJ 07022
- 77 Sample Plaza Suite 12, Springfield, IL 62704 x2
- Store 12: 1200 Demo Pkwy, Madison, WI 53703
- 55 Fictional Way, Portland, ME 04101

Thanks,
Dana

Or choose a file (.csv, .tsv, .txt)

No file chosen

2 · Check the sites, then create them

4 read (one address per line) · 4 new · 0 already on the account

▶ 3 lines left out

LINE	SITE NAME	ADDRESS	UNITS	STATUS
☒ 3	Fairview, NJ	410 Example Ave, Fairview, NJ 07022	—	NEW
☒ 4	Springfield, IL	77 Sample Plaza Suite 12, Springfield, IL 62704	2	NEW
☒ 5	Store 12	1200 Demo Pkwy, Madison, WI 53703	—	NEW
☒ 5	Portland, ME	55 Fictional Way, Portland, ME 04101	—	NEW

3 · Assign the order's units

Tick the sites the order goes to and enter how many units each one takes. A blank box takes an even share of the rest (the grey number), and when the units don't divide evenly the first sites get one extra. Preview lists the serials for each site before anything is saved.

Order

EX-26-4419 - PO RCC-2200 · 3 units · 3 can be sent to a site · 2 being built

☐ Every site on this account

SITE	THERE NOW	UNITS
☒ Fairview, NJ 410 Example Ave, Fairview, NJ 07022	—	1
☒ Springfield, IL 77 Sample Plaza Suite 12, Springfield, IL 62704	—	2
☒ Store 12 1200 Demo Pkwy, Madison, WI 53703	—	0
☒ Portland, ME 55 Fictional Way, Portland, ME 04101	—	0
☐ Riverside yard 1200 Depot Rd, Bakersfield, CA 93307	—	

3 of 3 units that can be sent to a site, over 4 sites.

☐ Also move units that are already going to a site not ticked here

3 units to 2 sites · 3 new · 0 moved from another site · 0 already going there

SITE	ASKED	GOING THERE	SERIALS
Fairview, NJ	even share	1	▶ 1 serial
Springfield, IL	2	2	▶ 2 serials
Store 12	even share	0	—
Portland, ME	even share	0	—

Steps 1 and 2: paste the list, check each line.

Step 3: the order's units, site by site, before anything is saved.

- Choose the customer account, then paste the list** as it came: one address per line, *Street, City, ST ZIP*; a name before a colon (*Store 12: 100 Main St, ...*); a count at the end (*x4*). Or choose a .csv, .tsv or .txt file. Tap **Preview the list**.
- Check each line.** Fix a site's name; untick a line that is not a site (a signature starts unticked); greetings are left out. **Create sites** makes only the new ones.
- Send the order's units.** Choose the order and tick its sites; type a number where the list gave none (a blank takes an even share). **Preview** lists the serials per site, lowest first; **Assign** saves it. Each unit is then *going to* its site, and receiving it binds it there. **Download CSV**: one row per unit, with its site's address.

Your customer can do the same in their app: **Fleet** → **Sites from a list**. Nothing is saved until Create or Assign; the preview is the confirmation.




Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA


MONEY · ON THE DESKTOP

Accounting: is the money in?

For the orders your company invoices itself. In the desktop office, **Money** → **Accounting** (or **Correct or void in Accounting** on an order): every invoice, what has really been received, what is late. Your owner or an administrator makes the changes; each keeps who, when and why.

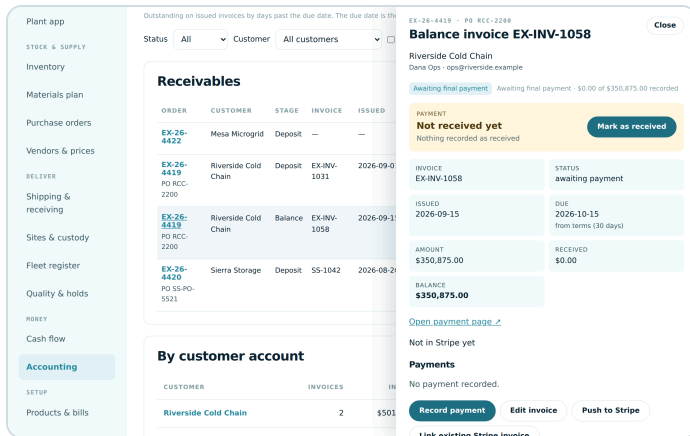

Tap an order: its invoice opens, **Payment** on top.

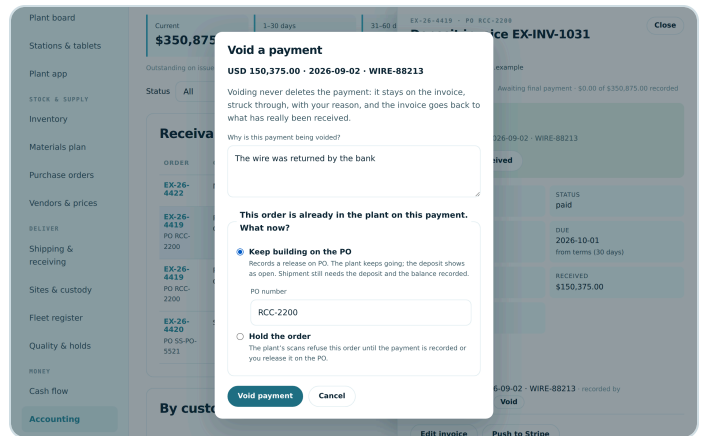

Mark as not received on a deposit in the plant.

The Payment box, and the buttons under it

Mark as received

The money has landed. It opens **Record payment** with the balance filled in: check the amount and the day it arrived, type the bank's reference (ACH or wire), then **Record payment**. The box turns green: **Received**. That is what accounting has seen, not bank clearance.

Mark as not received

The money never came, or came back. Say why, then **Void payment**. Voiding keeps it: the payment stays on the invoice, struck through, with who, when and why, and the invoice goes back to what was really received. Several payments: **Last payment not received**, or **Void** on one.

Keep building on the PO, or Hold

Asked when the plant is already building on that payment. **Keep building on the PO** records a release on the customer's PO: the plant carries on, the deposit shows as open. **Hold the order**: the plant's scans refuse it until the payment is recorded or it is released on the PO. Shipping still needs the money either way.

Record payment

Any amount, for a part payment; more than the invoice is refused. A voided reference is recorded again only if you tick that the money really landed and say why.

Edit invoice

Its number, date and due date, with a reason (clear the due date to follow the order's terms). Amounts come from the approved price and are never edited.

Also here

Record invoice issued, **Release on PO**, filters, aging, **Export CSV**. An order billed through ClearSky's QuickBooks is shown only: it reconciles there. In the app, an order's Money marks **Issued** and **Received** (page 9).



Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA

OWNERS AND ADMINISTRATORS · ON THE DESKTOP

Price & accept, and your team

The screenshot shows the 'Orders' section of the app. It lists several orders with their status: 'EX-26-4419' is 'Awaiting final payment' (customer request), 'EX-26-4420' is 'In production', 'EX-26-4422' is 'Awaiting deposit', and 'EX-26-4421' is 'Awaiting price'. The 'Awaiting price' order is highlighted. To the right, the 'Harbor Charging' order details are shown, including a 'Billed to Purchasing' note, a '20 x 215 kWh' quantity, and a '202500' price. There are buttons for 'Approve price & accept order' and 'Approve price only'.

An order waiting for its price.

Price & accept

Who: on an order your company bills itself, its **owner** or **an administrator**; on one billed through ClearSky's QuickBooks, **ClearSky**. Anyone else sees who it is waiting on.

1. **Orders**, the order (in the app: Menu → Sales → **Price & accept**).
2. Type the approved customer total: the selling price, not your cost.
3. **Approve price & accept order** (it shows the amount first), or **Approve price only** and **Accept order** later. The price locks; the order says who approved and accepted it, and when.

The screenshot shows the 'Team' management section of the app. It includes a sidebar with navigation options like 'Dashboard', 'Orders', 'Company POs', 'Customers', 'Office app', 'BUILD', 'Work order board', 'Work orders & registration', 'Plant board', 'Stations & tablets', 'Plant app', 'STOCK & SUPPLY', 'Inventory', 'Materials plan', 'Purchase orders', 'Vendors & prices', and 'BELTVER'. The main content area shows a list of team members: 'Jordan Lee' (Member), 'Sam Rep' (Owner), 'Dee Office' (Administrator), and 'Marco Bench' (Member). Each member has a row with their name, email, role, and a 'Disable' button.

Setup → Team.

Team: your office and plant staff

Desktop: **Setup** → **Team**; in the app, Menu → Setup → **Team** . Owners and administrators change it; everyone else sees the list.

- **Add a person:** their work email at your company's domain, a name, a role, **Add to the team** . They are emailed a link to set a password.
- **Change a role** on their row; it asks first.
- **Disable** someone who left: no more office, plant app or orders. Nothing is deleted; **Enable** brings them back.

Owner	Everything, including making or changing owners. The last active owner can't be disabled or changed.
Administrator	Prices and accepts what your company bills itself, records invoices and payments, runs plant and stock, adds and disables people up to administrator.
Member	Orders, customers, company POs, stock and the benches. No prices, money or people.
Viewer	Sees the workspace, changes nothing.

Your own role is changed by another owner or administrator. Someone from another company needs ClearSky to give them access first. Every change is under **Recent changes**, with who made it.



Omega Logic on your phone


The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA

YOUR CUSTOMERS

Your customers' app

Your customers don't get Omega Logic. They get **your company's app**, with your name and your icon, and everything they do in it lands in your Customers hub.

- **First, their email domain: Customers**, the company, **Overview**. Type their **Company email domain** (like theircompany.com) and **Save**: colleagues who sign in from it then ask to join this account instead of opening an empty one of their own.
- **Then send it:** under **Their app**, **Send the app link** opens your phone's share sheet, so you can text or email it; **Desktop link** is for a computer. Under People, **Invite** emails one person the link (**Share app link** when your workspace sends no invitation email).
- **They install it the same way** you did: Safari, the menu or Share, Add to Home Screen on an iPhone; Chrome, ⋮, Install on Android.
- **In it they can** size and design a site, send or upload POs, pay invoices, follow shipping, and record where each unit went, with its warranty.
- **You see it all:** a PO becomes an order waiting for a price, a question shows on Today, a document lands in Documents.

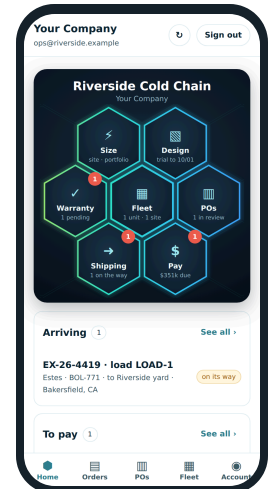

Their app wears **your** name.

Their guide: **Menu** → **Help & guides** → **Customer app guide**. Send it with the link.

If something looks wrong

No Add to Home Screen, no Install	The link opened inside another app (Gmail, Outlook, Teams...) or a Private tab: open it in Safari on an iPhone, Chrome on Android. iPhone: swipe up on the share sheet, or Edit Actions at its foot.
The icon is a letter or an old picture	Remove it (below) and add it again from Safari, or install it again from Chrome.
It looks out of date	Updates arrive when it opens online. Close it fully and reopen it, or tap 🔄 .
No signal	A bar says you're offline: what is on screen was loaded before and may be out of date, and nothing can be saved. Reconnect and tap 🔄 .
"No workspace at..."	The wrong account, or nobody has added you on Team yet: page 6.
A button says no	The message says why (a unit can't be commissioned before it is received, say): do the earlier step first.
Removing it	iPhone: touch and hold the icon, Delete Bookmark (or Remove App), Delete . Android: touch and hold, Uninstall . Chrome or Edge: the app window's menu, Uninstall Omega Logic... . Safari on a Mac: drag Omega Logic from the Applications folder in your home folder to the Trash. Your data stays in the workspace.
Still stuck	Ask your company's owner or an administrator. Then ClearSky Energy Solutions: dev@clearsky-usa.com .



Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA

The Plant app

Omega Logic on the builder's phone: work orders, every unit and its step, the bench scanner, stock, quality holds and, for a supervisor, a test result by hand.

1. What it is and where it lives

WHAT	ADDRESS	SIGN IN
Plant app	silmarillion.clearskyomega.com/plant/app?org=yourcompany.com (?org= is your company's email domain; the link your office sends already has it)	your work Google account, or your work email and password
Bench scan station	silmarillion.clearskyomega.com/plant/station.html , or Scan → Open the scanner in the app	a station credential from Work orders & registration, pasted once
Registering serials	the desktop: Work orders & registration (/plant/?org=yourcompany.com)	the same sign-in as the Omega Logic app

Nothing lives only on the phone. The app reads and writes the same work orders and unit records as the plant board and the office, through the same signed-in endpoints, so a scan at a bench is on every other screen the moment it is saved.

2. Put it on your phone and sign in

It is a web app: nothing to download from a store, and every update reaches the phone the next time it is opened. Open the address once from the link the office sends; the app remembers your company after that. Sign in with your work Google account, or your work email and password (**Forgot password?** sets one). If you work for more than one company it asks which one to open. **Sign out** also forgets the company. Your owner or an administrator adds you to the workspace on **Team**.

iPhone or iPad (Safari)

1. Open **Safari** and go to the link your office sent.
2. Tap the menu button at the left of the address bar (iOS 27) or **⋮** at the right (iOS 26), then **Share**. See a Share button (the square with the arrow)? Just tap that.
3. Swipe up on the sheet or tap **View More**, then **Add to Home Screen**.
4. Leave **Open as Web App** on and tap **Add**. No switch? Older iOS: just tap **Add**.
5. Open it from the Home Screen from now on and **sign in there once**: it keeps its own sign-in, separate from Safari. **Continue with Google** goes to Google and comes back to the app; or use your work email and password. There is no emailed link in the installed app (it would open in Safari). It opens full screen as **Omega Logic**, ClearSky's app, with your company's workspace inside.

Android (Chrome)

1. Open **Chrome** and go to the link your office sent.
2. Tap **⋮** at the right of the address bar, then **Install and create shortcut** (older Chrome: **Install app** or **Add to Home screen**).
3. Tap **Install**, not Create shortcut.
4. Open it from its icon, with your other apps, and sign in: Google, or your work email (a sign-in link by email, or **Use a password instead**).



Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA

3. The five tabs

- **Today:** open work orders, late, with holds, mine; today's scans, units that reached Ready, refusals, test fails; **needs a person** (held, stuck, failed, quiet benches, tap to open); **Scan at a bench**.
- **Work:** every open work order, late first, with All / Mine / Late / Holds / Ready filters. Tap one: stage, target, built %, ready units, holds, next operation, what it is **short of**, every unit with its bench and step progress.
- **Scan:** **Open the scanner** for the bench screen (below). Paired once as a **roaming phone**, you pick the bench you are at on each scan. **Find a unit** looks up any serial.
- **Stock:** finished units by product (on the shelf, on orders, being built for stock, held), counted over every unit; the parts short for the open work; and the **parts no bench issues**, which come off the shelf when a unit reaches Ready.
- **Quality:** units on hold. Open one to place a hold with the reason, or release it with the disposition (the owner or an administrator; everyone else sees who can). A hold stops every scan on that unit until it is released. Once a unit has shipped, its record shows **After the plant:** where it is now, which site it went to, and a link to its custody passport.

The bench: scan, type or use the camera

1. In the app, **Scan** → **Open the scanner**. A roaming phone picks the bench you are at, top right. (Not paired yet? See section 7.)
2. Scan the unit's label with a scanner gun, or tap **Use camera** and point the phone at it (QR, Data Matrix or Code 128; the first time, tap **Allow**). A damaged label, or no scanner: tap **Type a serial**, type it, tap **Go** (or Enter).
3. The screen shows this bench's steps for the unit, with each part and quantity. Scan a part's label or type its code, or tap **Issue**, to take it off stock and onto the unit; a lot number travels with it. A check step gets **Done**.
4. When every step is done the bench names the next one. The next bench refuses the unit while anything here is still open, and says what.

Scans queue when the yard has no signal and send when it returns. ◀ **Plant app**, top left, takes you back. **unpair** asks first: the token is shown only once.

Omega Logic
Your Company · Plant · you@yourcompany.com
Sign out

Back
EX-26-4419
On hold · due 2026-11-14 · North line

Built
63%
38 of 60 steps

Ready to ship
3 / 5

On hold
1

Next up
Rack assembly · 2

Kitting
Module build · 1
Rack assembly · 2
Enclosure

Short of

LFP cell 280 Ah
EX-CELL-280 · on hand 500 · on order 1896 ea · late
1000

Single-bay enclosure
EX-ENC-1B · on hand 0 · on order 0
5 ea

Master BMS
5 ea

Today
Work
Scan
Stock
Quality

Work order: built %, ready units, holds, what is short, every unit's step

Marco's phone
main · roaming · pick the bench per scan

Rack assembly
online
unpair

Ready
Scan a unit at Rack assembly

Scan a unit or a part

EX418-26-44195
Go
x

Sample plant: the cabinet on the line is EX418-26-44195, at Rack assembly. Tap "Type a serial" and type it; then scan or type the part codes EX-MOD-52 and EX-HARN to issue them.

Close typing
Use camera

Type a serial: for a label that will not scan

Marco's phone
main · roaming · pick the bench per scan

Rack assembly
online
unpair

EX418-26-44195
Already at Rack assembly.
nothing changed

Scan a unit or a part

Type the serial
Go
x

EX418-26-44195 · 215 kWh outdoor cabinet
order EX-26-4419 · 0 of 3 steps done

1 1 · Fit modules now
5.2 kWh module
EX-MOD-52
EX418-26-441
Close typing
Use camera

The unit at this bench: its steps and parts



Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA

4. A test result by hand (supervisor)

The **EOL test rig** records its result on its own, and that stays the normal way. When the rig cannot (it is down, or not connected yet), the workspace's **owner or an administrator** records the result by hand. Everyone else sees who can.

1. Open the unit: **Scan** → **Find a unit**, or tap it on a work order. The **Test result** box shows when the unit is at the bench just before the test, or at the test.
2. Choose **Pass** or **Fail**.
3. Write what was tested, and with what (at least 5 characters): *"Insulation 520 MΩ on the bench meter; tester offline"*.
4. For a fail, a **failure code**: letters, digits, dot, dash or underscore (a space becomes an underscore: *low insulation* is `LOW_INSULATION`).
5. Tap **Record the result by hand**.

What it keeps, and what it never does. The result is the unit's test evidence, marked by **hand**, with your name, the time and your note, and it is audited. It goes through the same gate as the rig: a pass, by hand or by the rig, never takes a unit past a step still open at the bench it is leaving; the app says which step. A fail holds the unit (*Test failed (recorded by hand)*) until a passing retest. The same form is on the unit's serial record on the desktop.

Test result

The test rig records EOL test on its own. When it cannot, a supervisor records the result by hand with what was tested; it is kept as test evidence with your name, and the unit still cannot pass a step that is open.

☒ **Pass**

☐ **Fail**

What was tested, and with what

Insulation 520 MOhm and pack voltage on the bench meter; the EOL rig is offline

Failure code (for a fail: letters, digits, dot, dash or underscore)

e.g. CELL_LOW

Record the result by hand

Quality

A hold stops every scan on this unit until the workspace owner or an administrator releases it with a disposition. A failed test still needs a passing retest.

Why this unit is being held

Today Work Scan Stock Quality

Record the result by hand: Pass or Fail, what was tested

5. Registering serials (desktop)

Serials are the real ones off the labels, registered against the work order they are built for: on the desktop, **Work orders & registration** → **Register serials** (a work order's own + **Register serials** opens it with that order chosen).

▼ Register serials

Register the real serials against the work order they are built for. Paste them one per line (a column from the label sheet), or scan one label after another into the box. A component (a module in a cabinet) goes in with its parent, in the same batch. Up to 400 at a time. Tests are recorded by the paired EOL rig, never by this form.

Work order

EX-26-4419 · 5 of 5 EX-C215 still to register

SKU

EX-C215

Type

cabinet

Supplier / lot (optional)

Serials — one per line

EX418-26-00001
EX418-26-00002
EX418-26-00003

Add these serials 3 added.

► A component under a parent

This batch · 3 units

EX418-26-44196 EX-C215 · cabinet shipping unit x

EX418-26-44197 EX-C215 · cabinet shipping unit x

EX418-26-44198 EX-C215 · cabinet shipping unit x

Register 3 serials Clear the batch

Register serials: the work order chosen, the serials pasted one per line, the batch as rows



Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA

1. Choose the **work order**. While an order is waiting for serials nothing is chosen for you; **finished stock** is there to choose on purpose.
2. Check the **SKU** (filled in from the order) and the type.
3. **Paste** the serials, one per line (a column from the label sheet), or scan one label after another into the box. Tap **Add these serials**. A component (a module in a cabinet): **A component under a parent**; Enter adds it and clears the box for the next scan.
4. Check **This batch**: one row per serial; **X** takes a row out. Then **Register**.

Typed one wrong? Open its record (**Find serial record**). Until the floor has scanned it, the owner or an administrator can **correct** it (type the right serial: it takes the place, components and all) or **void** it (leave that blank: its place is freed), with a reason. The mistake is kept, marked void, and refused at every bench.

6. How it links to the main system

1. The office's owner or an administrator accepts an order on the desktop (ClearSky, for an order billed through ClearSky's QuickBooks); when the deposit is paid it is released and a **work order** exists. It appears on the Plant app's Today and Work tabs.
2. Serials are registered against it (section 5). The builders build bench by bench with the scanner, issuing parts as they go; parts no bench issues come off the shelf when the unit reaches Ready. The materials plan nets what was issued; Stock shows what is short.
3. A unit that passes its test and reaches **Ready** is finished stock. The office assigns it to an order from the Omega Logic app, or the plant built it for one already.
4. ClearSky records the shipment on the desktop. From then on the unit's custody chain starts: in transit, received, assigned to the customer's site, commissioned. The Plant app shows that under **After the plant** on the unit, and the customer sees it on their phone.
5. Every unit's full record (plant trace, tests, scans, custody chain, warranty) is one passport on the desktop: silmarillion.clearskyomega.com/logic-custody?org=yourcompany.com.

Your apps. Today in the Plant app links to the Omega Logic app and the bench. One account, one record: what you build here is what the office ships and the customer places at a site.

The screenshot shows the Omega Logic app interface. At the top, it says "Omega Logic" and "Your Company - Plant - you@yourcompany.com". Below that is a "Back" button and a "Sign out" button. The main section displays the unit ID "EX418-26-44194" and the cabinet "EX-C215 EX-26-4419". A red banner indicates "On hold: NCR-26-89". Below this are tabs for "Kitting", "Module build", "Rack assembly" (selected), "Enclosure", and "EI". The "Rack assembly" tab shows "At Rack assembly since 2026-09-20 02:00" and "Next bench Enclosure". It also shows "Last test" and "Work order EX-26-4419". A section titled "Steps at Rack assembly" shows "Done 1 / 3" and "Still open 2 · Harness · Torque busbars". Below that is "Parts issued" and "Rack assembly: 2 x EX-MOD-52". At the bottom, there are icons for "Today", "Work", "Scan", "Stock", and "Quality". A note at the bottom says "A unit: where it is at the plant, steps, scans, quality".

7. If something looks wrong

- **"Open the app once from your office link so it knows your workspace"**: open the link your office sent once (it ends in ?org= and your company's email domain).
- **"No workspace at..." after sign-in**: your email is not on the workspace yet. Ask your owner or an administrator to add you on Team.
- **Stale or offline**: close the app fully and open it again (updates arrive on the next open). Offline, it says so at the top; the bench keeps its scans and sends them when the signal returns.
- **The bench says it is not paired**: a plant administrator creates a **Roaming phone** credential on the desktop (Work orders & registration → Pair a scanner or EOL rig); paste its station ID and token once on the bench screen (the token is shown only once).
- **The camera does not open**: allow it (iPhone: Settings → Apps → Safari → Camera) and tap Use camera again, or tap Type a serial.
- **Questions**: your workspace owner or an administrator, then ClearSky Energy Solutions, dev@clearsky-usa.com. The office's guide is in the Omega Logic app under Menu → Help & guides.



Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA

Your account on your phone

Your company's account with your supplier: site plans in Editor Lite, the account's orders with their milestone and warranty, purchase orders, and Fleet — your sites, where each unit is going, when it arrived, which site it runs at. Everyone at your company on the account sees the same.

1. What it is and where it lives

WHAT	ADDRESS	SIGN IN
The app	the link your supplier sent you (it ends in /portals/customer/app?org=...)	your work email (an emailed sign-in link, or a password) or Google
The same account on a computer	the desktop link your supplier sent (/portals/customer/?org=...)	the same sign-in

The app wears your supplier's name and icon. What you do in it — a purchase order, a question on an order, where a battery is going — is what your supplier sees the moment it is saved.

2. Put it on your phone and sign in

It is a web app: nothing to download from a store, and every update reaches the phone the next time it is opened. Open the link your supplier sent once; the app remembers your supplier after that.

iPhone or iPad (Safari)

1. Open **Safari** and go to the link.
2. Tap **...** at the end of the address bar, then **Share** (see a Share button, the square with the arrow? Tap it directly).
3. Scroll the sheet and tap **Add to Home Screen**, then **Add**.
4. Open it from the Home Screen from now on, and **sign in there**: it keeps its own sign-in, separate from Safari.

Android (Chrome)

1. Open **Chrome** and go to the link.
2. Tap the Chrome menu (**:**) and choose **Install app** or **Add to Home screen**.
3. Confirm. The app appears with your other apps, with its own icon. Open it and sign in.

Signing in

- **In the app on an iPhone Home Screen** (the picture): **Continue with Google**, or your work email and a password. There is no emailed link there: it would open in Safari, not in the app.
- **New here?** Tap **First time here? Create a password**, type your work email and a password (6 characters or more). Open the link we email to confirm the address (it may open in Safari; that is fine), then come back.
- **Signed in before with an emailed link, and no password?** Type your email and tap **Forgot password?** to set one.
- **In a browser, or on Android:** also **Email me a sign-in link**; open the email on the same phone (not there in a minute? Look in spam or junk).

Your Supplier

Sign in to Your Supplier

Your orders, deliveries, equipment and invoices with Your Supplier. New here? Use your work email: you join your company's account, or one opens for you.

On the Home Screen app an emailed sign-in link would open in Safari, not here: sign in with Google, or with your email and a password. New here? Tap "First time here? Create a password". Signed in before with an emailed link and never set a password? Type your email and tap "Forgot password?".

 **Continue with Google**

or with email

Work email

you@company.com

Password

Sign in

[Forgot password?](#)

[First time here? Create a password](#)

The sign-in in the app on an iPhone Home Screen



Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA

3. Home and the five tabs

Along the bottom: **Home** · **Orders** · **POs** · **Fleet** · **Account**.

- **Home:** your account at a glance. **Fleet** in the middle, with **Size**, **Design**, **Warranty**, **POs**, **Shipping** and **Pay** around it; a red number is where you are needed. Tap one to open it (each has < **Home** to come back). Under the hub: what is arriving and what there is to pay.
 - **Size** and **Design:** a quick size (kW and hours against your supplier's catalog) with **Lay it out** and **Send as a PO**; Site Map · Editor Lite for a site plan from an address, and every saved plan.
 - **Pay:** open invoices with your supplier's pay link. **Shipping:** loads on the way and delivered. **Warranty:** every unit's coverage.
- **Orders:** each order with its milestone (received, confirmed, building, testing, ready, shipped), lines with the warranty date, invoices with the pay link, destinations and loads, and **Request a change or ask a question**.
- **POs:** send purchase orders (section 4) and follow the ones under review.
- **Fleet:** your sites and every unit on its way to them or running at them (section 5).
- **Account:** your account number, company, rep and terms; **People on this account** (the owner adds colleagues, approves anyone who asked to join, and turns access off for someone who left); your details, documents and agreements.

Your company's account. Signing in from your company email asks to join your company's account with this supplier: its owner (or your supplier) approves you, then you see everything on it. With no account yet, the first sign-in opens one and you are its owner.

4. Purchase orders, straight from a spreadsheet

1. Tap **POs**. One line per product per PO, in this order: **PO number, SKU, qty, ship-to name, address, city, state, ZIP, requested date, notes**. The products you can order are listed under the box.
2. **Copy the rows from Excel or Google Sheets and paste them:** columns and a header row are understood (the header is skipped). Or type the lines with commas; an address with a comma in it goes in "double quotes".
3. Read the line under the box: how many POs and lines it read, or what to fix and on which line.
4. Tap **Send these purchase orders**. Each is received for pricing; nothing is charged.

One PO number is one order to one place. A PO going to several sites goes through **One PO to several sites**; a PO number with two different addresses is not sent until you fix it. A ZIP your spreadsheet shortened (2134 for 02134) gets its zero back where ZIPs start with 0.

Your Supplier
ops@riverside.example
Sign out

Riverside Cold Chain
Your Supplier

Size
site · portfolio

Design
trial to 10/01

Warranty
1 pending

Fleet
1 unit · 1 site

POs
1 in review

Shipping
1 on the way

Pay
\$351k due

Arriving 1
See all >

EX-26-4419 · load LOAD-1
Estes · BOL-771 · to Riverside yard ·
Bakersfield, CA
on its way

To pay 1
See all >

Home Orders POs Fleet Account

Home: Fleet in the middle, a red number where you are needed

Your Supplier
ops@riverside.example
Sign out

Purchase orders
Riverside Cold Chain · 40% deposit, due on receipt

Enter purchase orders
One line per product per PO: **PO number, SKU, qty, ship-to name, address, city, state, ZIP, requested date, notes**. Paste rows straight from Excel or Google Sheets (a header row is skipped), or type them with commas; an address with a comma in it goes in "double quotes". Lines with one PO number are one order to ONE place; a PO going to several sites goes through [One PO to several sites](#). Each is received for pricing; nothing is charged.

P0-1001 EX-C215 2	Store 12
1200 Demo Pkwy Madison WI	53703
2026-11-16	Dock B, call ahead
P0-1002 EX-C215 1	Fairview
410 Example Ave Fairview NJ	
07022 2026-11-20	

Products: EX-C215 (215 kWh outdoor cabinet), EX-C418 (418 kWh outdoor cabinet), INSTALL (Commissioning)
2 purchase orders, 2 lines (header row skipped)

Send these purchase orders

One PO to several sites

Home Orders POs Fleet Account

Rows pasted from a spreadsheet, read as two POs

ClearSky Energy Solutions · silmarillion.clearskyomega.com · page 20



Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA

5. Fleet: your sites and your units

Tap **Fleet** (the page is headed **Sites & equipment**). Your sites, then **Your units**: every unit shipped on your orders, with where it is and its warranty.

1. **Add a site**: where the units will be interconnected — name, address, utility, meter, point of interconnection. Once. Many at once: **Sites from a list** (below).
2. While a unit is **in transit**, choose its site under **Going to...** and tap **Set**. When it arrives, set **Arrived on** (today unless you change it) and its condition, and tap **Received**: it is placed at that site.
3. Or tap **Received** first, then choose the site under **Installed at...** and tap **Assign**. A unit already at a site shows that site, and the button reads **Move**.
4. Set **Commissioned on** and who did it, and tap **Commissioned**.
5. Each unit shows its **warranty** (from, until) and any service level. The warranty is tied to the site. Until your supplier confirms your placement it reads *awaiting your supplier's confirmation*; then *confirmed by your supplier* with the date.

The app asks before it records a date, and a date can't be in the future or before the unit shipped or arrived: that date starts the warranty. What happened shows on the unit's own card.

Your Supplier
ops@riverside.example

Sign out

Sites & equipment
Each unit shows where it is and when its warranty runs. Tell us when a unit arrives and which site it is installed at: the warranty is tied to that site.
Riverside yard
1200 Depot Rd, Bakersfield, CA, 93307
PG&E · POI MSB-2, 480 V · meter 1002233
0 units
Add a site

Your units
EX418-26-44192
215 kWh outdoor cabinet · EX-26-4419
in transit
Warranty
no site assigned
pending
Going to...
Set
Arrived on
09/24/2026
Arrived in gooc
Received

Home

Orders

POs

Fleet

Account

Fleet: your site, your unit, Going to

Your Supplier
ops@riverside.example

Sign out

Sites from a list

Warranty per unit

Shipping

Sites & equipment
Each unit shows where it is and when its warranty runs. Tell us when a unit arrives and which site it is installed at: the warranty is tied to that site.
Riverside yard
1200 Depot Rd, Bakersfield, CA, 93307
PG&E · POI MSB-2, 480 V · meter 1002233
1 unit
Add a site

Your units
EX418-26-44192
215 kWh outdoor cabinet · EX-26-4419
at Riverside yard · awaiting your supplier's confirmation
received
Warranty
until 2036-09-10 · from 2026-09-10
active
Riverside yard
Move

Home

Orders

POs

Fleet

Account

Received at the site: warranty running, awaiting confirmation



Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA

Sites from a list — many sites at once

Your PO covers many sites and you have the addresses in an email or a spreadsheet? **Fleet** → **Sites from a list**, three steps:

- **1 Paste** the list as it is: one address per line, *Street, City, ST ZIP*. Bullets and numbering are fine; greetings and sign-offs are left out. To name a site, put the name first with a colon (*North store: 2200 Lake Ave, ...*); to set its units, a count at the end ($\times 4$ or (*3 units*)). Or **upload the file** (.csv, .tsv or .txt; from Excel: Save As → CSV). Tap **Preview the sites**.
- **2 Check**: one card per line, marked new or already yours. Fix a name, untick a line that is not a site (a signature starts unticked). Tap **Create ... sites**: only the new ones are made.
- **3 Send**: choose the order, tick the sites it goes to and type how many units each takes (a blank takes an even share). **Preview** lists the serials for each site. **Send ... units to ... sites** is the confirmation: nothing else will ask. Each unit is then *going to* its site, and receiving it places it there. **Download CSV** gives you one row per unit with its site's address.

Your Supplier
ops@riverside.example Sign out

1 Paste 2 Check 3 Send

New 4 Already yours 0

To fix 0 Lines read 4

▶ 3 lines left out

✓ Line 3 new

Fairview, NJ

410 Example Ave
Fairview, NJ 07022

✓ Line 4 new

Springfield, IL

77 Sample Plaza Suite 12
Springfield, IL 62704
2 units

Home Orders POs Fleet Account

2 Check: the pasted email, one card per line

53703 units

✓ Portland, ME 0 units
55 Fictional Way, Portland, ME 04101

□ Riverside yard 0 units
1200 Depot Rd, Bakersfield, CA 93307

4 sites · 3 of the 3 units that can be sent

Preview

Preview

3 units to 2 sites · 3 new

▶ Fairview, NJ · 1 unit

▶ Springfield, IL · 2 units

▶ Store 12 · 0 units

▶ Portland, ME · 0 units

Send 3 units to 2 sites

This is the confirmation: nothing else will ask.

Home Orders POs Fleet Account

3 Send: the order's units, site by site

6. How it reaches your supplier

1. A PO anyone on the account sends from the app lands with your supplier as an order to price. Everyone on the account sees it under Orders once it is confirmed.
2. Your supplier accepts and invoices; the milestone on your order moves as their plant scans your units — nobody types a status.
3. When your units ship, each one appears under **Fleet** with its serial. You say where it is going and when it arrived; you assign it to the site it runs at; you record commissioning.
4. Your supplier sees exactly what you said and confirms it. From then on the unit's warranty and any service level are on record against that site, and a replacement under RMA carries the remaining term.
5. A question, a delivery change or a warranty claim goes in under the order (**Request a change or ask a question**); the answer comes back on the same order.

One account, one record. The app, the desktop portal and your supplier all read the same record, and so does everyone on your company's account. Nothing is stored only on the phone.

Your Supplier
ops@riverside.example Sign out

Orders

EX-26-4419 Building
2026-09-01 · your PO RCC-2200

Your units are on the line.

Received Confirmed Building Testing Ready Shipped

215 kWh outdoor cabinet 5
215 kWh

Order total \$501,250.00 Deposit 30%

Deposit invoice EX-INV-1031
\$150,375.00 · paid

Final balance invoice EX-INV-1058
\$350,875.00 · due view / pay

Ship to Riverside yard · Bakersfield, CA · 5 x EX-C215
Load LOAD-1 · on its way · Estes BOL-771 · last confirmed at Fresno, CA

Delivery address or date 2026-09-20 · ops@riverside.example · waiting for an answer

Home Orders POs Fleet Account

Orders: the milestone track, invoices, a place to ask



Omega Logic on your phone

The Omega Logic app, the Plant app and the customer app. Install them, run the work, one system. ClearSky-OMEGA

7. If something looks wrong

- **"This link is missing its supplier"**: open the app from the link your supplier sent once; the app remembers the supplier after that.
- **No emailed link in the app on an iPhone**: that is on purpose (it would open in Safari). Use Google, or your email and a password: **First time here? Create a password**, or **Forgot password?** if you have signed in before.
- **"Check your inbox" but nothing came**: wait a minute and look in spam or junk; the email comes from a no-reply address.
- **The app looks stale**: close it fully and open it again. Updates arrive on the next open.
- **Offline**: the app says so; reconnect and try again.
- **Questions**: your supplier — your account rep is on the Account tab.
- **"Your request to join ... is waiting for approval"**: your company already has an account; its owner or your supplier lets you in.
- **"Open your customer account first"**: tap Account once, or ask your company's account owner to add you.
- **A serial is "not on one of your orders"**: the unit was shipped on an order for a different company account. Ask your supplier which account it is on.
- **A date is refused**: it is in the future, or before the unit shipped or arrived. If the date your supplier recorded is wrong, ask them to correct it.
- **Editor Lite on a phone**: it opens in the browser at desktop width; it lays out best on a tablet or a desktop.