

FOTOMOKO MANUAL


For Events activation



The screenshot shows a digital display interface for AVOLUTION. At the top is the AVOLUTION logo with the tagline 'DIGITAL:POWERED BY HUMANS'. Below this is the FOTO MOKO logo, which features a camera icon. The main heading is 'Activate'. There are two input fields: one for 'Name' and one for 'Serial', both with placeholder text 'Enter text...'. Below these fields is an 'Activate' button. At the bottom, there is a message 'wrong 0: NO LICENSE'.

- **Name:** avo123
- **Serial:** avo123
- **Note:** Make sure the computer is connected to the internet for activation.

Camera

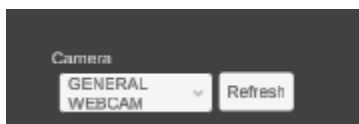

If a camera device is not detected on startup, click **Refresh**. Additionally, you can set multiple camera devices and use the dropdown to select a connected webcam.


Allow No Frame



True – Allows the option to capture without any frames.


False – All selections will include frames, and the **no frame** option will be hidden.

Camera Position




Choose from **Right**, **Middle**, or **Left** to set the camera position.

Cam Brightness

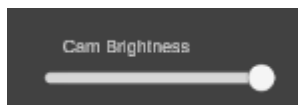


Use the slider to adjust the camera brightness.


QR Link





New Link – uses a new web UI with the option to like our Facebook page and view our products, which link directly to our website.

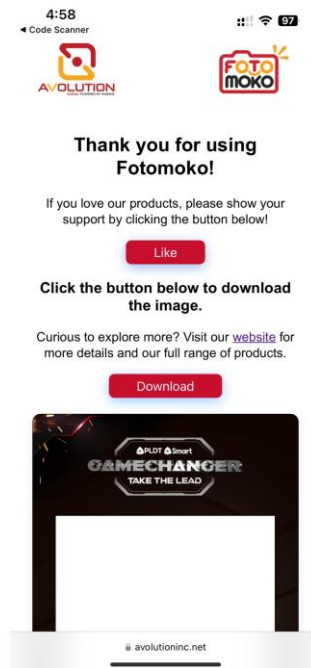

Old Link – only displays the captured image directly.

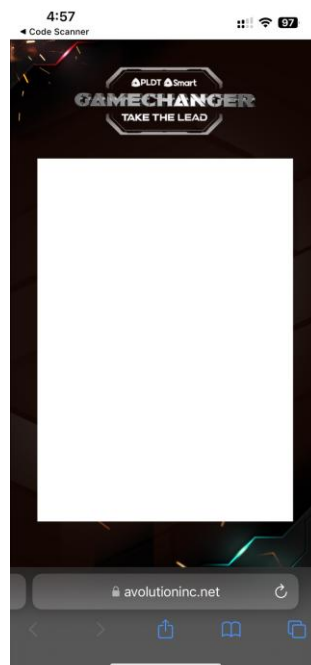

QR Link

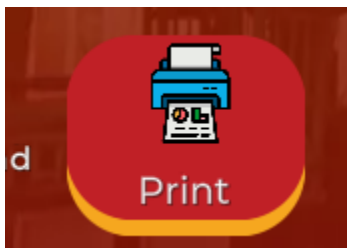


Enabled – shows the print button, allowing the captured image to be printed.

Disabled – hides the print button.

Note: Make sure to set the printer device as the default in Windows settings.


Mirror Camera



No – disables mirroring upon capture.

Yes – enables mirroring only upon capture to prevent user confusion when the camera is mirrored.

Collage



Set the collage to **1 Picture** for now, as the collage function is not yet finalized.

Folder Name (Event Name)



Provides the option to change the folder name where images are saved on the server. It is recommended not to modify this setting unless necessary to avoid potential issues.

Password

The image shows two screenshots of a web interface. The top screenshot is titled 'Password' and features a numeric keypad with buttons for digits 1 through 0, and a large 'OK' button to the right. The bottom screenshot is titled 'Upload Link' and contains a text input field with the URL 'https://avolutioninc.net/Fotomoko2/'. To the right of the input field is a 'Save' button. Below the input field, there is a section for 'Use Local IP' with an unchecked checkbox and a note: 'Note: Upon checking this toggle, the URL will be http://ipaddress/fotomoko/. Make sure XAMPP is running before proceeding.' To the right of this section is a 'Show Greenscreen' dropdown menu currently set to 'True'.


The password is **7**.

Upload Link – Modify this only if you need to change the upload link to the server.

Show Greenscreen – Currently under development and not yet finalized.

Use Local IP – Check this box to use the computer's local IP address instead of connecting to the server.

Note: When using Local IP, ensure that **XAMPP is run as an administrator and that both Apache and MySQL are running**. Also, check if **C:\xampp\htdocs\fotomoko** exists and contains the necessary files, as shown in the image below.

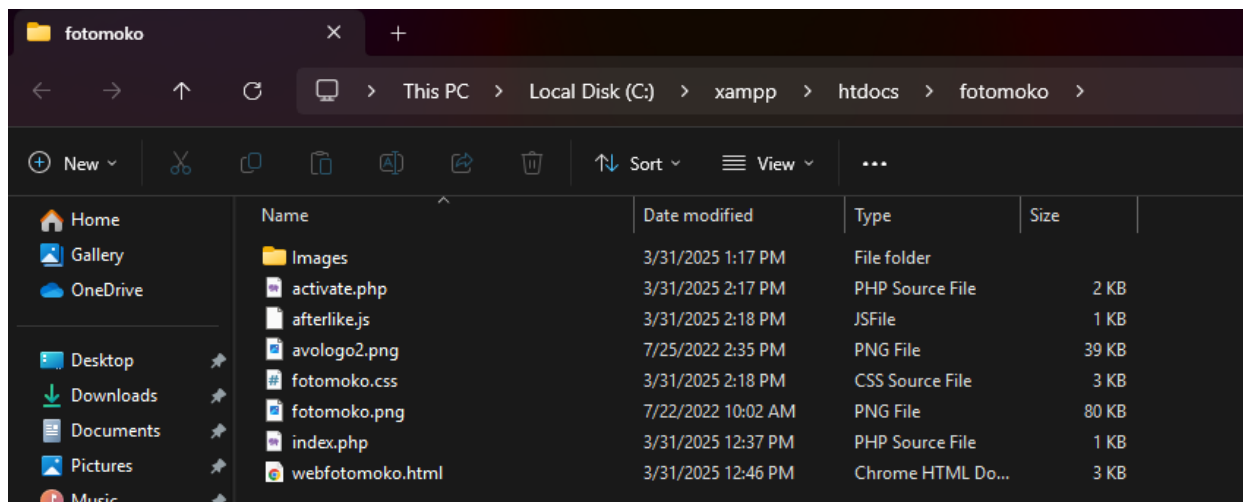

If the folder or files are not present, download them here:

<https://avolutioninc.net/fotomoko2/fotomokoxampp/>. Once downloaded, extract the ZIP file and run **fotomokolocalip.exe**.

FOTOMOKO Frame File Renamer

1. Check the **save_images_here** folder to see where the frame count ends (e.g., **frame010**).
2. Open **FotomokoFrameRenamer.exe** and enter the number that comes after the last frame count in **save_images_here** (e.g., if the last frame is **frame010**, enter **11**).
3. Press **Enter** or click the **OK** button and wait for the renaming process to complete.

Download link: <https://avolutioninc.net/fotomoko2/fotomokofilerenamer/>

