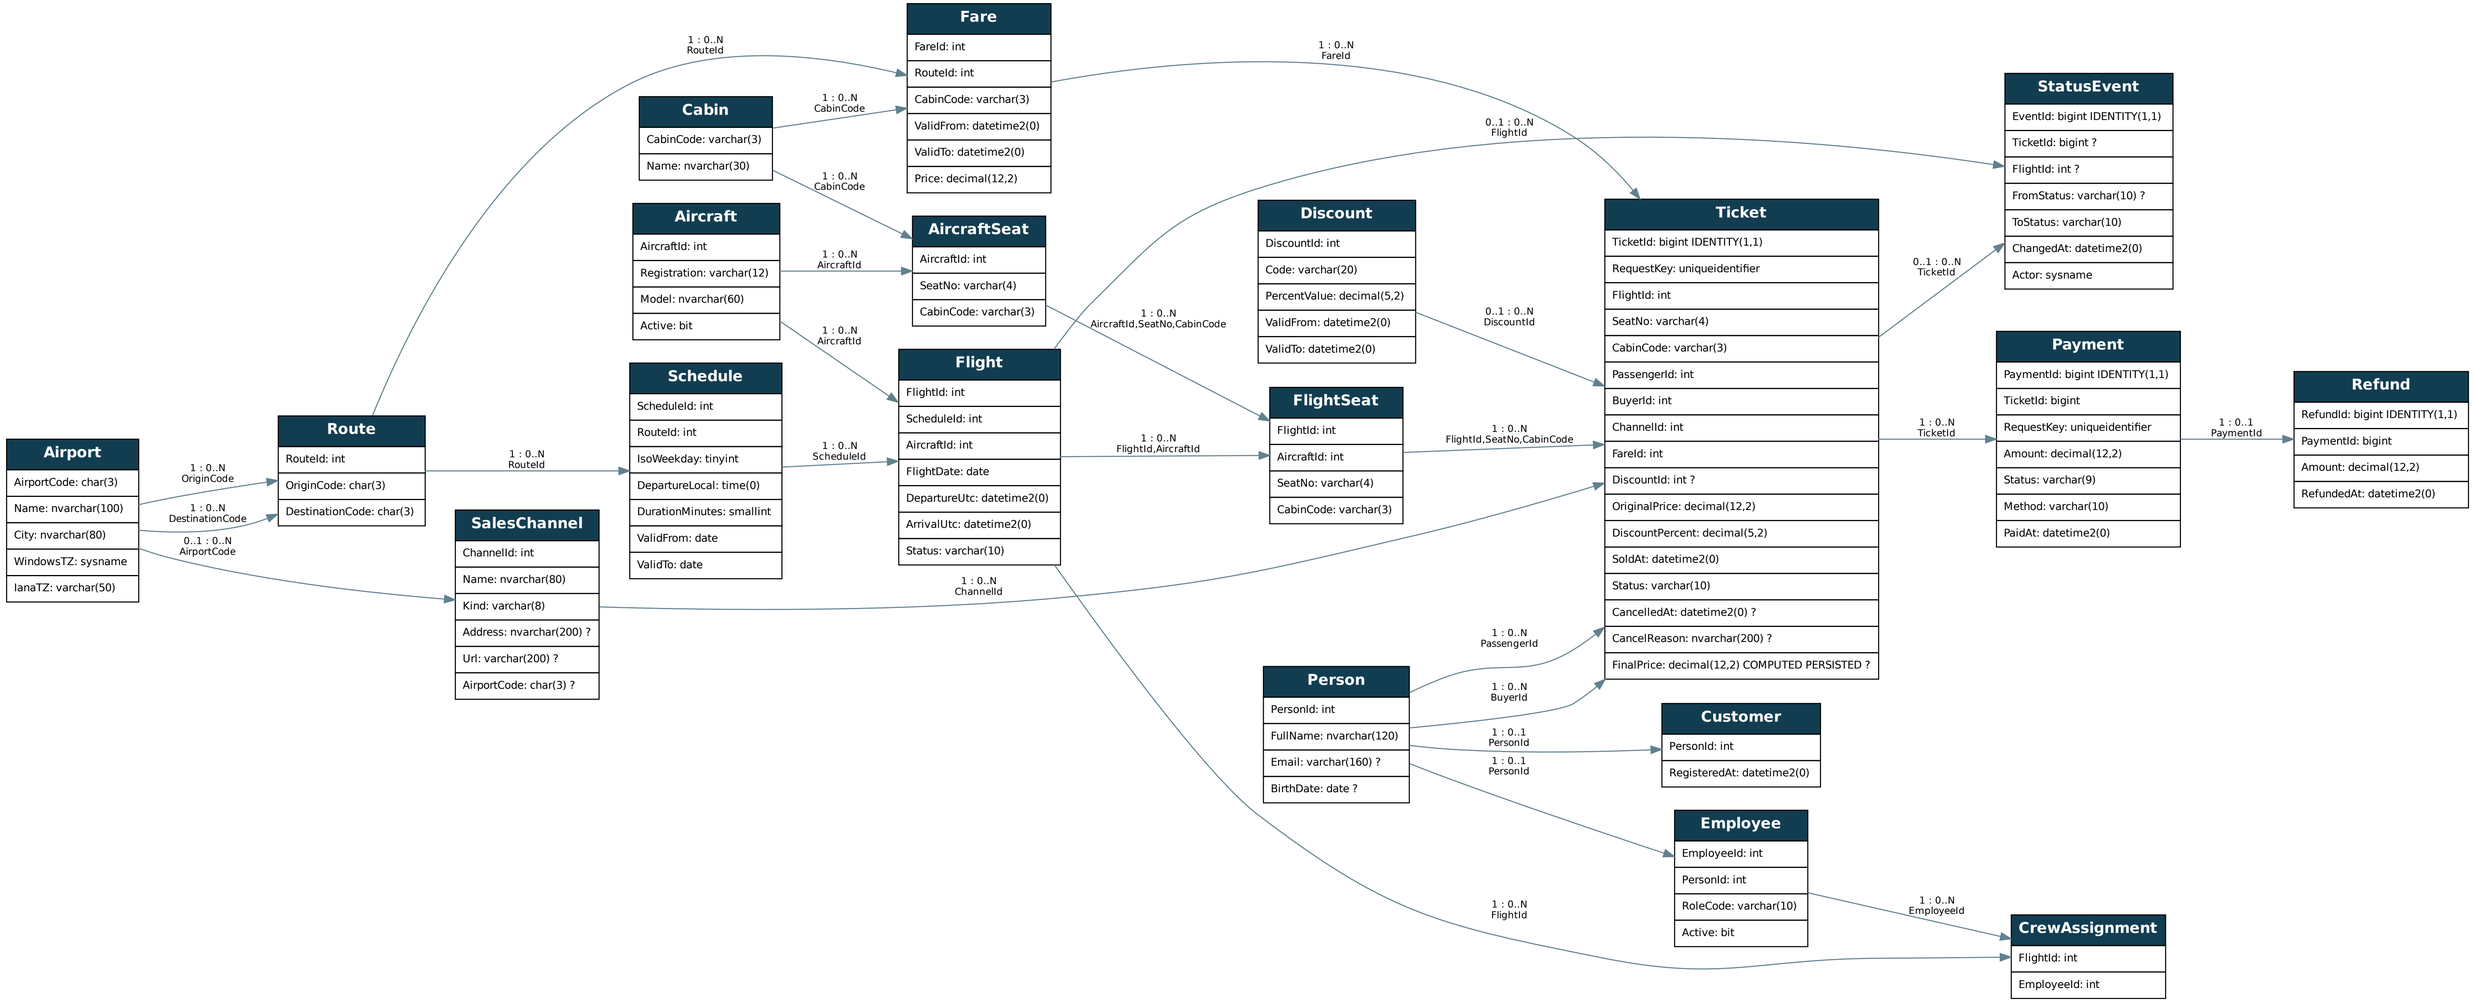
Airport
AirportCode: char(3)
Name: nvarchar(100)
City: nvarchar(80)
WindowsTZ: sysname
IanaTZ: varchar(50)
1 : 0..N OriginCode
1 : 0..N DestinationCode
0..1 : 0..N AirportCode
Route
RouteId: int
OriginCode: char(3)
DestinationCode: char(3)
1 : 0..N RouteId
Fare
FareId: int
RouteId: int
CabinCode: varchar(3)
ValidFrom: datetime2(0)
ValidTo: datetime2(0)
Price: decimal(12,2)
1 : 0..N RouteId
Cabin
CabinCode: varchar(3)
Name: nvarchar(30)
1 : 0..N CabinCode
1 : 0..N CabinCode
Aircraft
AircraftId: int
Registration: varchar(12)
Model: nvarchar(60)
Active: bit
1 : 0..N AircraftId
1 : 0..N AircraftId
AircraftSeat
AircraftId: int
SeatNo: varchar(4)
CabinCode: varchar(3)
Schedule
ScheduleId: int
RouteId: int
IsoWeekday: tinyint
DepartureLocal: time(0)
DurationMinutes: smallint
ValidFrom: date
ValidTo: date
1 : 0..N ScheduleId
Flight
FlightId: int
ScheduleId: int
AircraftId: int
FlightDate: date
DepartureUtc: datetime2(0)
ArrivalUtc: datetime2(0)
Status: varchar(10)
1 : 0..N AircraftId,SeatNo,CabinCode
1 : 0..N FlightId,AircraftId
SalesChannel
ChannelId: int
Name: nvarchar(80)
Kind: varchar(8)
Address: nvarchar(200) ?
Url: varchar(200) ?
AirportCode: char(3) ?
1 : 0..N ChannelId
Discount
DiscountId: int
Code: varchar(20)
PercentValue: decimal(5,2)
ValidFrom: datetime2(0)
ValidTo: datetime2(0)
FlightSeat
FlightId: int
AircraftId: int
SeatNo: varchar(4)
CabinCode: varchar(3)
1 : 0..N FlightId,SeatNo,CabinCode
0..1 : 0..N DiscountId
1 : 0..N FareId
0..1 : 0..N FlightId
Ticket
TicketId: bigint IDENTITY(1,1)
RequestKey: uniqueidentifier
FlightId: int
SeatNo: varchar(4)
CabinCode: varchar(3)
PassengerId: int
BuyerId: int
ChannelId: int
FareId: int
DiscountId: int ?
OriginalPrice: decimal(12,2)
DiscountPercent: decimal(5,2)
SoldAt: datetime2(0)
Status: varchar(10)
CancelledAt: datetime2(0) ?
CancelReason: nvarchar(200) ?
FinalPrice: decimal(12,2) COMPUTED PERSISTED ?
0..1 : 0..N TicketId
1 : 0..N TicketId
StatusEvent
EventId: bigint IDENTITY(1,1)
TicketId: bigint ?
FlightId: int ?
FromStatus: varchar(10) ?
ToStatus: varchar(10)
ChangedAt: datetime2(0)
Actor: sysname
Payment
PaymentId: bigint IDENTITY(1,1)
TicketId: bigint
RequestKey: uniqueidentifier
Amount: decimal(12,2)
Status: varchar(9)
Method: varchar(10)
PaidAt: datetime2(0)
1 : 0..1 PaymentId
Refund
RefundId: bigint IDENTITY(1,1)
PaymentId: bigint
Amount: decimal(12,2)
RefundedAt: datetime2(0)
Person
PersonId: int
FullName: nvarchar(120)
Email: varchar(160) ?
BirthDate: date ?
1 : 0..N PassengerId
1 : 0..N BuyerId
1 : 0..1 PersonId
1 : 0..1 PersonId
Customer
PersonId: int
RegisteredAt: datetime2(0)
Employee
EmployeeId: int
PersonId: int
RoleCode: varchar(10)
Active: bit
1 : 0..N EmployeeId
CrewAssignment
FlightId: int
EmployeeId: int
1 : 0..N FlightId