



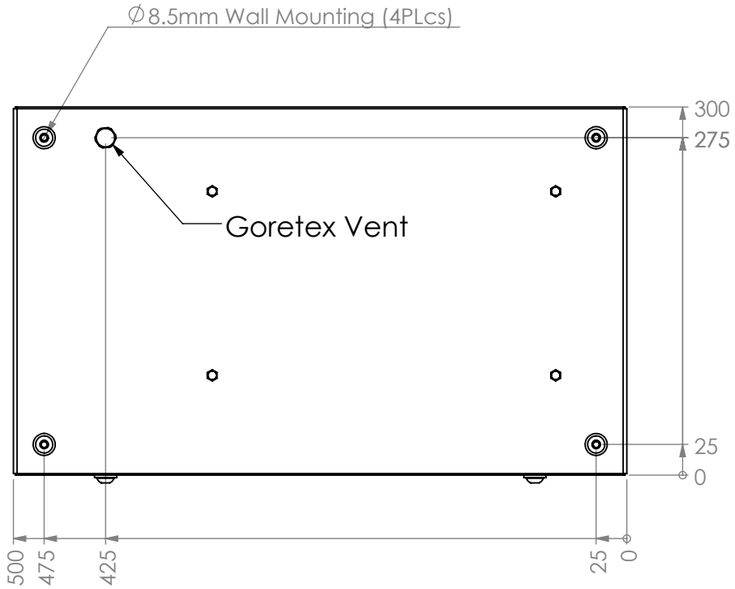



NOTE: Clearance is required behind the rear of the Comfill for the Goretex Vent when it is mounted on a Wall.

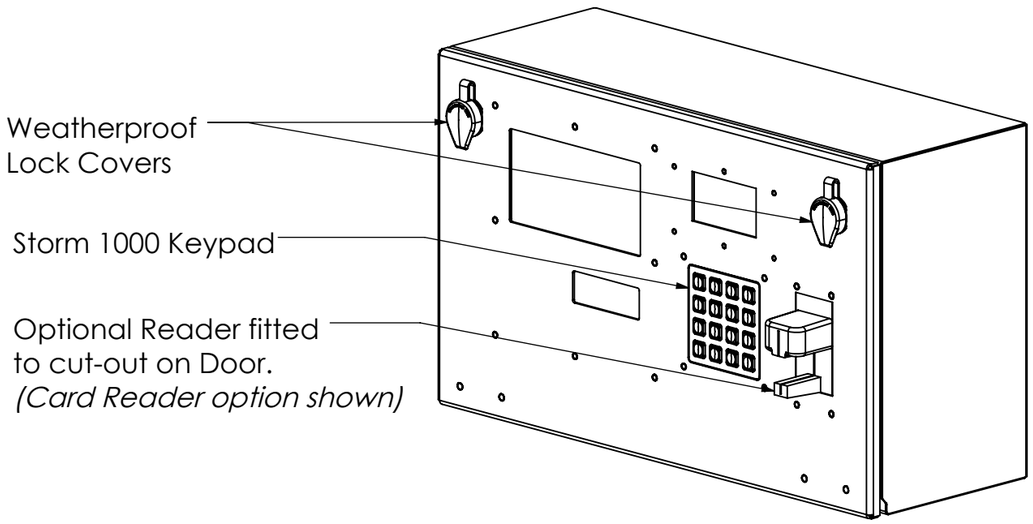


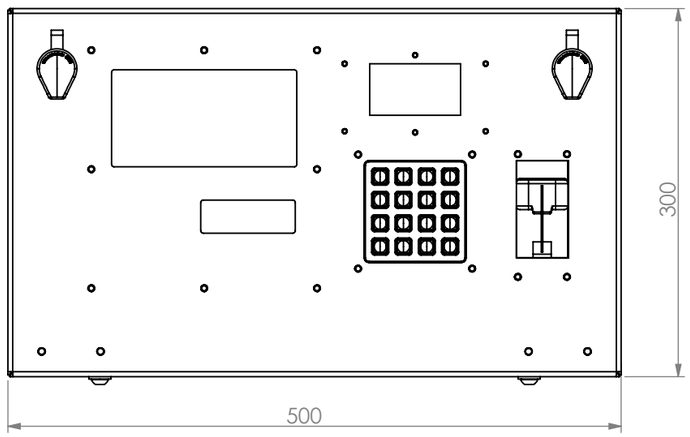

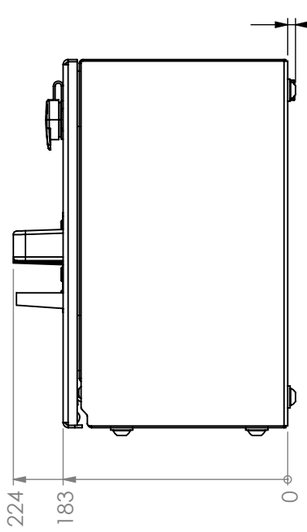

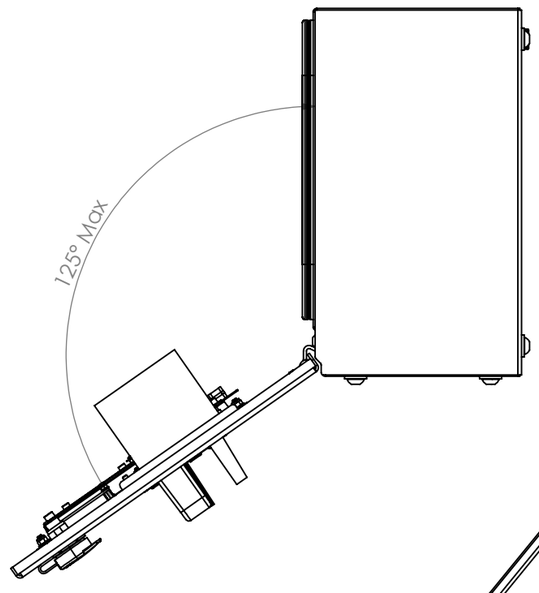

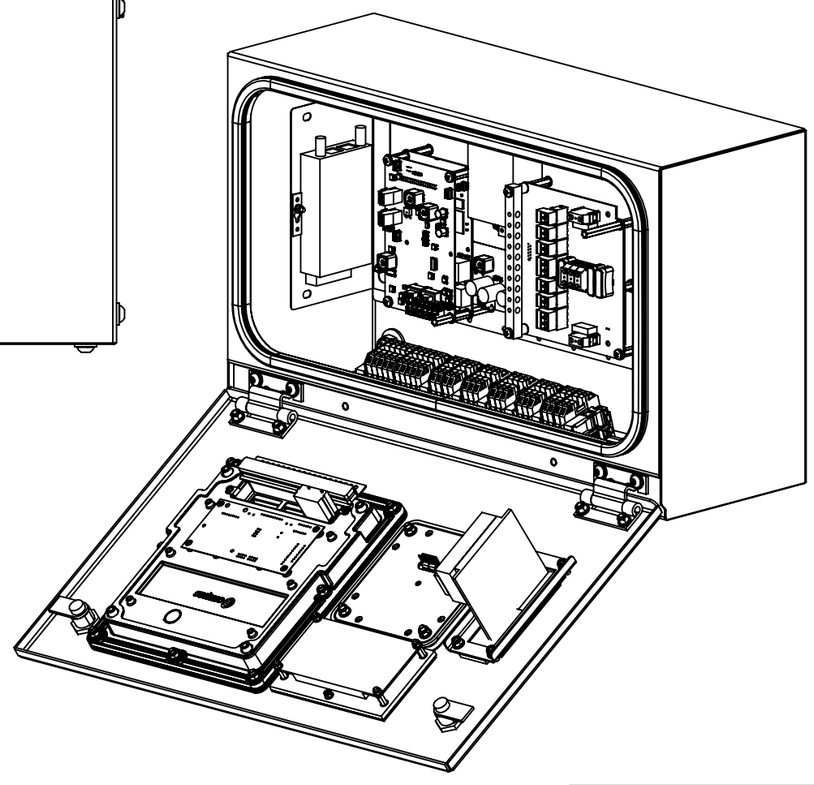

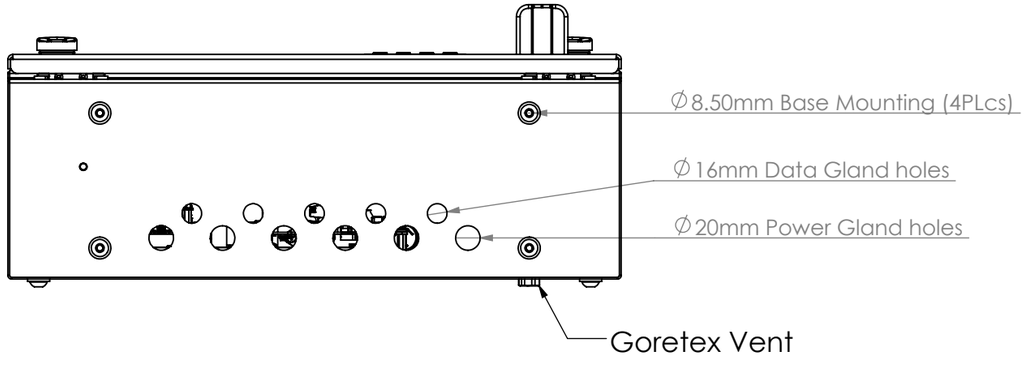

Date: 26/07/2024

Revision Description: Initial Release

© Copyright
Compac Industries Ltd
PO Box 12-417
52 Walls Road
Penrose, Auckland, NZ
Ph 649 5792094
Fax 649 5790635


General Tolerances
All dimensions millimetres


Remove all burrs and sharp edges. Original Size A3. Do not scale from drawing.

C5K Comfill
C5K Comfill V2
Basic Layout & Dimensions


Drawing	Sheet	Part Revision
ASM0088A	1/8	A

ITEM	Description	Part Number	QTY.
1	C5K Depot register Gearplate		1
2	C5K Depot register Gearplate - 4G router		1
3	B18.21.2M-Internal Tooth Lock Washers_AM4	P-BOLT-M4-SLWSS	26
4	M4x25 Brass standoff		8
5	B18.2.4.1M - Hex nut, Style 1, M4 x 0.7 --D-N	P-BOLT-M4-N-SS	13
6	Comset CM685T-W Router		1
7	M3x10 Pan Pozi screw - Stainless Steel	P-BOLT-M3X10SSP	2
8	M3 flat washer - Stainless Steel	P-BOLT-M3-FWSS	4
9	M3 Nylok Nut - Stainless Steel		2
10	M4 Nyloc Nut - Stainless Steel		2
11	B18.22M - Plain washer, 4 mm, narrow	P-BOLT-M4-FW-SS	10
12	M4x12 Brass standoff		5

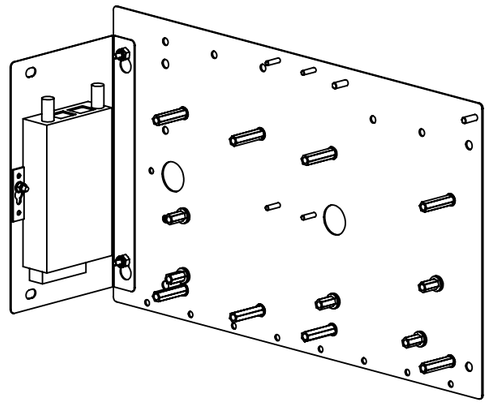


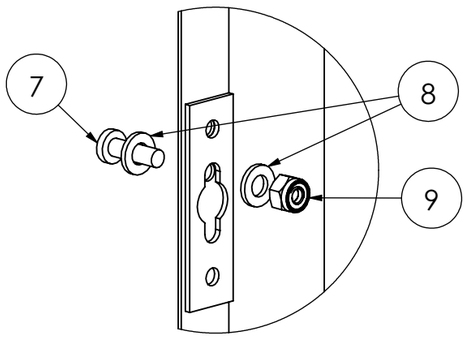


DETAIL A (Router)
SCALE 1 : 1




DETAIL B (Router GP)
SCALE 1 : 1



DETAIL C (C5K Processor and Terminal Board Mounts)
SCALE 1 : 1

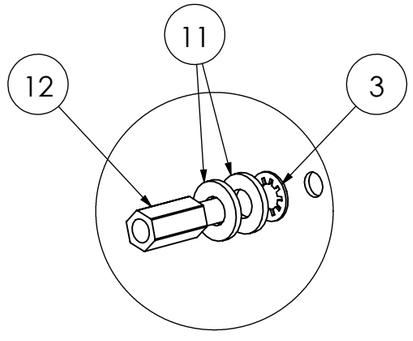

DETAIL D (Base Board Mounts)
SCALE 1 : 1

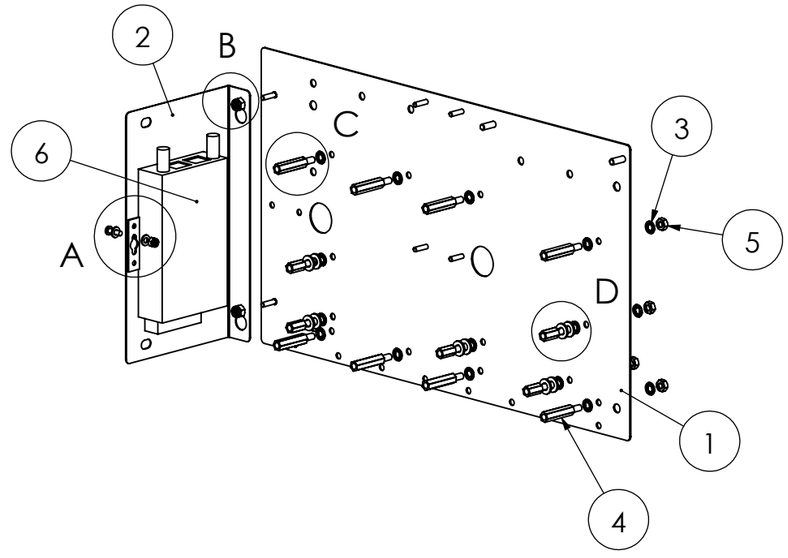

(5x)M4x12 Standoffs for spacing the 'Base Board'
(8x)M4x25 Standoffs of spacing the Processor and Terminal Boards.
All M4 Standoffs have M4 star washers fitted against the 'Front' of the gear plate, and are fastened with M4 star washers and M4 nuts on the 'Rear' of the gear plate.

Date: 26/07/2024

Revision Description: Initial Release


© Copyright
Compac Industries Ltd
PO Box 12-417
52 Walls Road
Penrose, Auckland, NZ
Ph 649 5792094
Fax 649 5790635


Remove all burrs and sharp edges. Original Size A3. Do not scale from drawing.

C5K Comfill
C5K Comfill V2
Module Gearplate Assembly


Drawing	Sheet	Part Revision
ASM0088A	**2/8**	**A**

ITEM	Description	Number	QTY.
1	12V Power Module IRM-60-12ST	BA-PWR-IRM6012ST	1
2	CI510 C5K Comfill Base Board	CP-COMFIL-BSE	1
3	CI504 C5K Terminal Board	CP-C5K-TERM	1
4	C5k Earth Bar	BC-BUSBAR-10W/C5	1
5	CI500 C5K Processor Board	CP-C5K-PROCESP	1
6	CI533B C5K Comms Driver Board	CP-C5K-CGIL485	1
7	Triac Heat Sink	BH-C4TRIAC	1
8	RD91 40 amp Triac	AT-BTA40-RD91	2
9	M3 flat washer - Stainless Steel	P-BOLT-M3-FWSS	4
10	M3 Nylok Nut - Stainless Steel	P-BOLT-M3-N-NYS	4
11	M4 internal lock washer - Stainless Steel	P-BOLT-M4-SLWSS	19
12	M4x10 Pan Pozi screw - Stainless Steel	BA-SCRM4	13
13	M4 flat washer - Stainless Steel	P-BOLT-M4-FW-SS	2
14	M4 Nyloc Nut - Stainless Steel	P-BOLT-M4-NYL-SS	6
15	M4x18 Brass M/F Standoff	BA-SPCR-BM4-18	5
16	8mm Brass round spacer	BA-SPCR-BM4-8SP	2
17	M4x25 Pan Pozi screw - Stainless Steel	BA-SCRM4-PH25SS	2

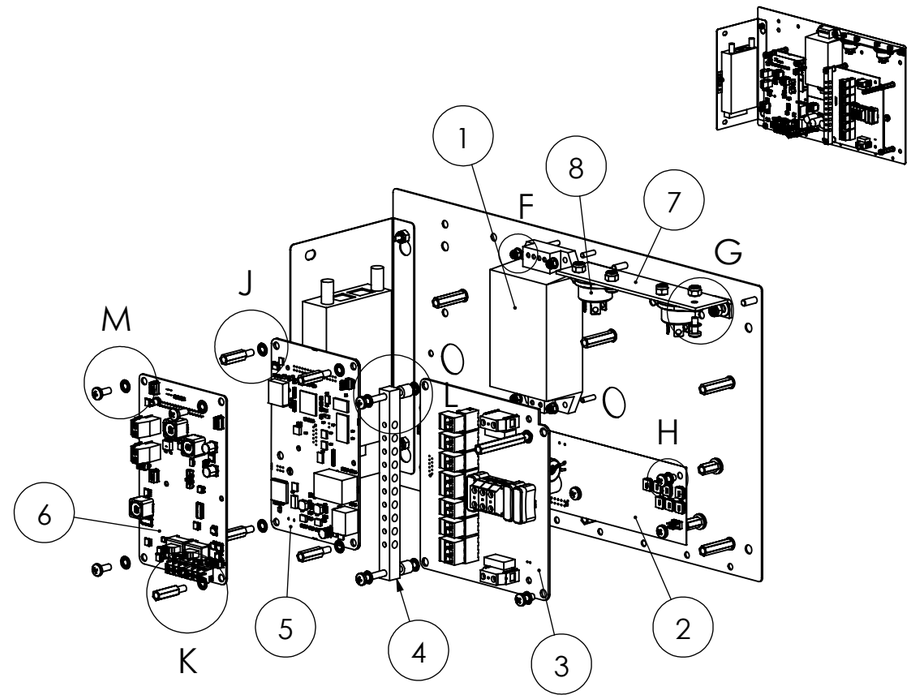





DETAIL F
(12v Power Supply)
SCALE 1 : 1




DETAIL H
(Base Board)
SCALE 1 : 1

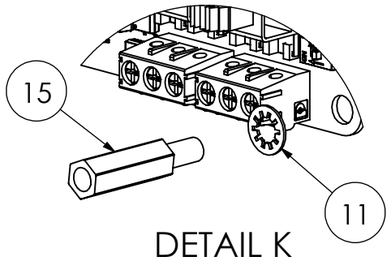


DETAIL K
(Safety Guard Mount)
SCALE 1 : 1

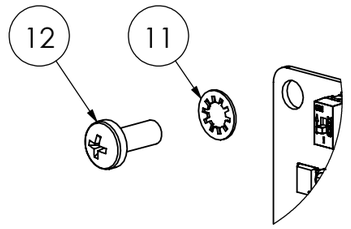


DETAIL M
(Comms Board)
SCALE 1 : 1

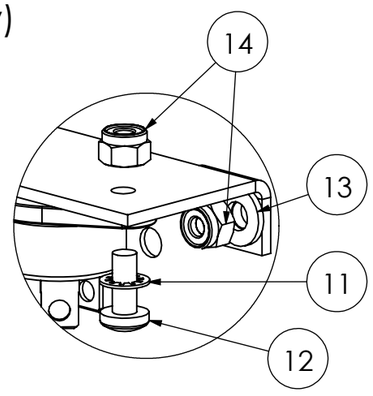

DETAIL G (Triac - Optional)
SCALE 1 : 1



DETAIL J
(Processor Board)
SCALE 1 : 1

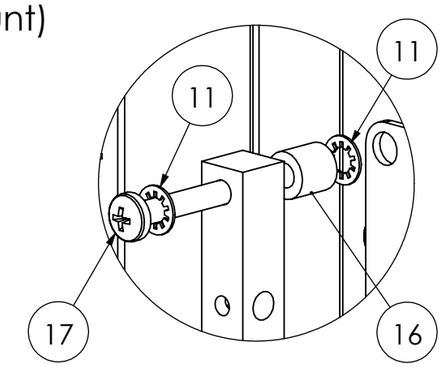

DETAIL L
(Earth Bar)
SCALE 1 : 1

Date: 26/07/2024

Revision Description: Initial Release

Optional Motor Triac : CP-C4TRIAC-A1 and CP-C4TRIAC-A2


© Copyright
Compac Industries Ltd
PO Box 12-417
52 Walls Road
Penrose, Auckland, NZ
Ph 649 5792094
Fax 649 5790635

Remove all burrs and sharp edges. Original Size A3. Do not scale from drawing.

C5K Comfill
C5K Comfill V2
C5K Module Assembly - 230V


Drawing	Sheet	Part Revision
ASM0088A	3/8	A

DC configuration Does not have:
-Triac Assembly
-AC/DC 60W 12V 5A Power module
-Polycarbonate Safety Guard

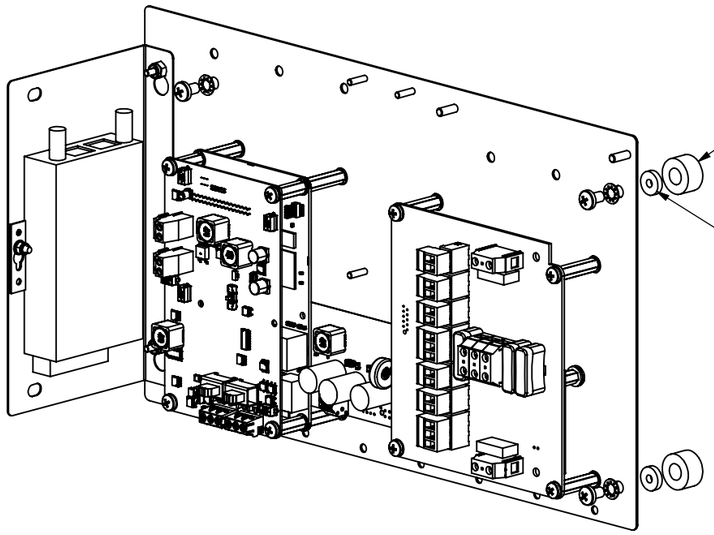

Fit M8 Nylon spacer and

CC10 NBR Spacer for
shock resistance

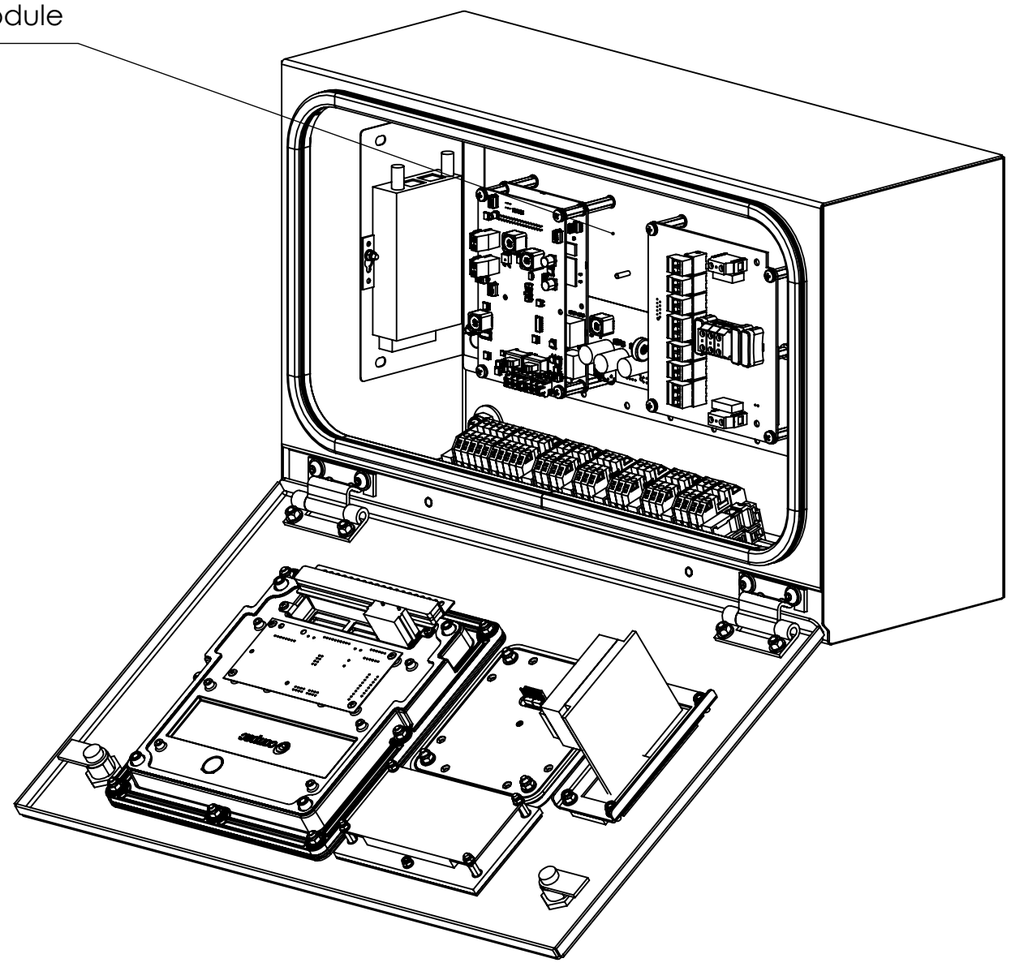

Date: 26/07/2024

Revision Description: Initial Release


© Copyright
Compac Industries Ltd
PO Box 12-417
52 Walls Road
Penrose, Auckland, NZ
Ph 649 5792094
Fax 649 5790635


Remove all burrs and sharp edges. Original Size A3. Do not scale from drawing.

C5K Comfill
C5K Comfill V2
12V/24V DC Module Assembly


Drawing	Sheet	Part Revision
ASM0088A	4/8	A

ITEM	Description	Part Number	QTY.
1	Depot Register Box - Mk5 Generic Assembly	CF-BOX-CFL-GN5	1
2	Storm 1000 Series_16way keypad - Gasket	(Part of) BA-STM100016KT	1
3	Storm 1000 Series_16way keypad	BA-STM100016KT	1
4	CI506 Pinpad Display gasket	(Part of) P-GSKT-DPT-7D	1
5	P-PERSPEX-DPT-PD	P-PERSPEX-DPT-PD	1
6	CI-506 C5K PINPAD	CP-C5K-PPAD	1
7	P-GSKT-DPT-7D	(Part of) P-GSKT-DPT-7D	1
8	7D1PX Display	CP-C5K-DSP7D1PX	1
9	12mm x 4mm x 3mm Rubber Washer	BA-SPCR-CC10	8
10	M4x12 flat washer - Stainless Steel	P-BOLT-M4X12-FW	8
11	M4 Nyloc Nut - Stainless Steel	P-BOLT-M4-NYL-SS	8
12	M3 flat washer - Nylon	P-BOLT-M3-FW-NYL	6
13	M3x10 Brass M/F Standoff	BA-SPCR-BM3-10	4
14	M3 Nylok Nut - Stainless Steel	P-BOLT-M3-N-NYS	6
15	M5 internal lock washer - Stainless Steel	P-BOLT-M5-SLWSS	4
16	M5x8 button head screw - Stainless Steel	BA-SCRM508BUTSS	4

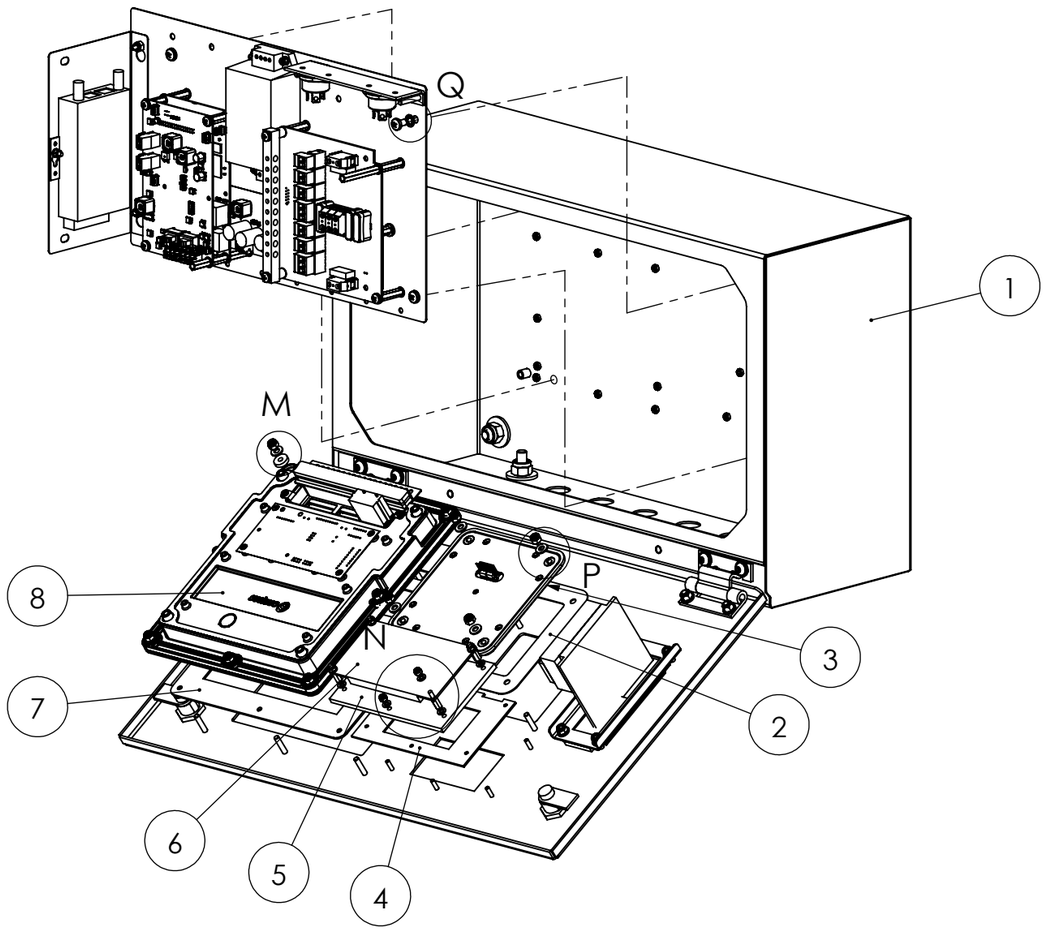





DETAIL M (Main Display)
SCALE 1 : 1

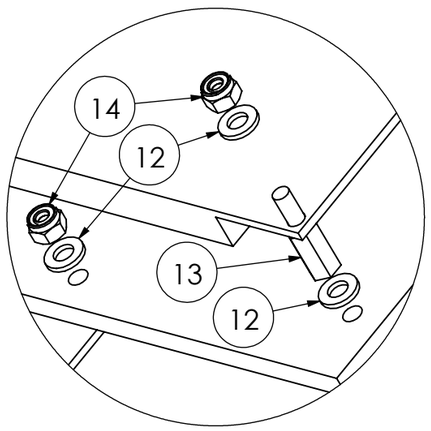

DETAIL N (Pinpad Display)
SCALE 1 : 1



DETAIL P (Keypad)
SCALE 1 : 1

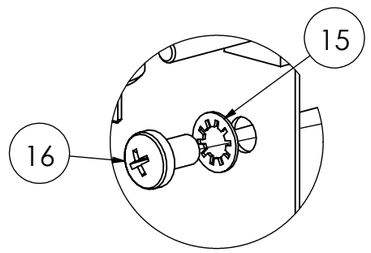

DETAIL Q (Gear Plate)
SCALE 1 : 1

Gland Option: BA-GLAND-UFP1A-E with M20 Gland Nut and star washers (up to 6x)
Depending on model.

Date: 26/07/2024

Revision Description: Initial Release


© Copyright
Compac Industries Ltd
PO Box 12-417
52 Walls Road
Penrose, Auckland, NZ
Ph 649 5792094
Fax 649 5790635

Remove all burrs and sharp edges.
Original Size A3.
Do not scale from drawing.


C5K Comfill (with CI533 Comms Board)
C5K Comfill V2 - Generic Full Assembly (with STORM 1000 16key Keypad)
Fascia Assembly


Drawing	Sheet	Part Revision
ASM0088A	**5/8**	**A**

ITEM	Description	Part Number	QTY.
1	Depot Register Terminal Rail Bracket	CF-C5DPT-TRBKT	1
2	35mm DIN Rail (quantity per metre)	BC-DIN-RL35	0.3
3	M5 Nyloc Nut - Stainless Steel	P-BOLT-M5-NYL-SS	2
4	M5 flat washer - Stainless Steel	P-BOLT-M5-FW-SS	2
5	M4x16 flat washer - Stainless Steel	P-BOLT-M4X16FWSS	2
6	M4 spring washer - Stainless Steel	P-BOLT-M4-SPWSS	2
7	M4x10 Pan Pozi screw - Stainless Steel	BA-SCRM4	2
8	Depot Box Seal (quantity per metre)	P-SEAL-EST10X7	1.6




DETAIL R
(Perspex Cover Mount #1)
SCALE 1 : 1

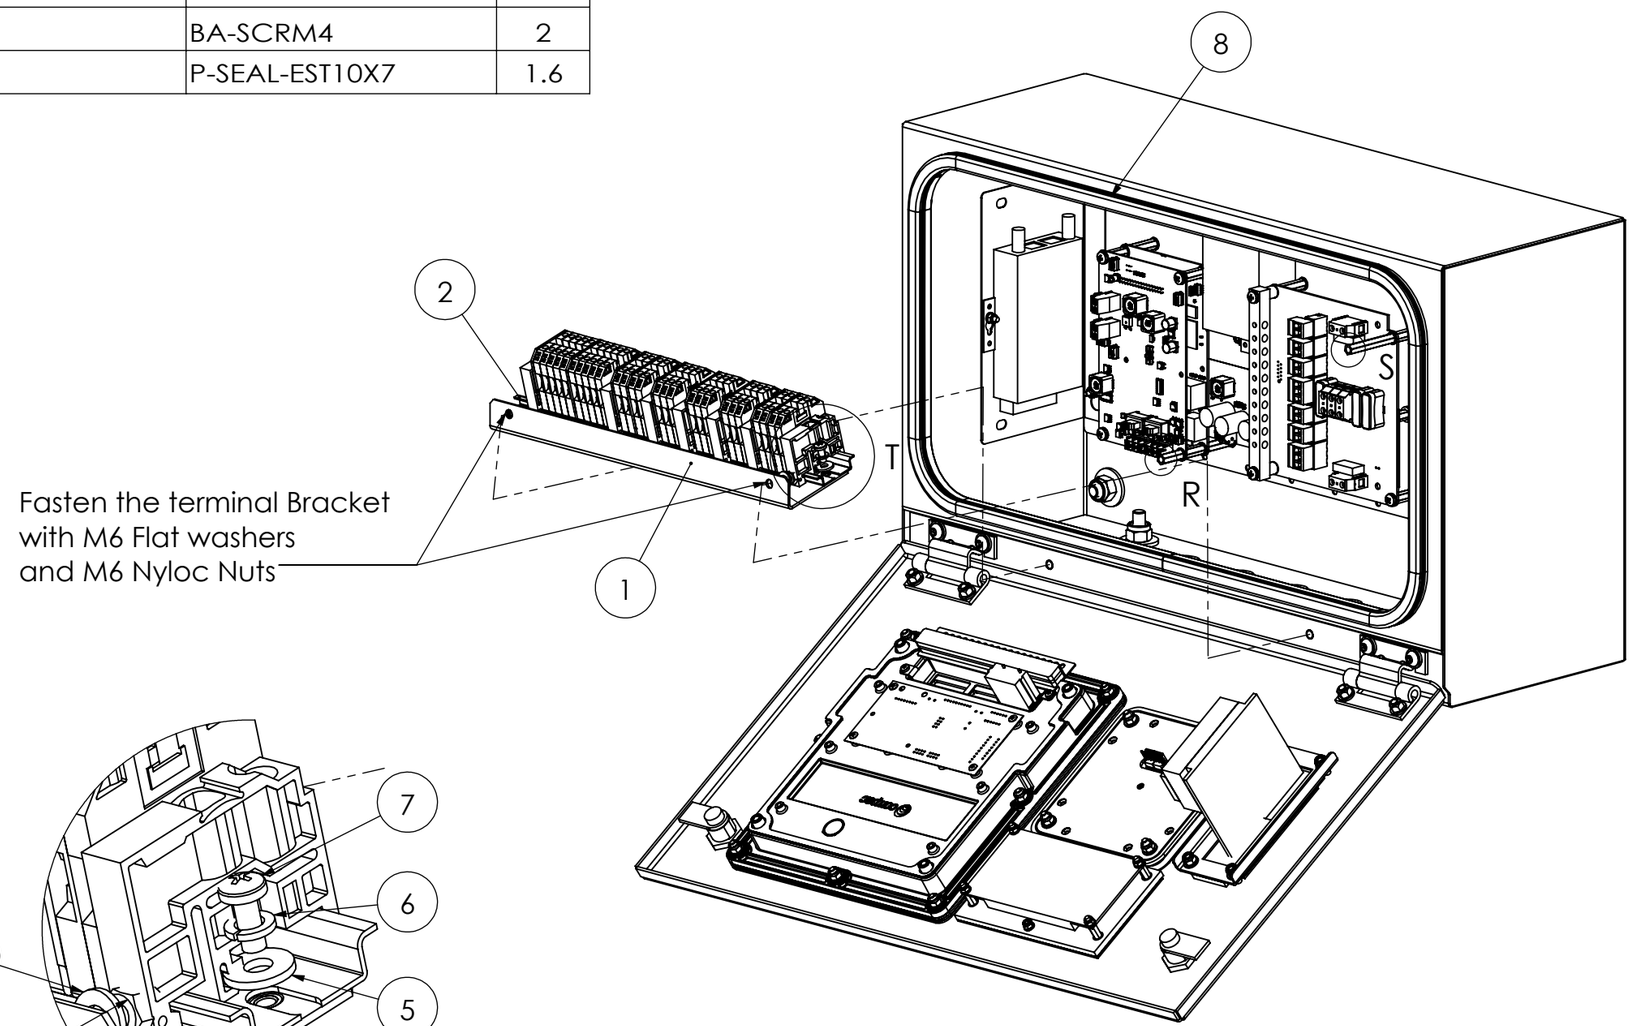



DETAIL S
(Perspex Cover Mount #2)
SCALE 1 : 1

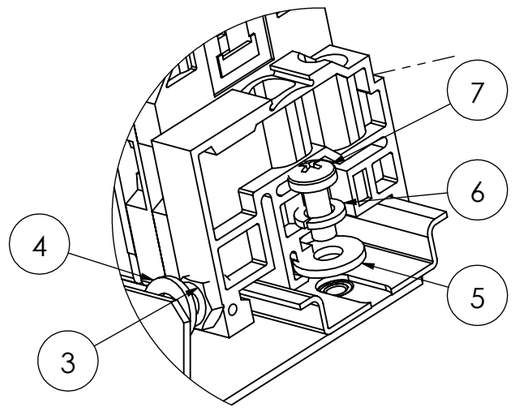

DETAIL T
(Terminal Rail)
SCALE 1 : 1

Date: 26/07/2024

Revision Description: Initial Release

© Copyright
Compac Industries Ltd
PO Box 12-417
52 Walls Road
Penrose, Auckland, NZ
Ph 649 5792094
Fax 649 5790635


Remove all burrs and sharp edges. Original Size A3. Do not scale from drawing.


C5K Comfill
C5K Comfill V2
Module Terminal Assembly

Drawing	Sheet	Part Revision
ASM0088A	**6/8**	**A**

TERMINAL RAIL * / CI533 COMMS BOARD * 15 CORE MULTICORE LOOM CONNECTIONS


**** NOTE:** 'BRACKETED' DESIGNATIONS, e.g **"(A/RED)" ARE THE CI533 BOARD TERMINAL DESIGNATIONS.***
***THE COLOUR/S FOR EACH CORE USED FOLLOWS AFTER THE** 'BRACKETED' DESIGNATIONS.*

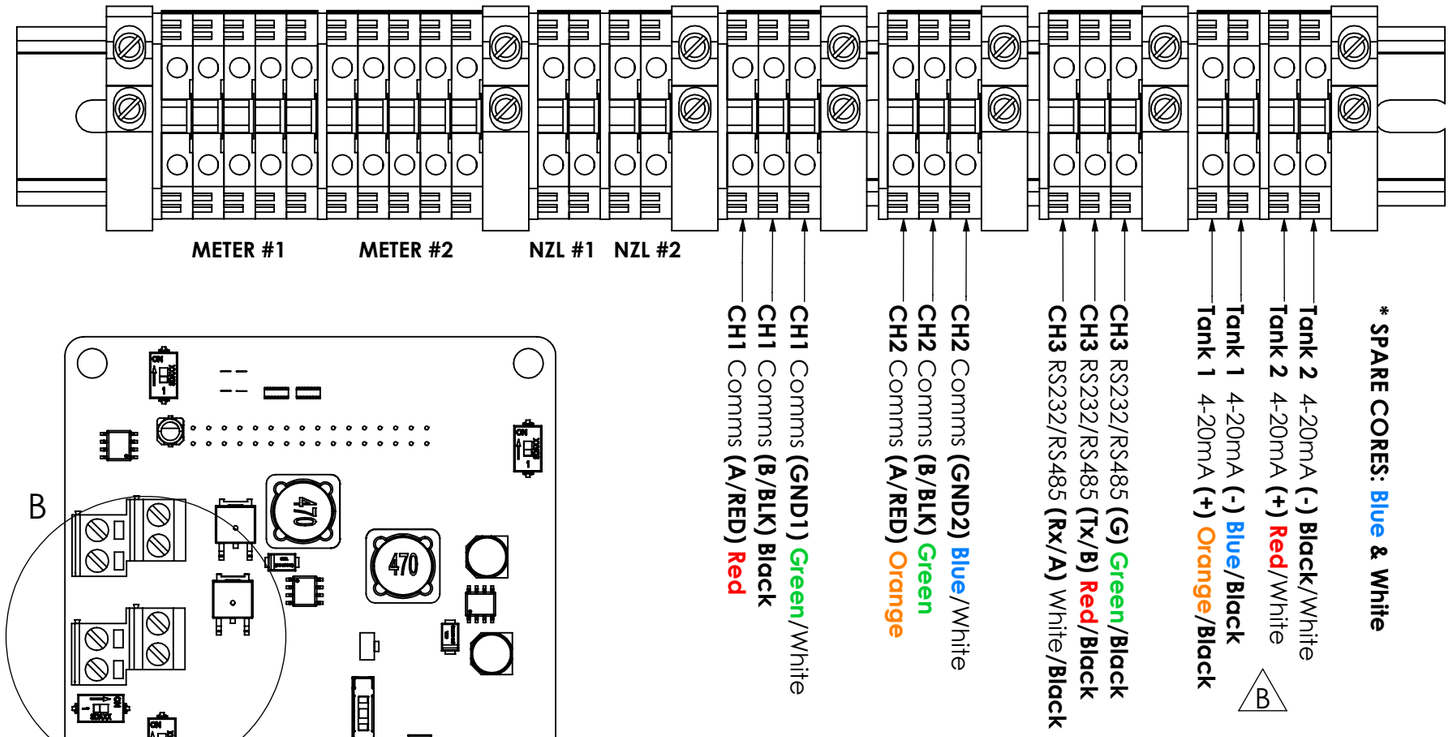

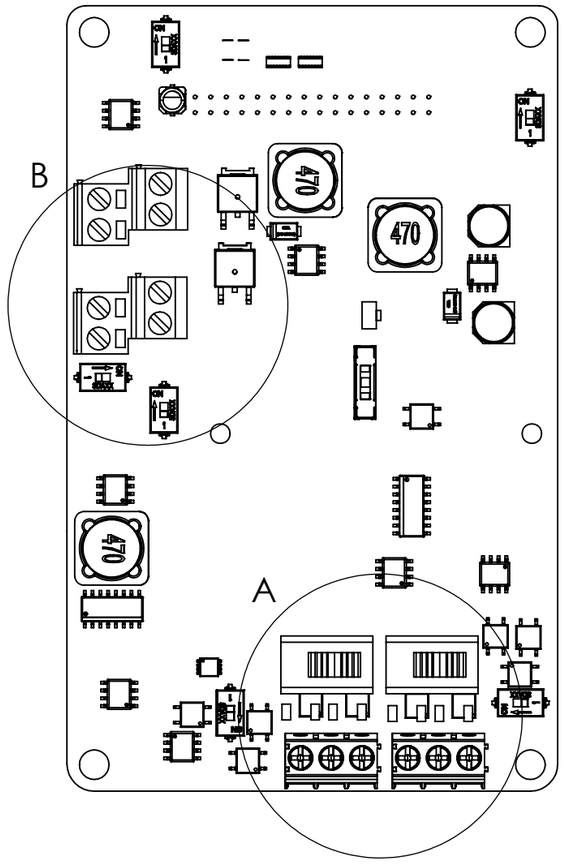


CI533 C5K Comms Driver Board:
'Default' setting for **CH1 & CH2** Comms Switches is **'POS#1'**
'Default' setting for **CH3** RS232/485 Selector Switch is **'ON'**

DETAIL A

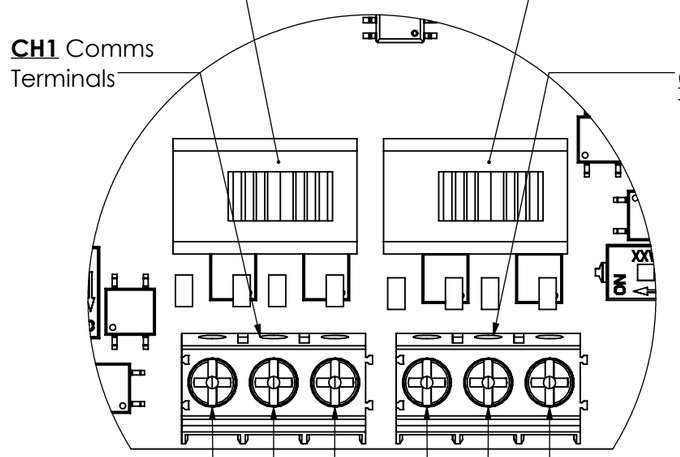

DETAIL B

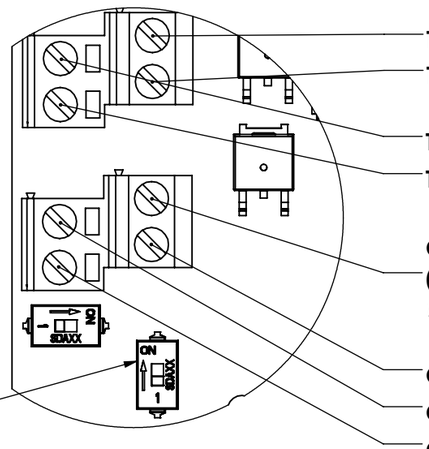

NOTE: THE TERMINAL RAIL IS SHOWN IN THE CORRECT ORIENTATION (LOOKING FROM THE 'FRONT' OF THE 'COMFILL' WITH THE DOOR OPEN).

WIRE ALL CORES/LOOMS INTO THE 'FRONT' SIDE OF THE 'TERMINAL RAIL'

(THE 'REAR' SIDE OF THE 'TERMINAL RAIL' IS FOR THE 'END-USER')

Date: 26/07/2024


Revision Description: Initial Release

© Copyright
Compac Industries Ltd
PO Box 12-417
52 Walls Road
Penrose, Auckland, NZ
Ph 649 5792094
Fax 649 5790635


Remove all burrs and sharp edges. Original Size A3. Do not scale from drawing.

C5K Comfill
C5K Comfill V2
Terminal Rail - 15 Core Multicore Loom Connections


Drawing	Sheet	Part Revision
ASM0088A	7/8	A

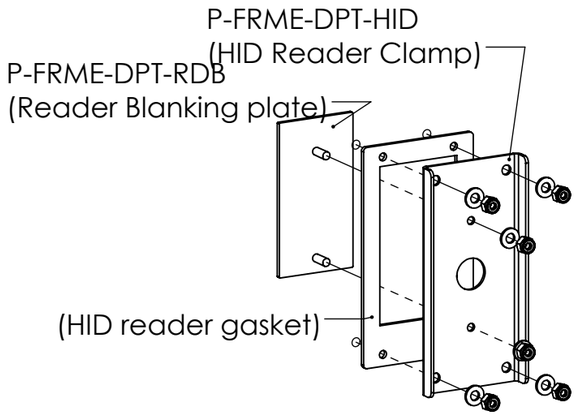

Pin Authorisation
Reader Blanking Module
Module to be assembled to the door with:
M4 SS Flat washers and Nyloc Nuts

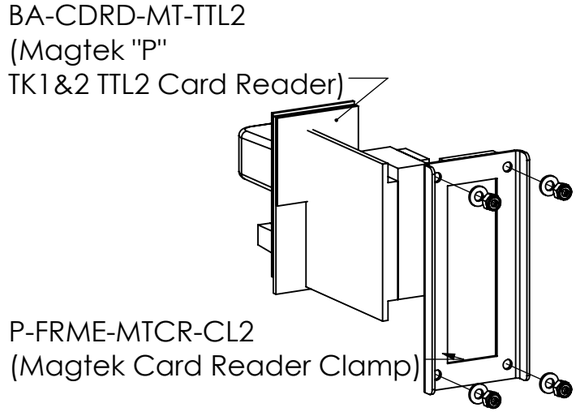

Fuel Card Authorisation
TTL2 Card reader Module
Module to be assembled to the door with:
M4 SS Flat washers and Nyloc Nuts

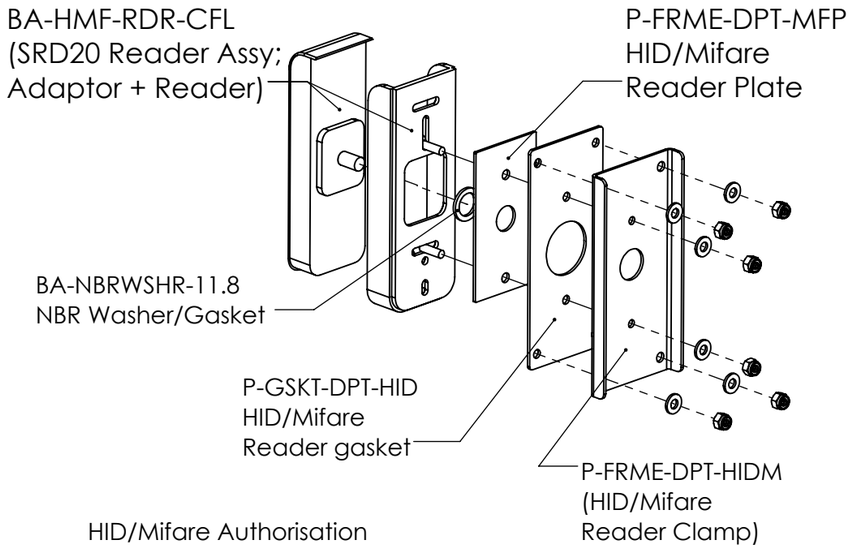

HID/Mifare Authorisation
HID/Mifare Reader Module
Module to be assembled to the door with:
M4 SS Flat washers and Nyloc Nuts

Date: 26/07/2024

Revision Description: Initial Release

© Copyright
Compac Industries Ltd
PO Box 12-417
52 Walls Road
Penrose, Auckland, NZ
Ph 649 5792094
Fax 649 5790635

Remove all burrs and sharp edges. Original Size A3. Do not scale from drawing.

C5K Comfill
Authorisation Options

Drawing	Sheet	Part Revision
ASM0088A	**8/8**	**A**