
CORONA
RESORT & CASINO
PHÚ QUỐC

Slot Technical Department

Aristocrat RAM Clear Procedure with Worldbase v. 5.04

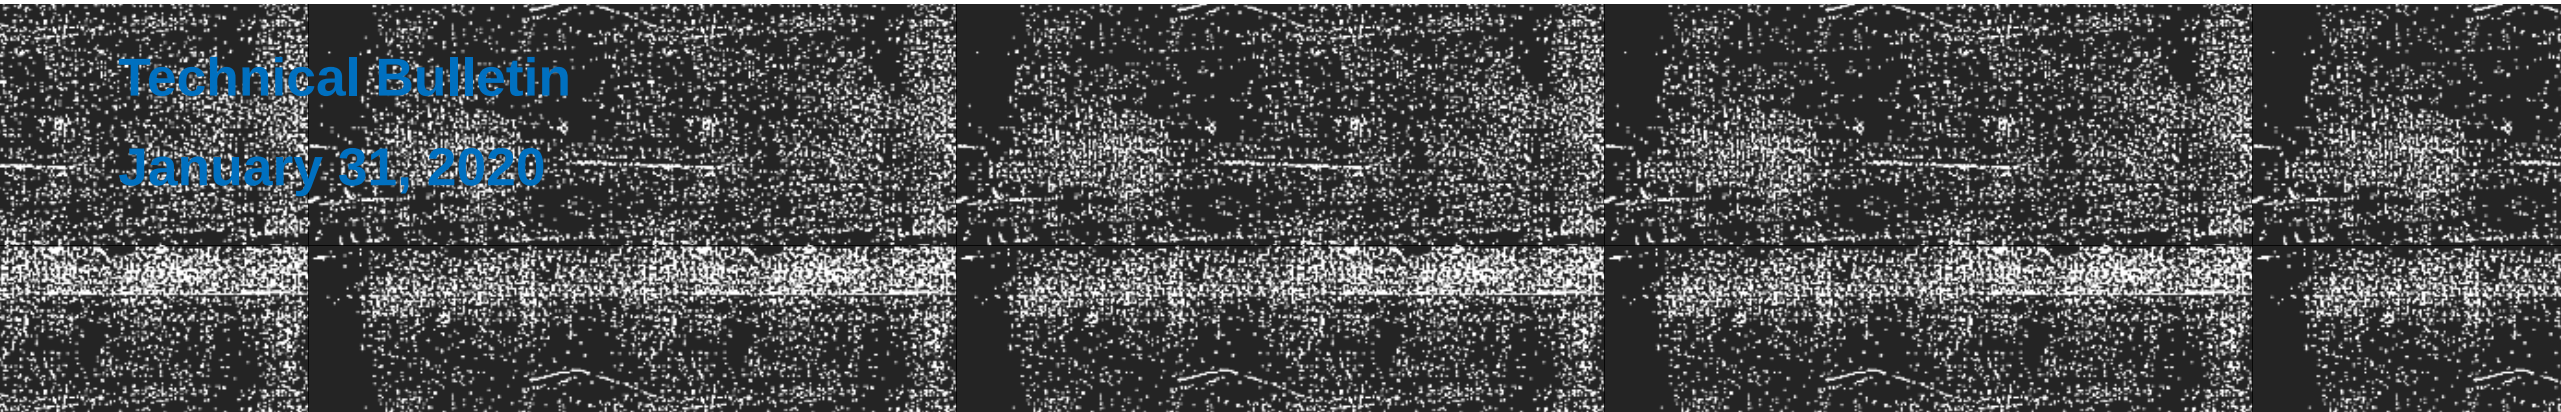

Technical Bulletin

January 31, 2020



Aristocrat Helix WorldBase 5.04 (StandAlone)

- Open the main door of the machine to access the logic box and turnoff the main power switch




Maindoor lock



Power Switch




Logic Box door

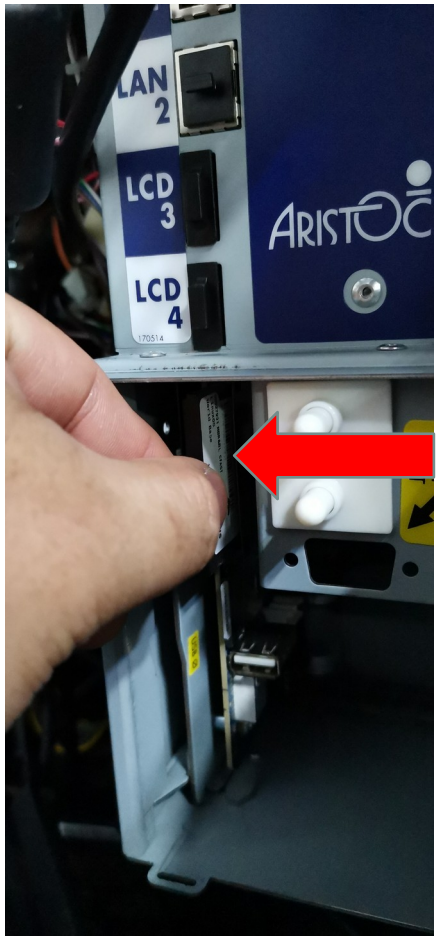

Cfast card

- Open the Logic box door
- Push-in and Pull-out to remove the Cfast Card from the cf card slot

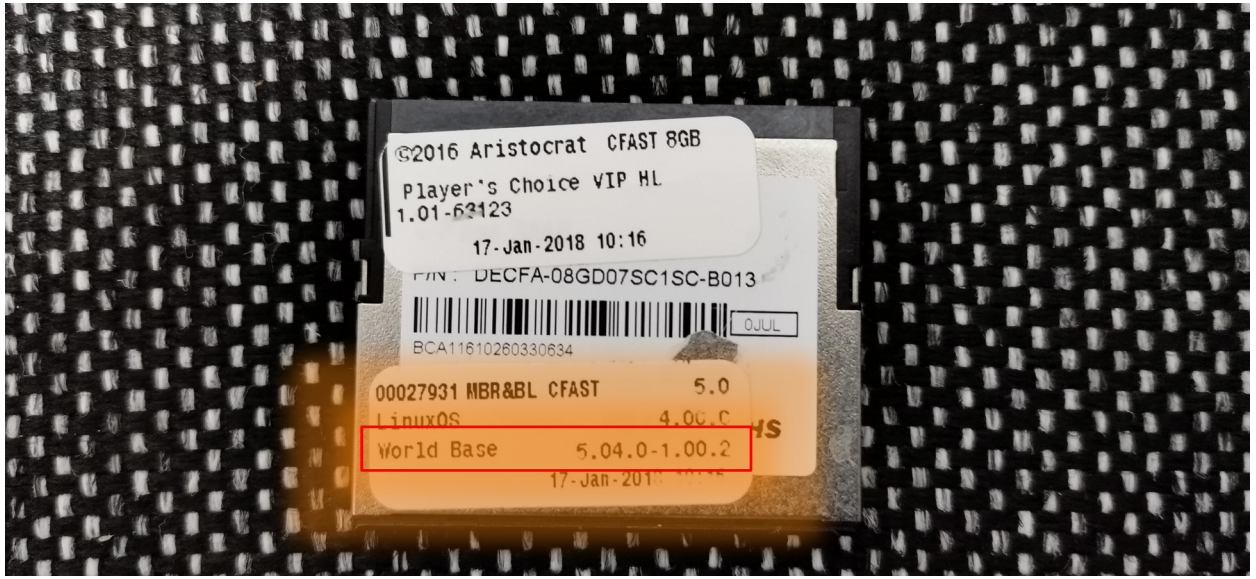

- Verify the World Base platform version on Clast Card
- Based on the Set Chip Table below, use the Set Chip version accordingly



Set Chips of Aristocrat installed at Corona Casino




Set Chip for worldbase 5.04-1.00.2

- Aristocrat Set Chip Table

Set Chip Version	World Base Platform
7.02.17	5.00.0 – 1.00.3 5.01.0 – 1.00.3 5.01.1 – 1.01.0 5.03.1 – 1.01.3
7.02.23	5.04-1.00.2
7.02.50	5.04-1.00.0 or Higher


- Select Set Chip version according to the World Base platform of the machine

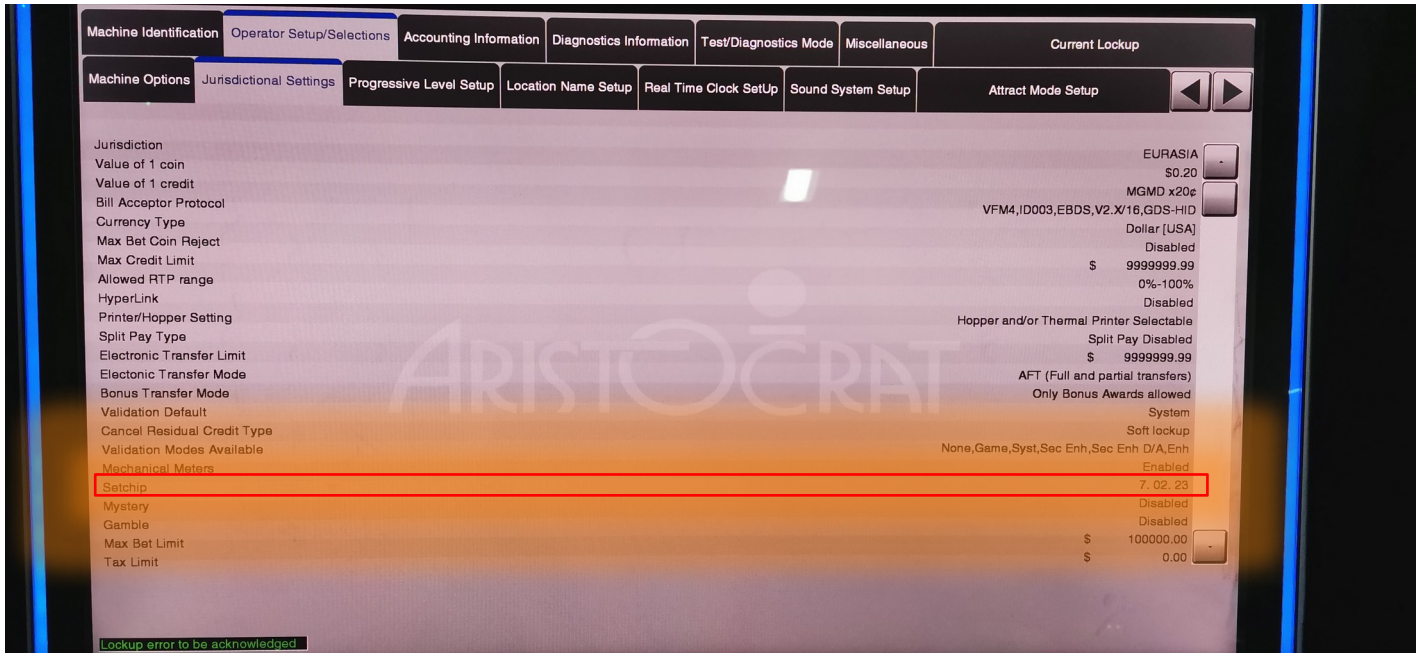


1. Turn audit key
2. Select Operator Setup/Selections
3. Select Jurisdictional Settings and locate Setchip

Or you can verify the Set Chip version on the Jurisdictional Settings under Operator Setup/Selection of the Audit Menu


- Insert Set Chip card on the clasi card slot
- Power on machine

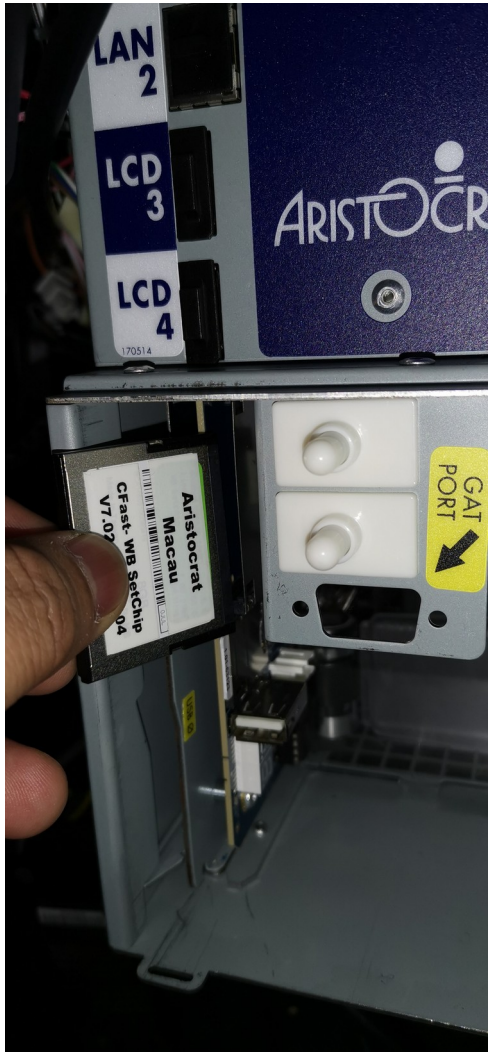


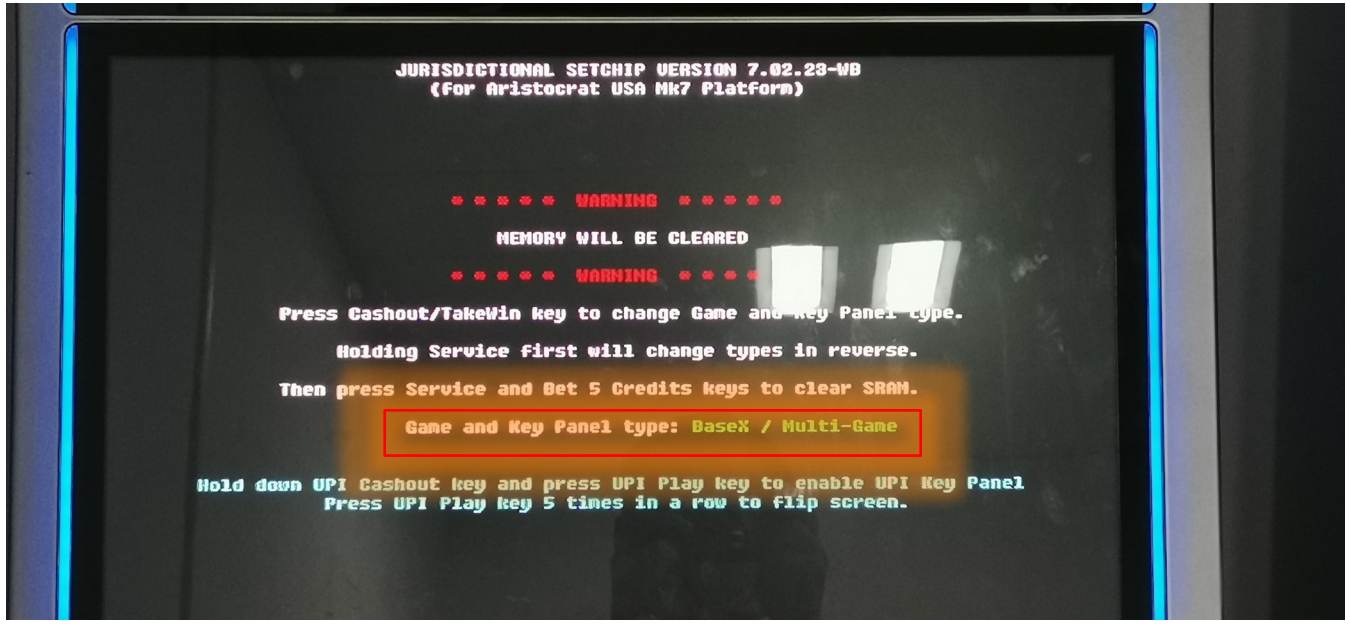




- The machine will display the following screen
- Select "*BaseX / Multi-Game*" by pressing Cashout / Takewin
- Press Service and Bet 5 buttons at the same time to Clear Ram

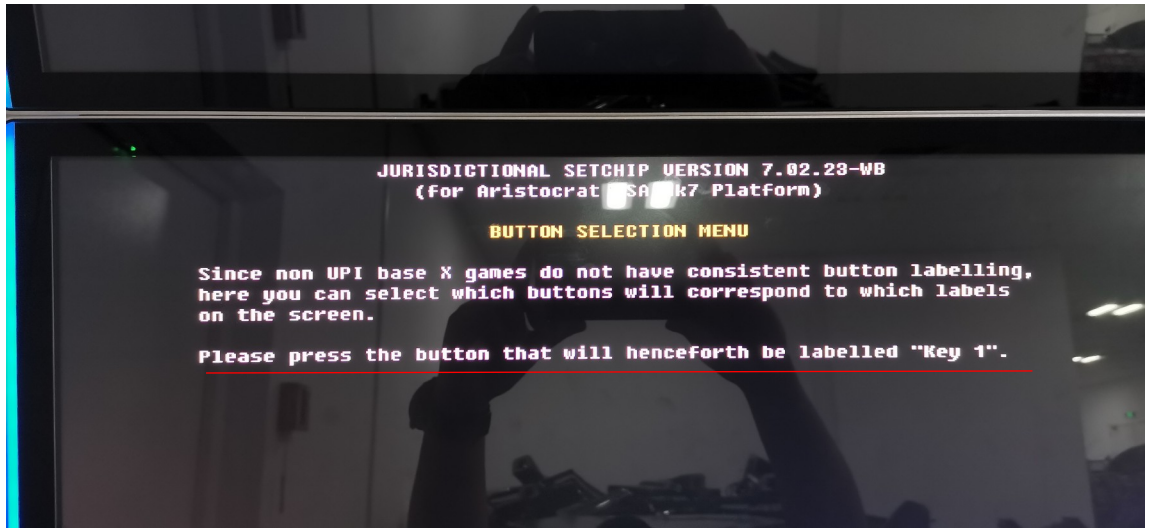

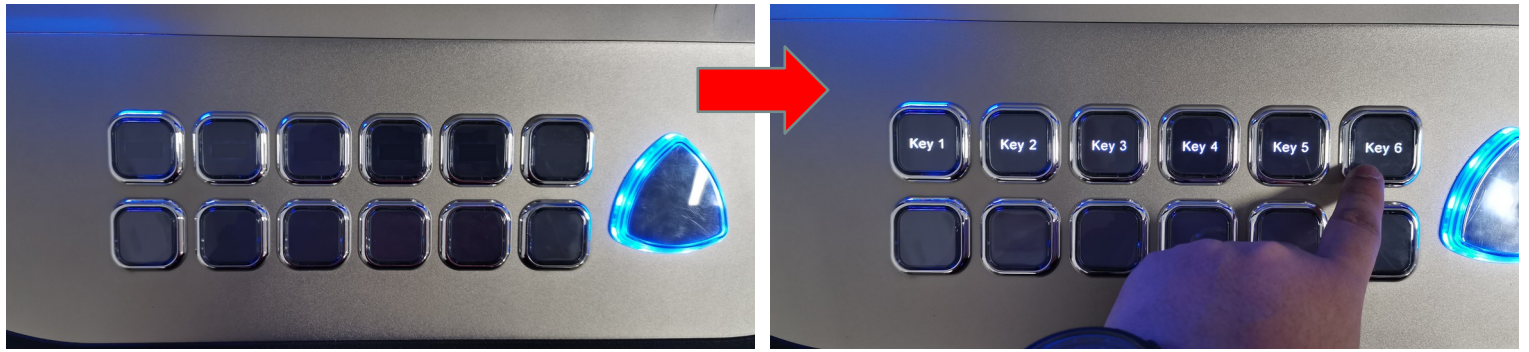


Labelling Keys 1 - 6

- Press the button starting from Top Left Button to the Top Right Button
- After the pressing each 6 button the Label should be same as per photo below.

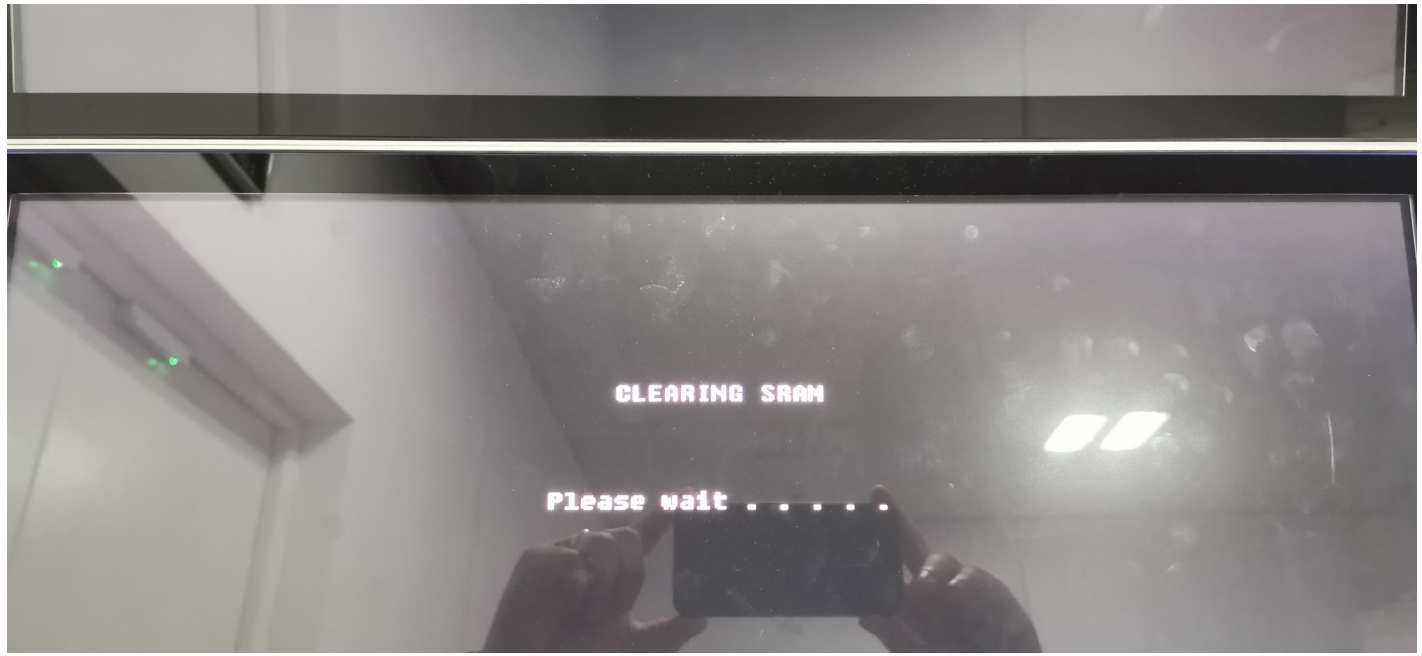


- After pressing the last button labelled 'key 6', the machine will start clearing Ram.

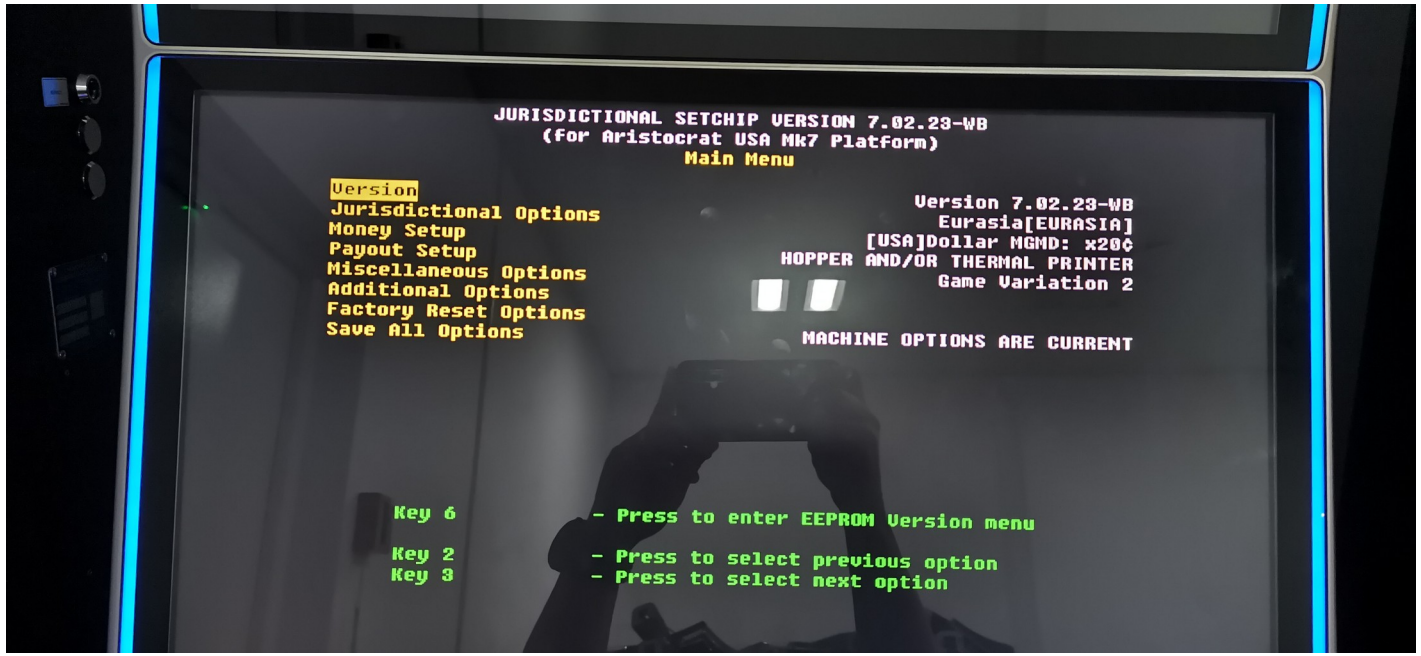

- Jurisdictional Setup Menu will be displayed on screen.
- Ram Clear has been done at this point.
- Power off machine.
- Remove the SetChip from
- Insert game Cfast card into the cf card slot.
- Power on machine.

NOTE:

- If there will be changes of Jurisdictional settings on this menu, (e.g. Variation, Denomination, etc.) go to page 28.

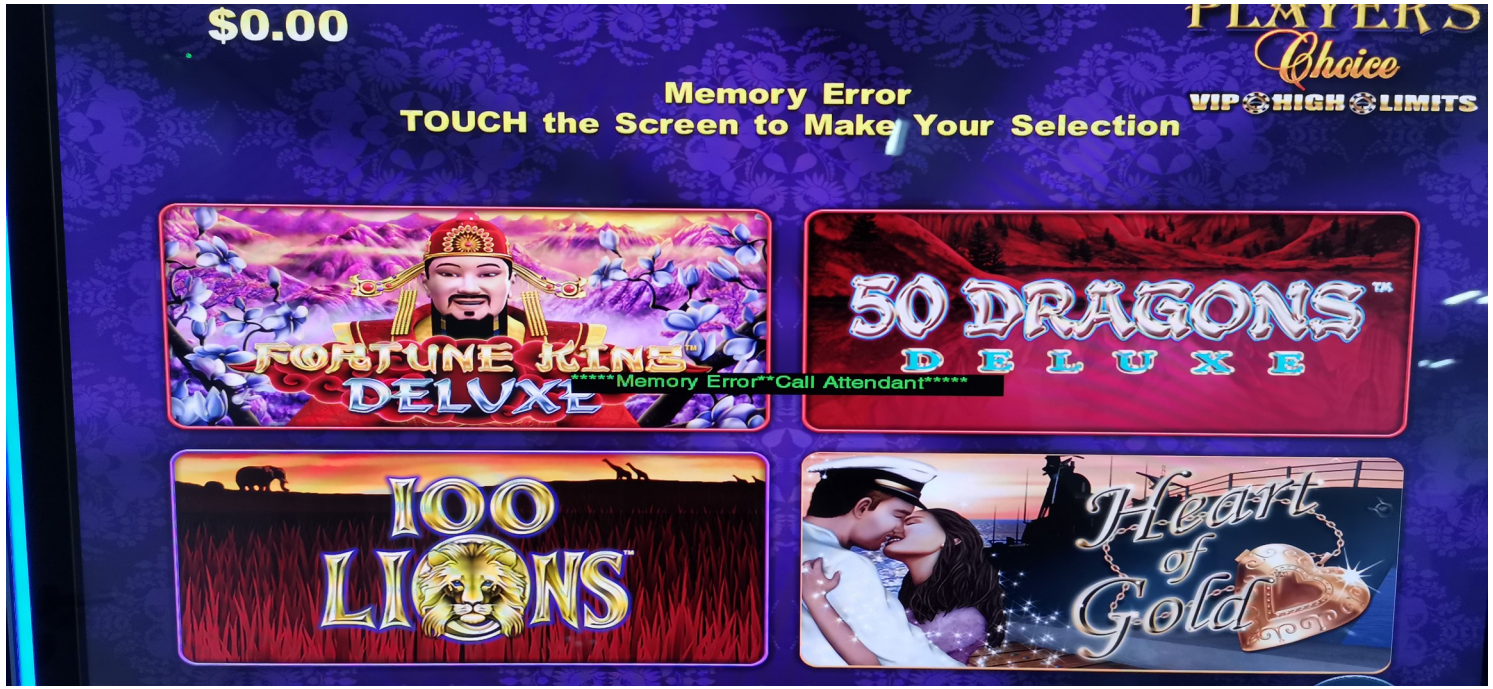




- Upon the game has been loaded, a "Memory Error, Call Attendant" error will appear on screen.
- Turn Audit Key to access menu






- Machine will prompt to select Touch Screen Driver, select "HID Touch Screen", use Bet 1 or Bet 2 to navigate.
- Press Service to Save/Configure

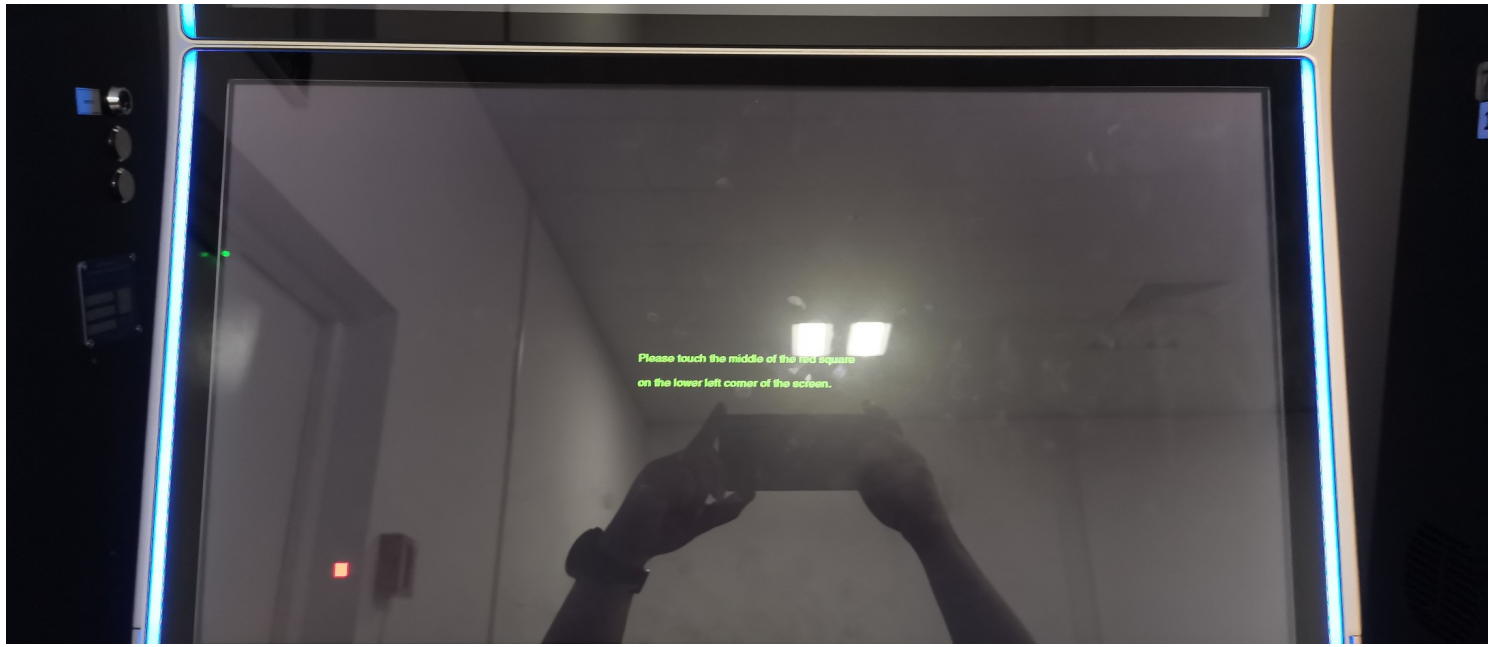


- Machine will prompt to calibrate touch screen

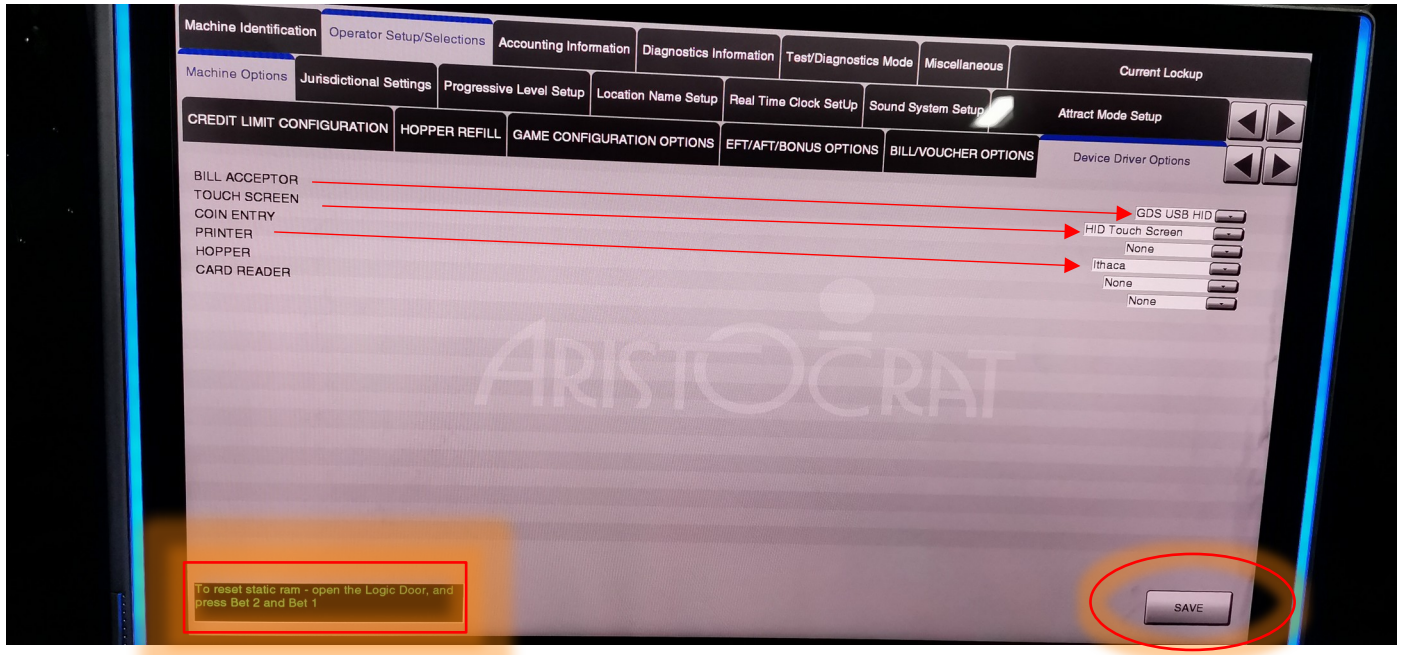




- Device Driver Options
- Under Operator Setup / Selections
- Select Machine Options
- Set the options as follows (see photo) and tap **Save**
- Press Button Bet x1 and Bet x2 at the same time to clear static ram. Note: logic door must be open.

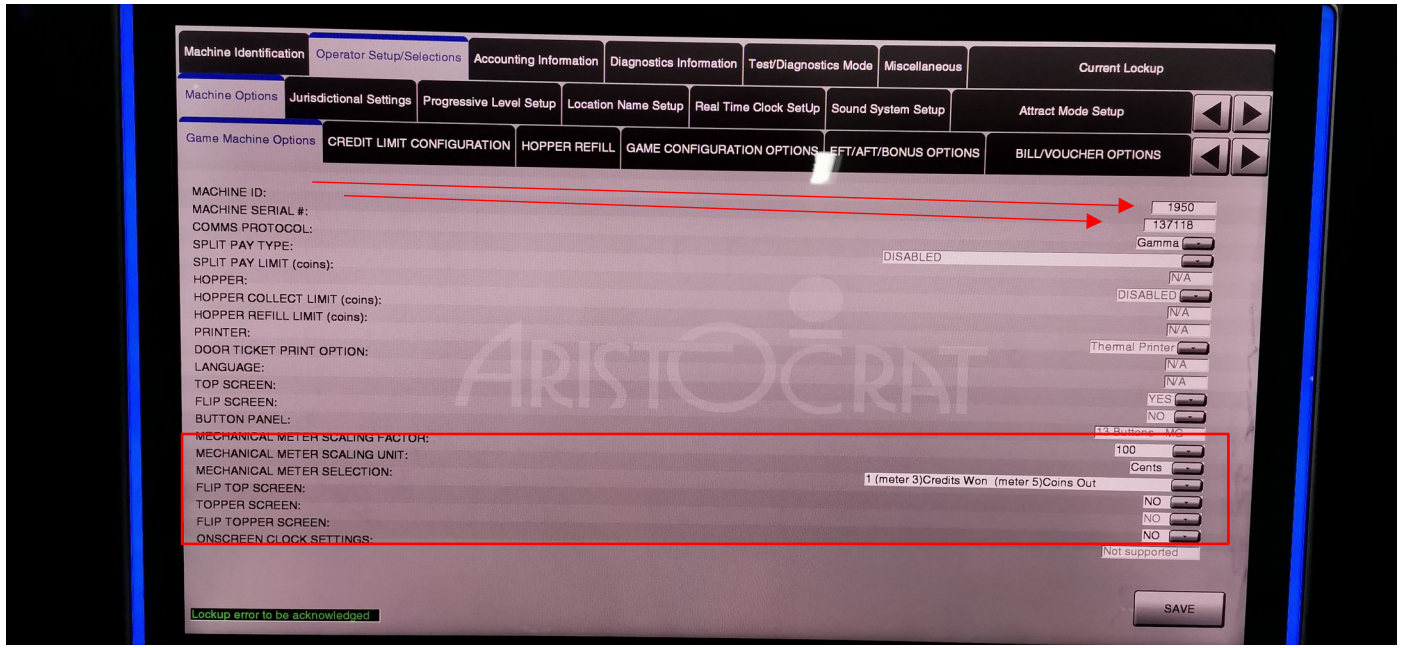


Game Machine Options

- Set the options as follows (see photo) and tap **Save**

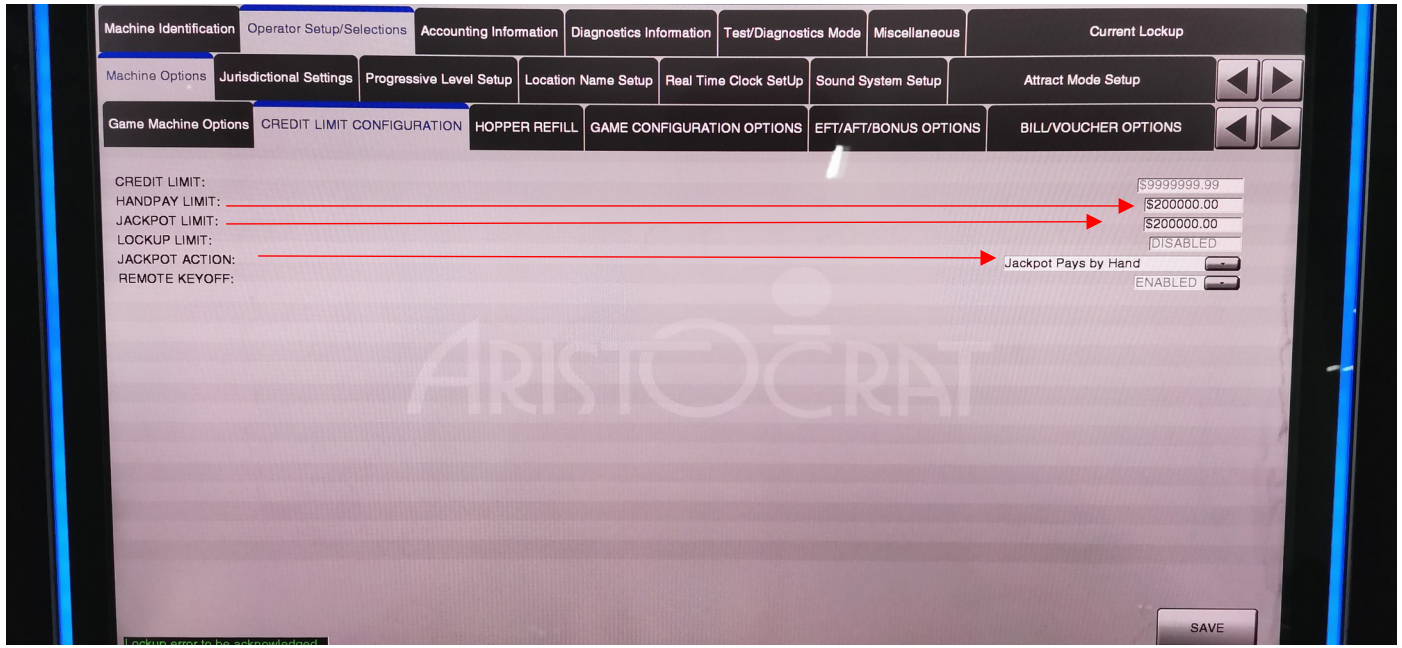


Credit Limit Configuration

- Set the options as follows (see photo) and tap **Save**

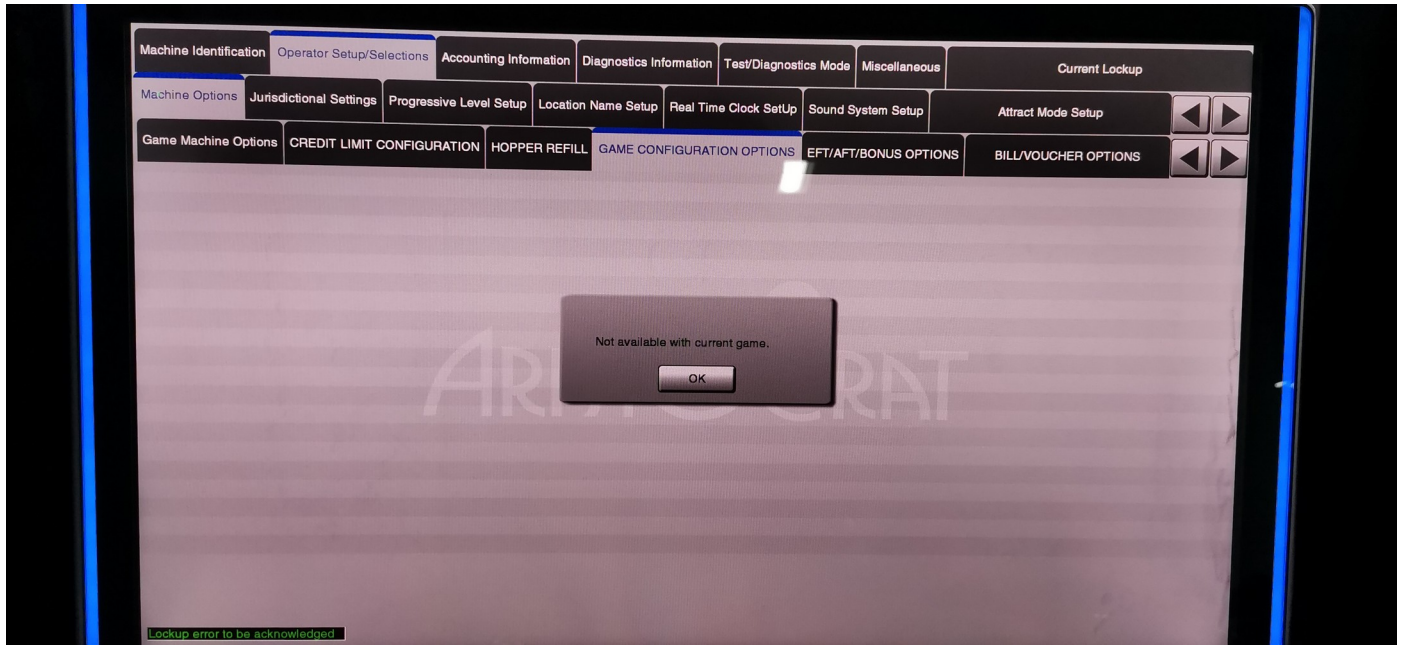


Game Configuration Options

- For this type of game, game config is not available

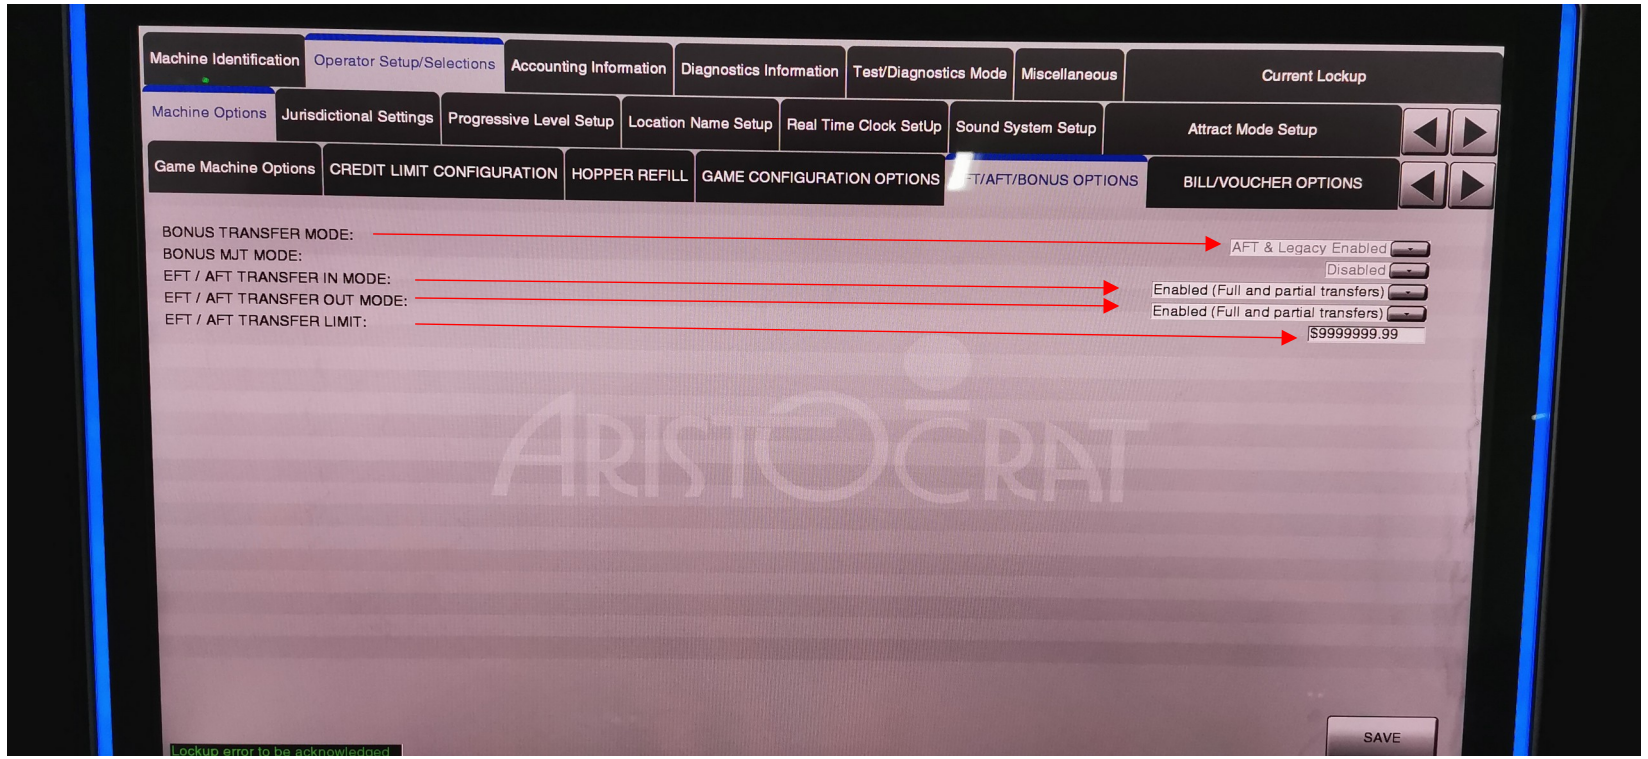


EFT/AFT Bonus Options

- Set the options as follows (see photo) and tap **Save**

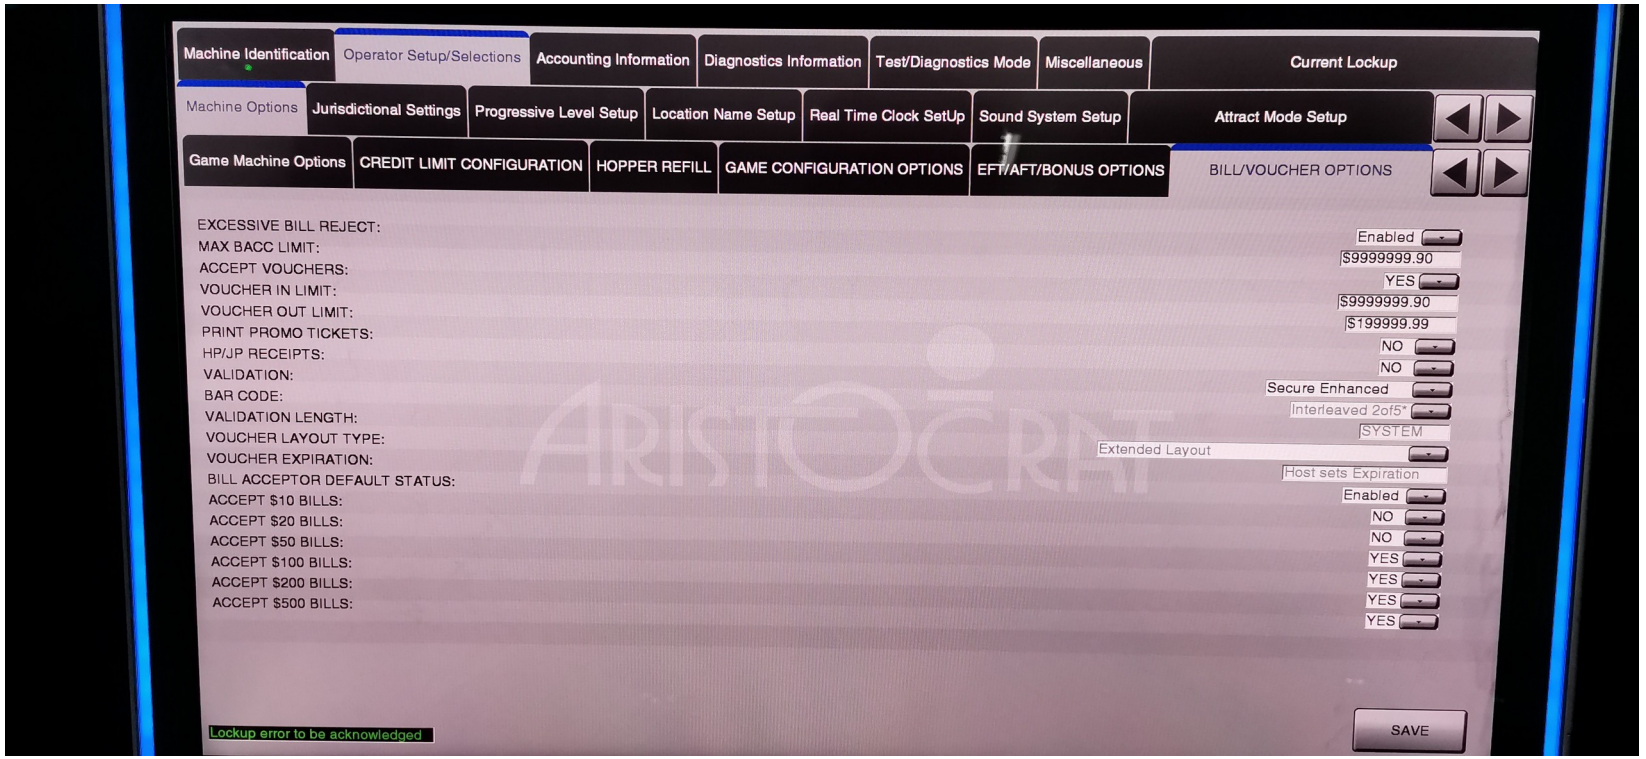


Bill Voucher Options

- Set the options as follows (see photo) and tap **Save**

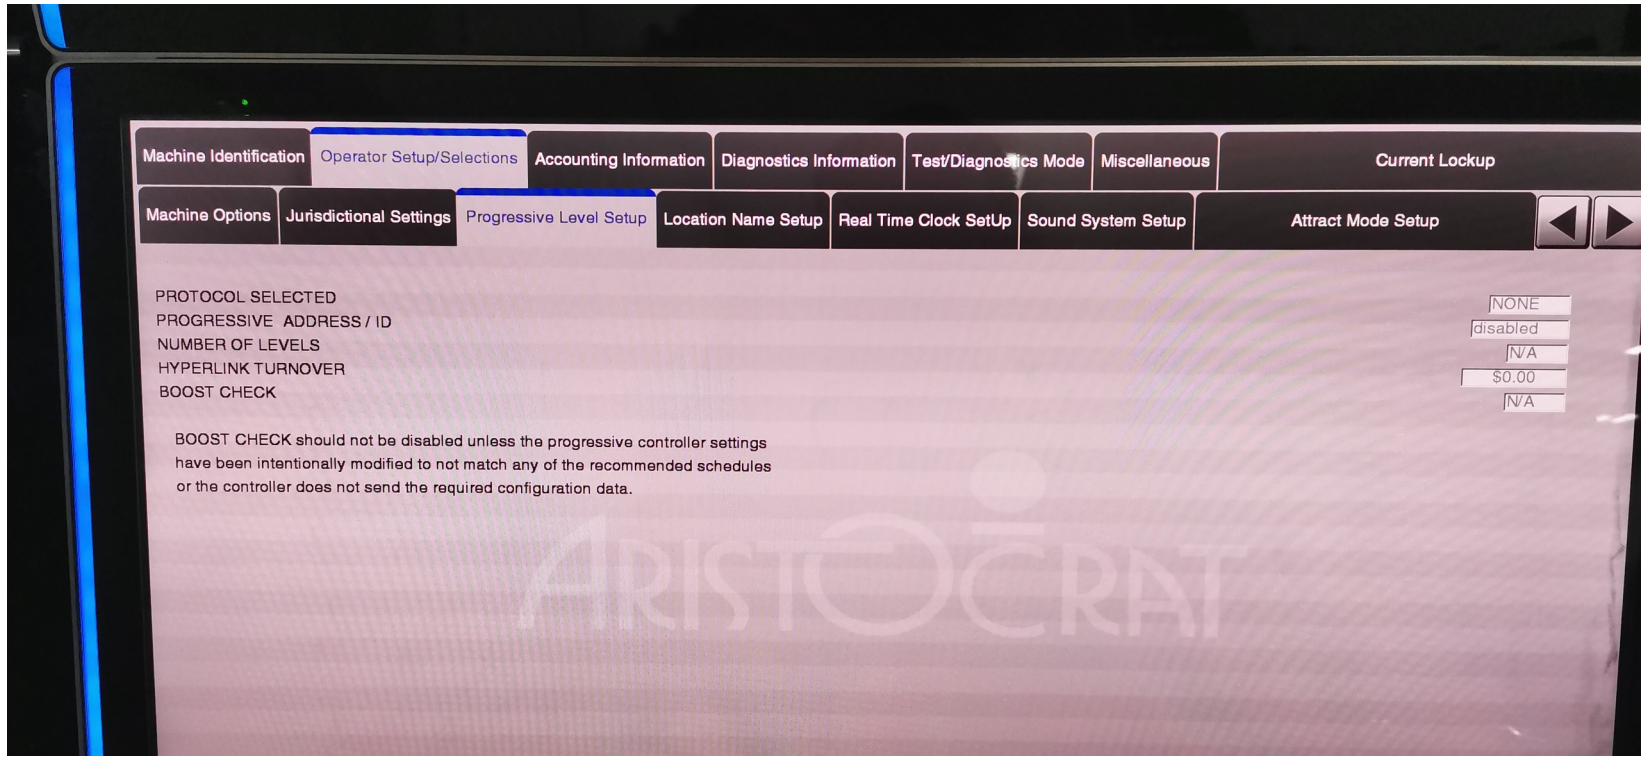


Progressive level Setup

- This is to set the progressive level

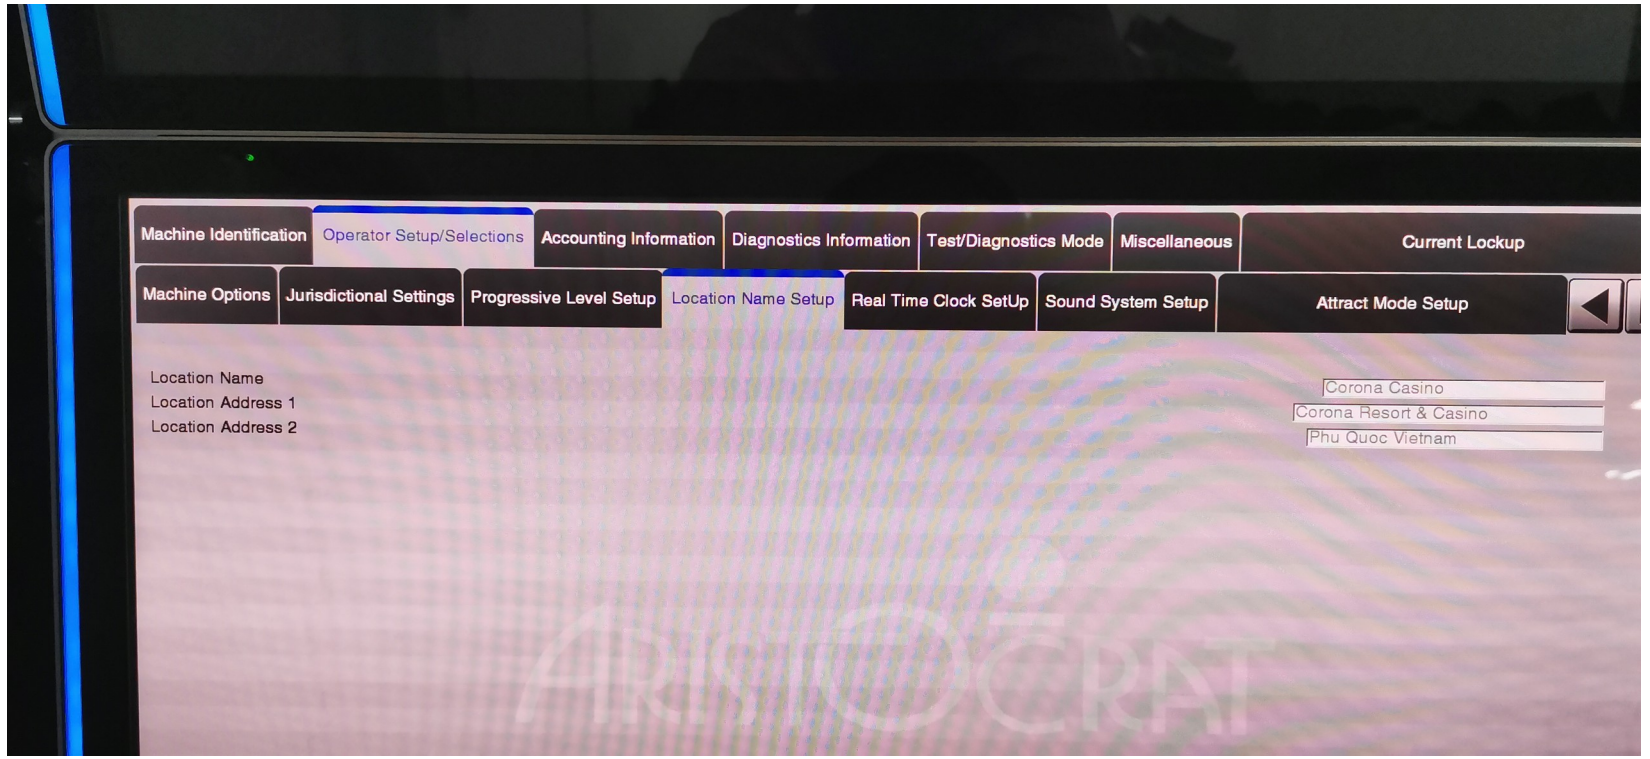


Location Name Setup

- Auto set by the system or host

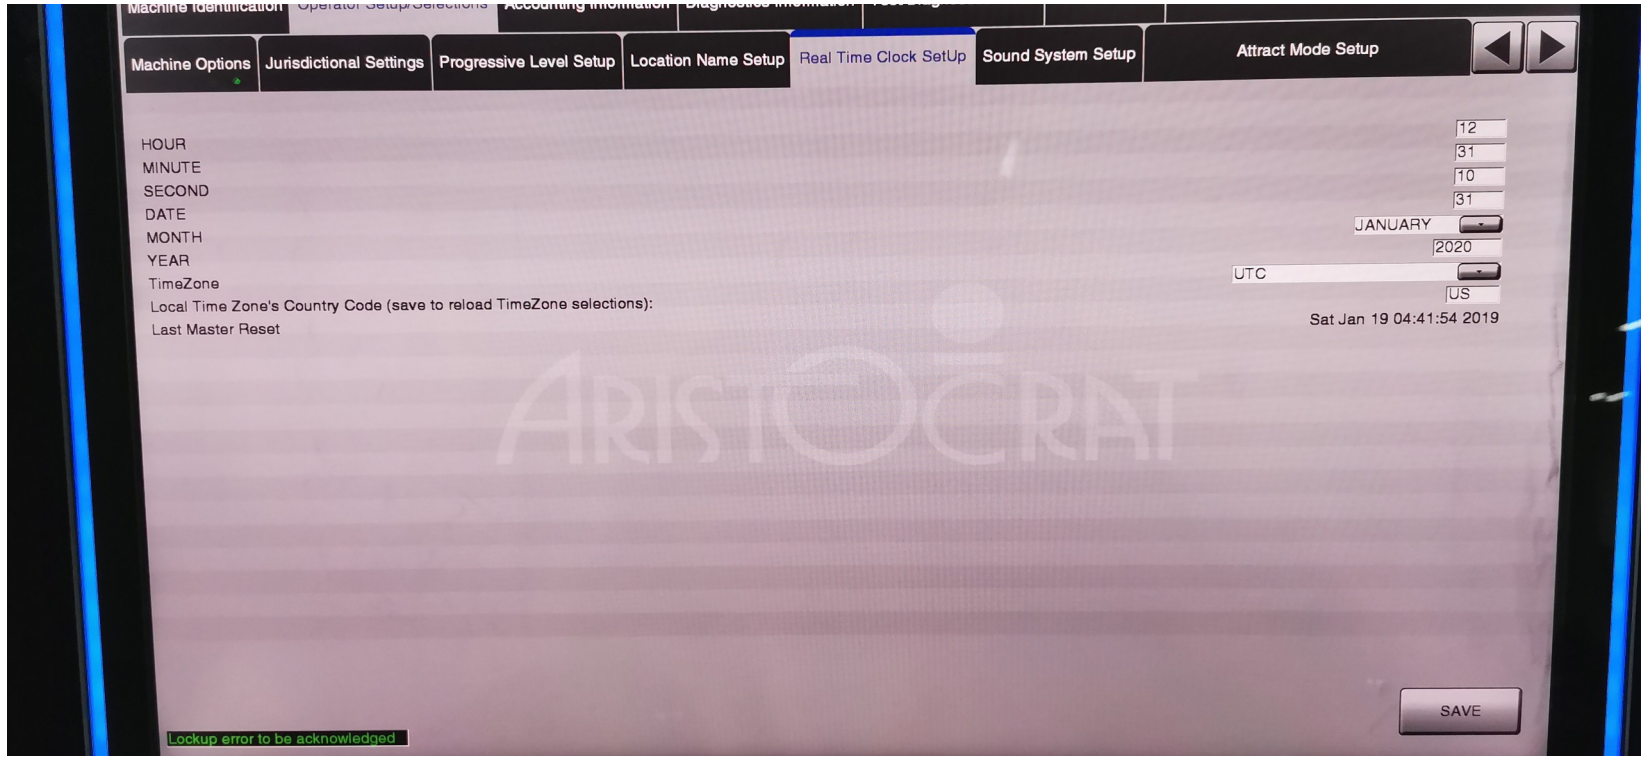


Real Time Clock Setup

- Set up time and date
- Tap Save

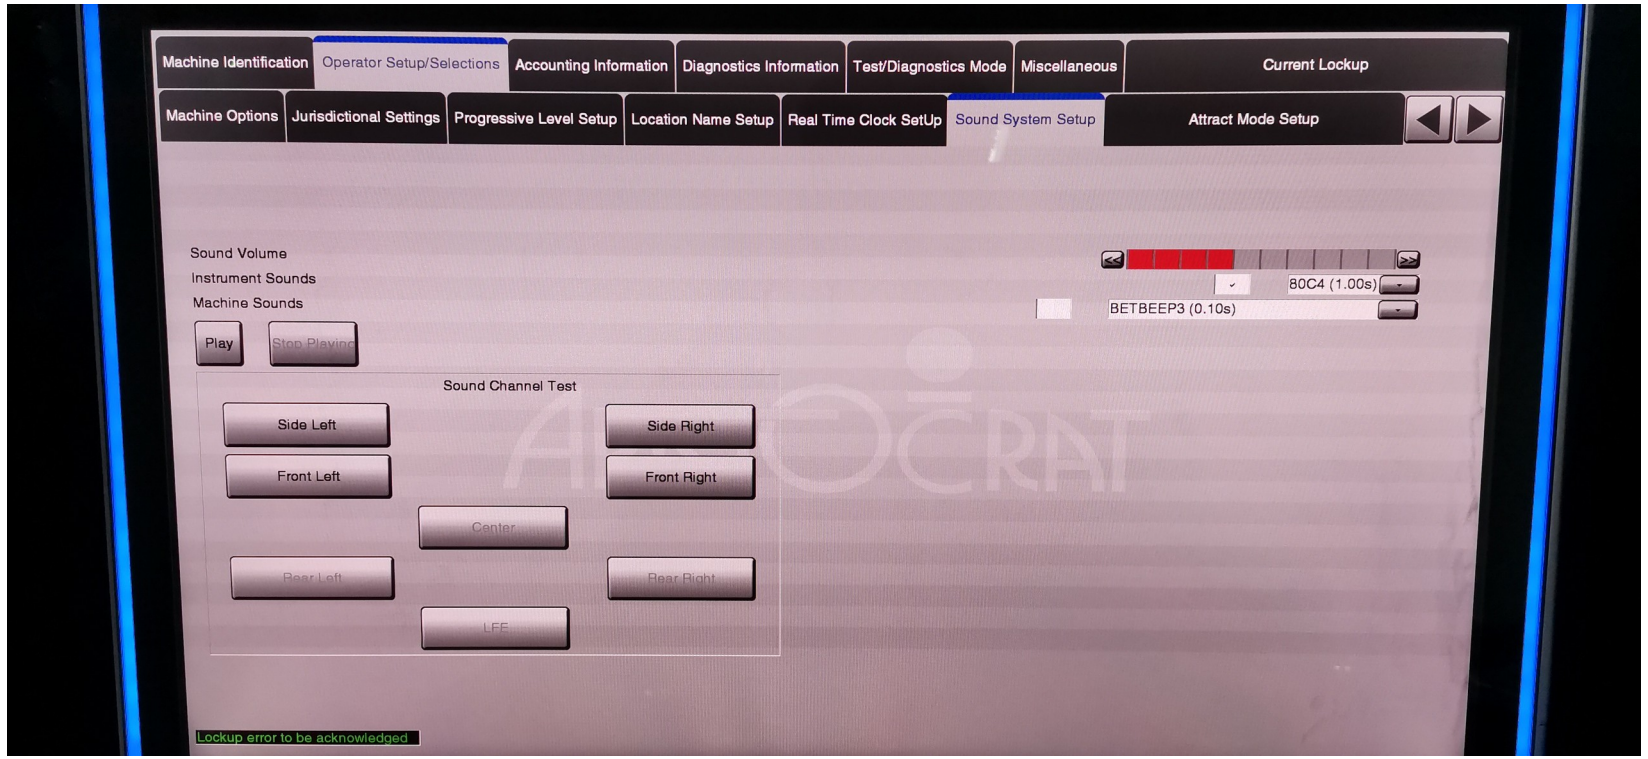


Sound System Setup

- Set up sound volume

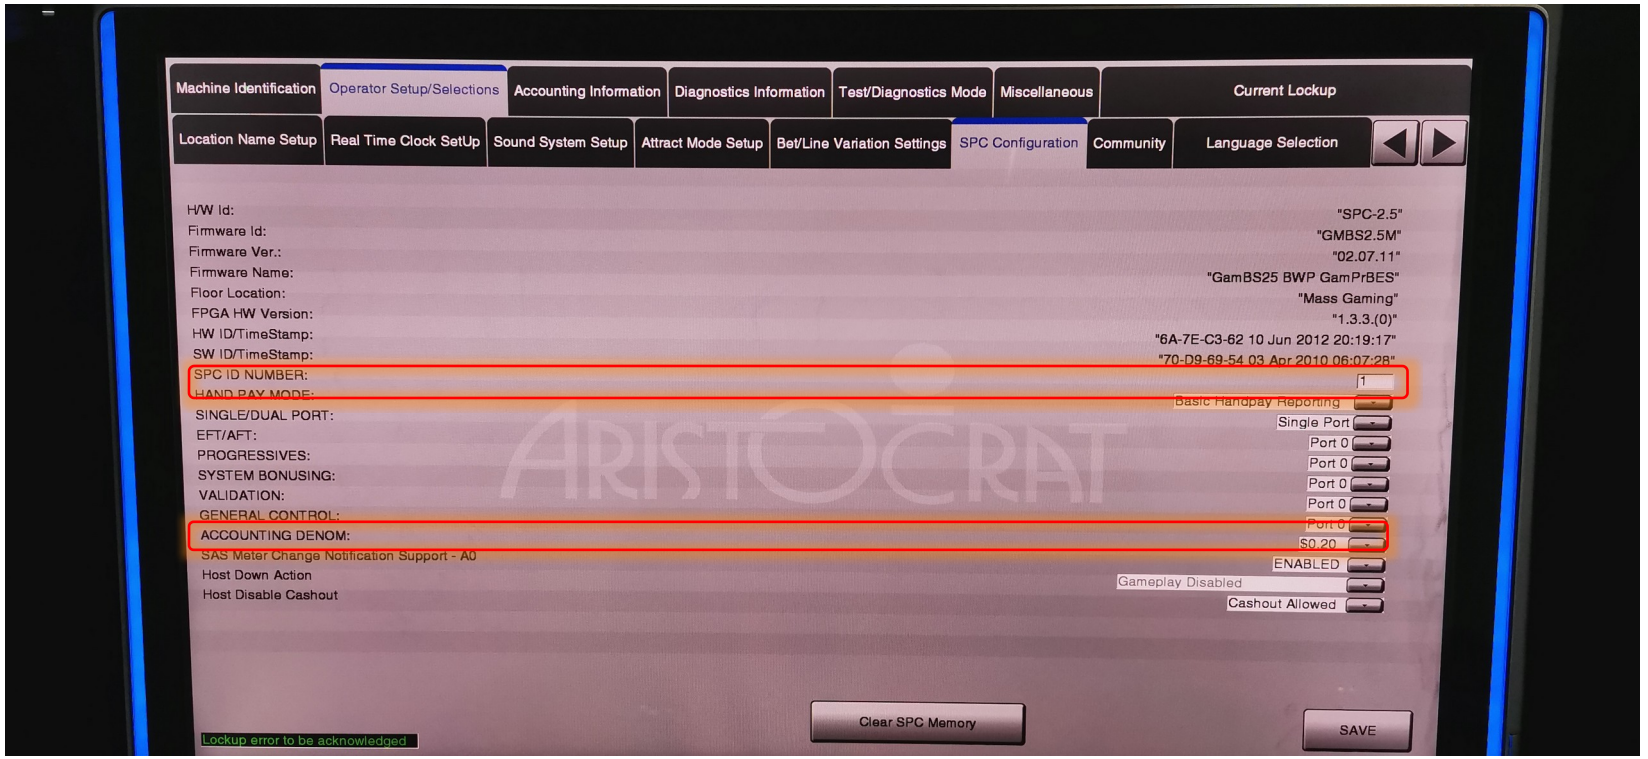

- SPC Configuration
- SPC ID number = 1
- Accounting denom = denom set by management
- Tap **Save** to save options set
- Tap Clear SPC memory to clear SPC2.5

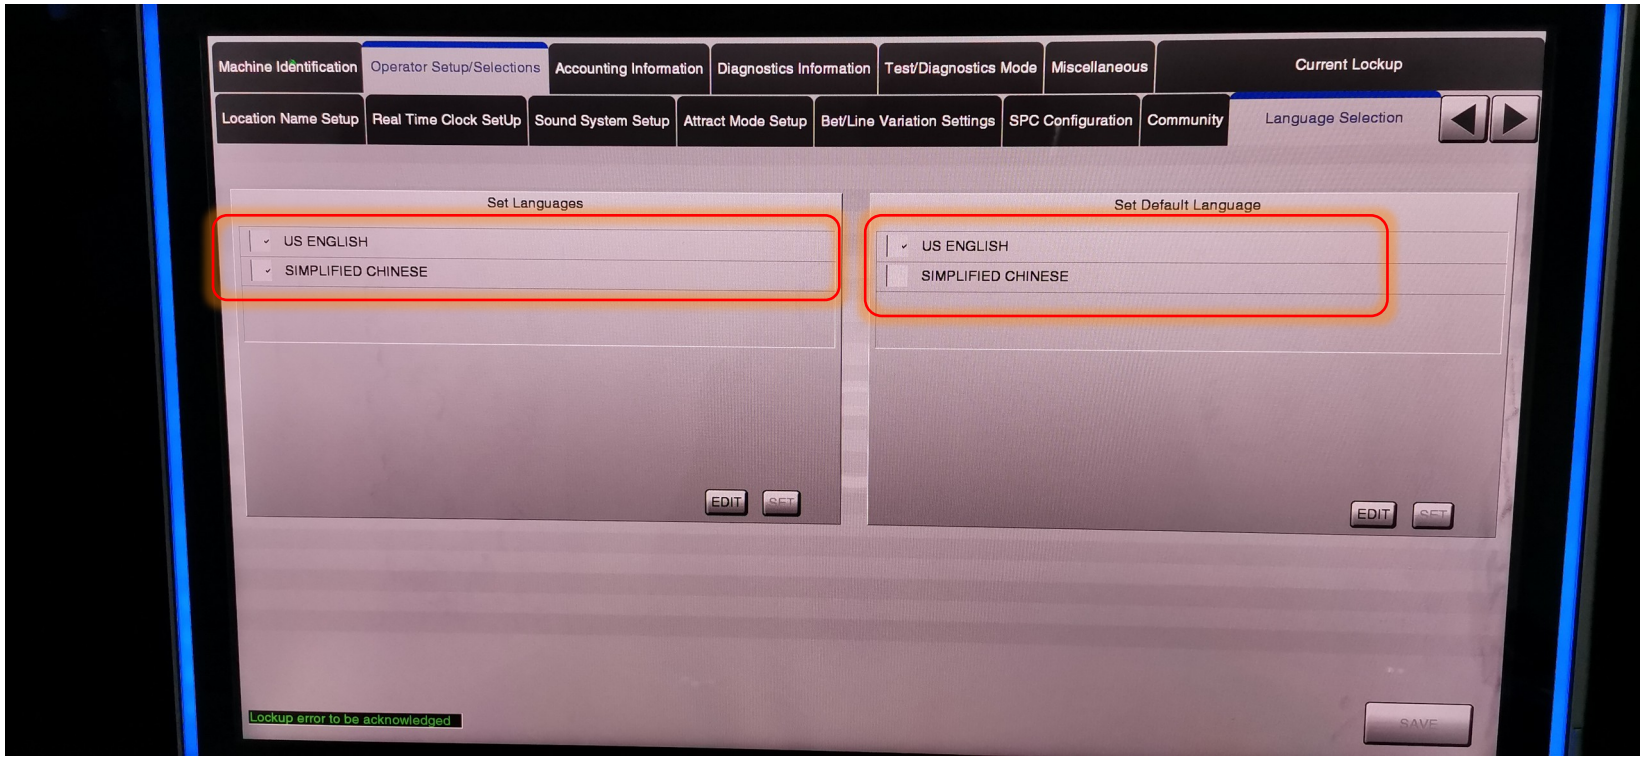

Language Selection


On the Languages box

- Tap Edit
- Tap Simplified Chinese
- Tap Set

On the Default Languages box


- Tap Edit
- Tap US english
- Tap Set


Tap Save

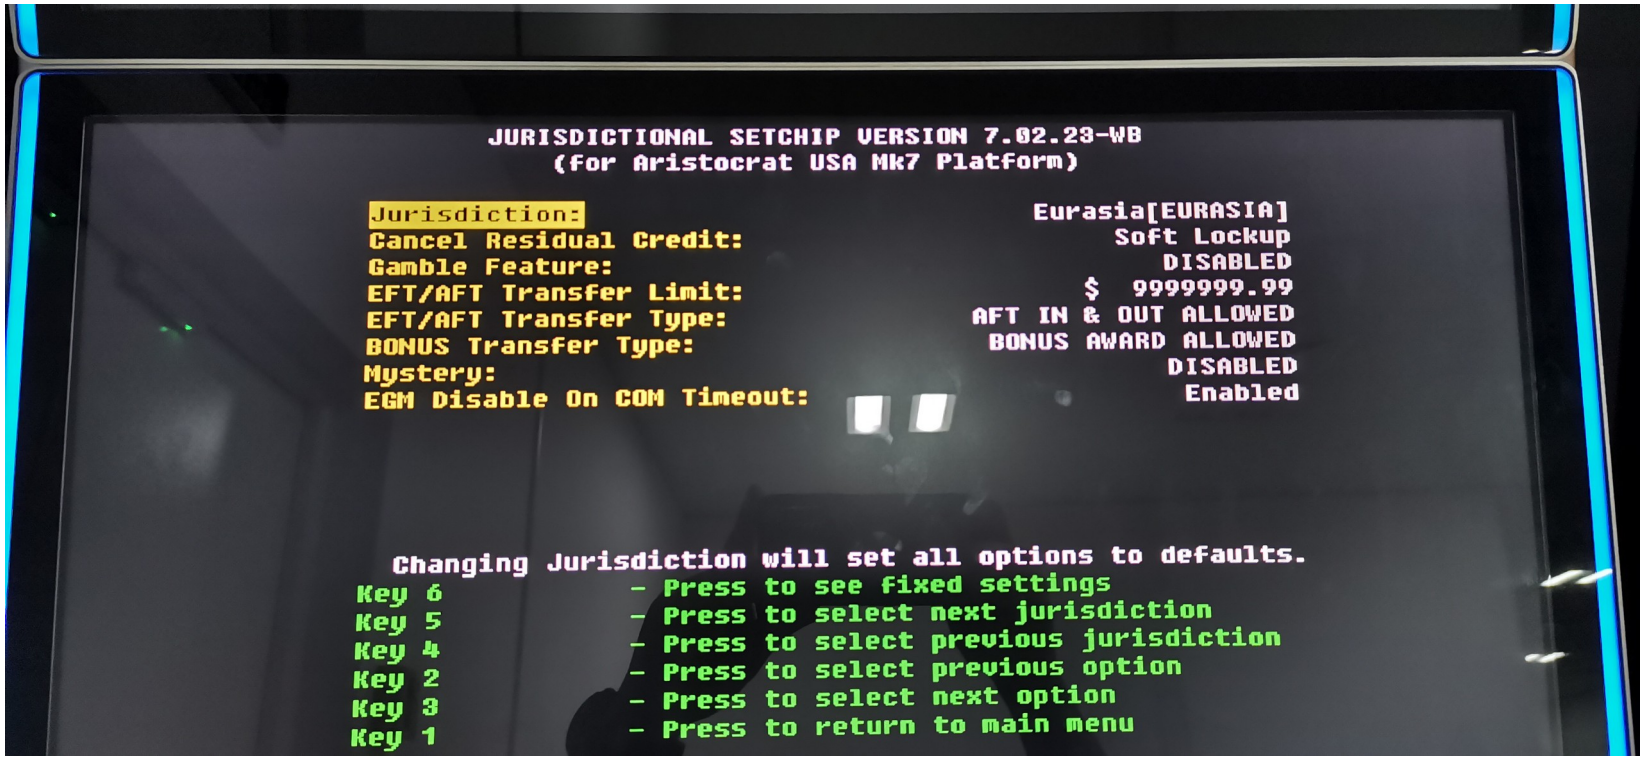

Jurisdiction Options


Money Setup Menu

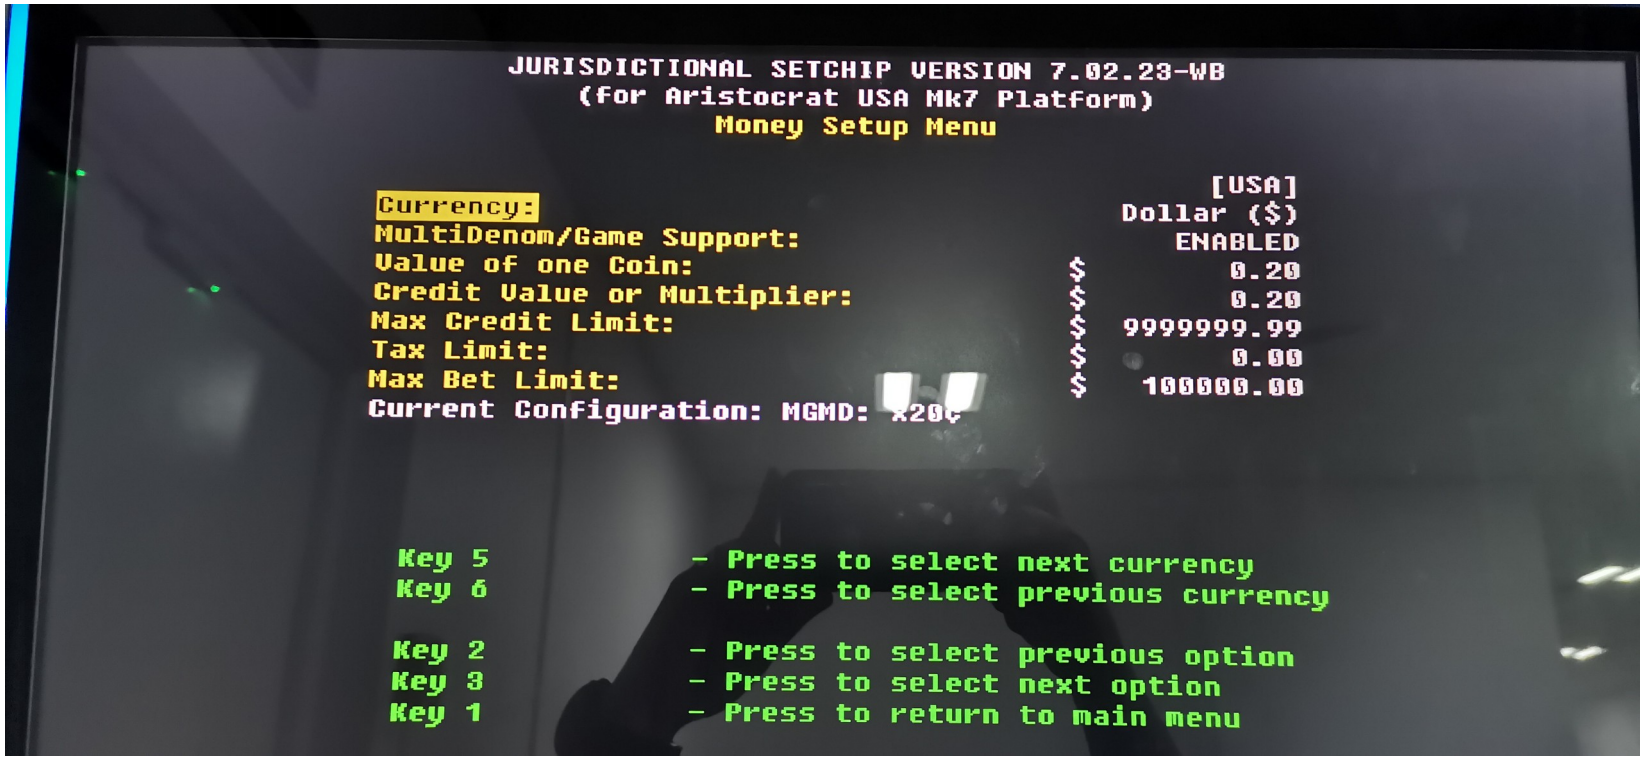

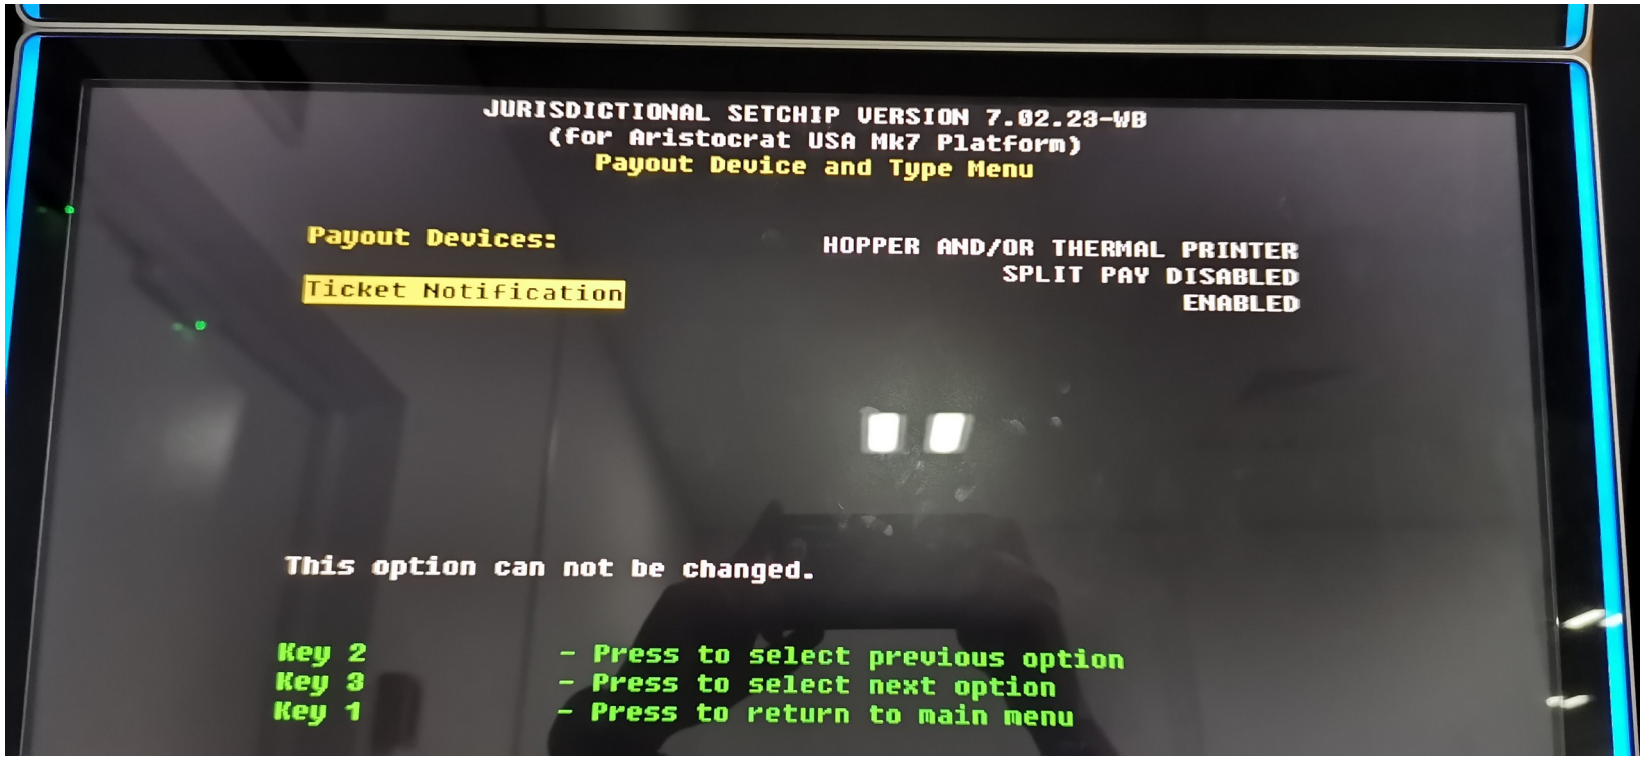



Payout Device and Type Menu

Miscellaneous Options Setup Menu

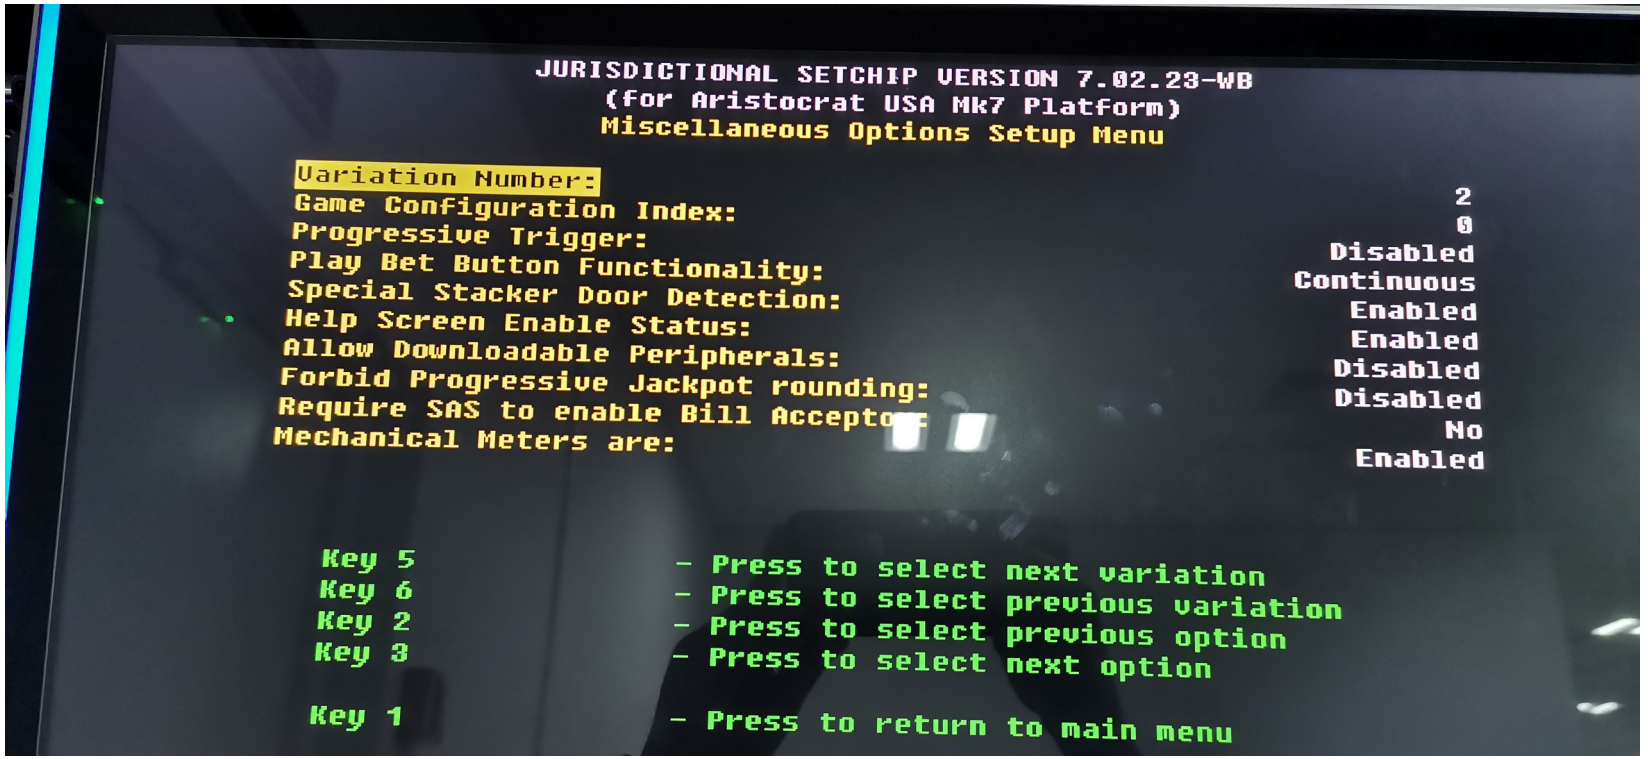


Additional Options Setup Menu

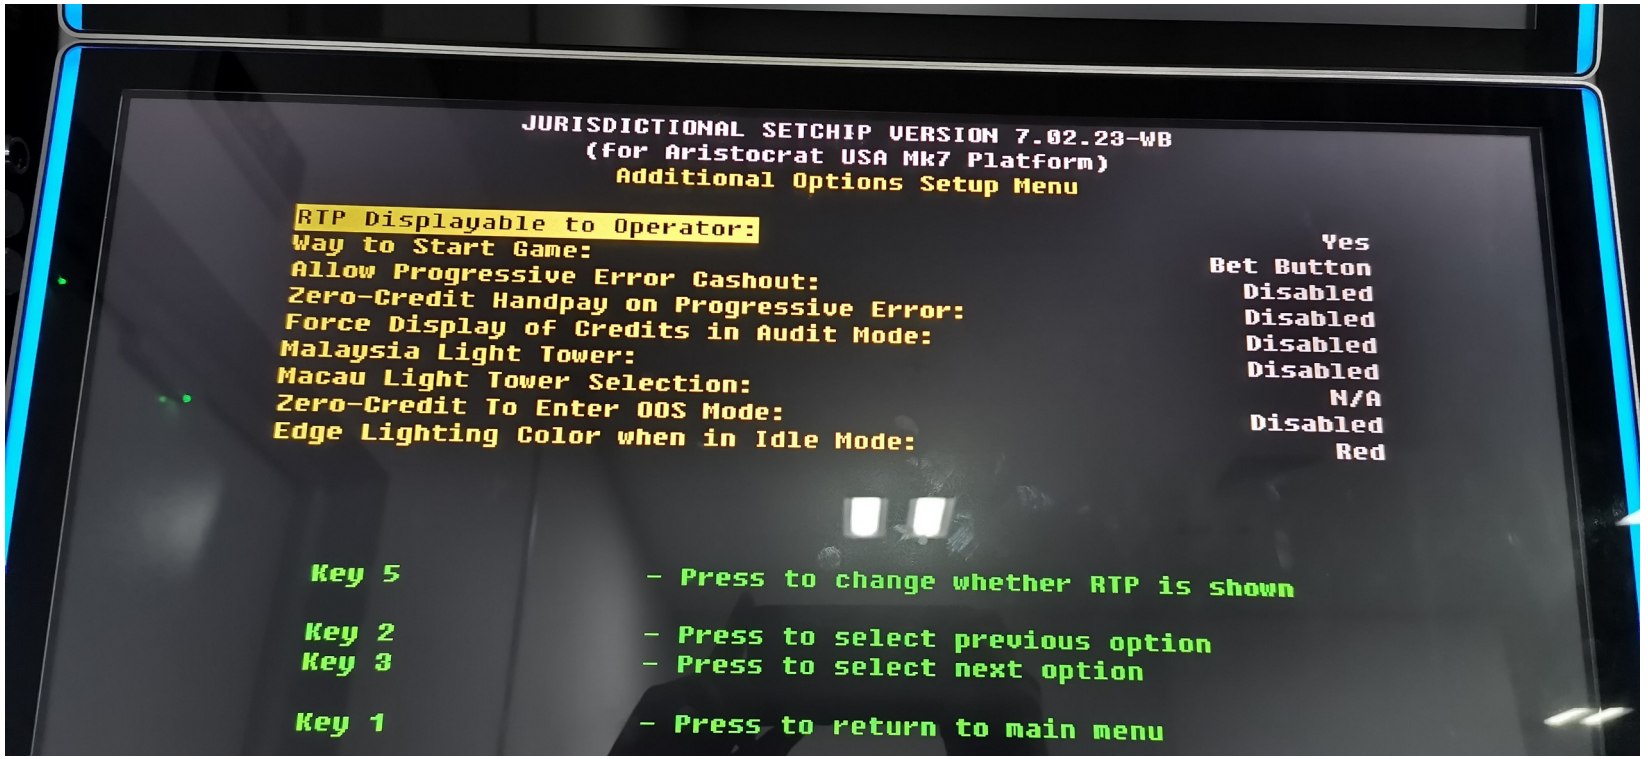

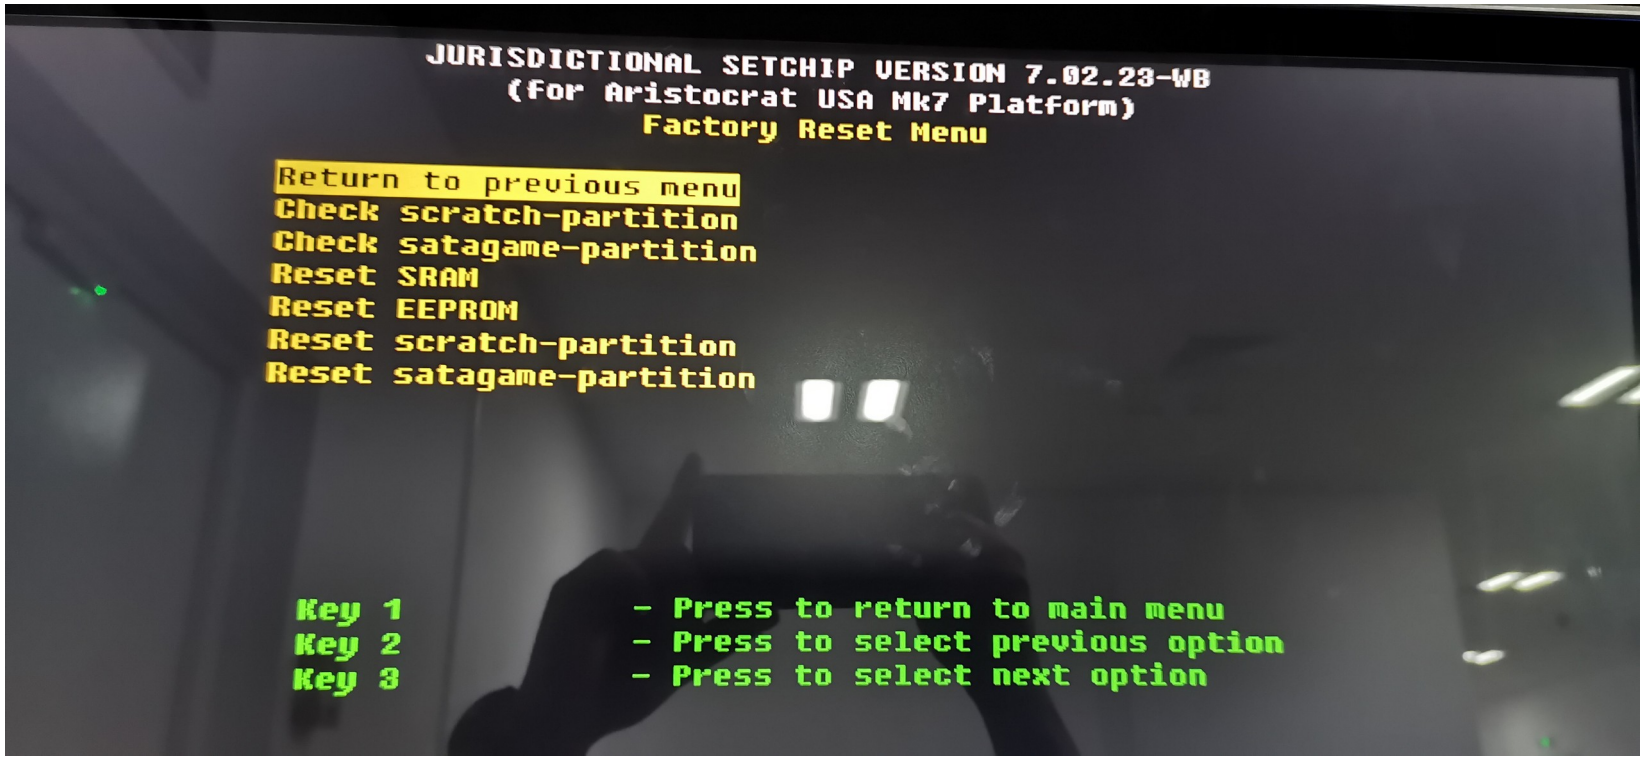

Factory Reset Menu

WARNING do not touch this unless given permission.

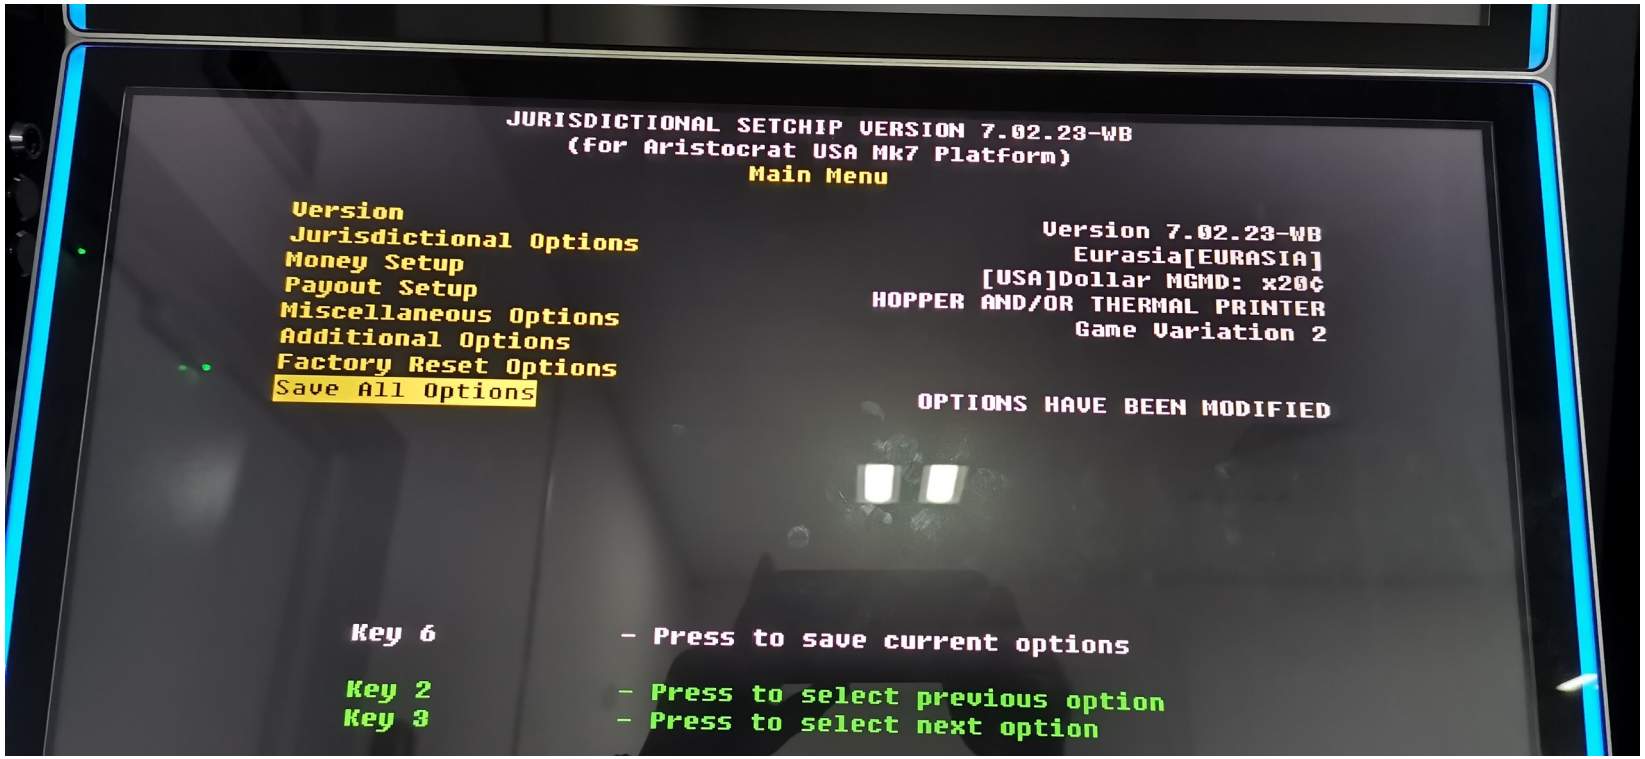

Main Menu

Select SAVE ALL OPTIONS, if, there are changes made on the settings.