CORONA
RESORT & CASINO

Slot Technical Department

Novomatic FV640 F2 Impera - RAM Clear Procedure

Technical Luke

Febuary 1, 2025

Power Switch



. Power off machine





Ramclear button

. **Open Logic Door**

. **Press Ram clear button**



USB Ramclear






. Close Logic Door

. Insert USB Ram clear to Logic box


. Power on machine

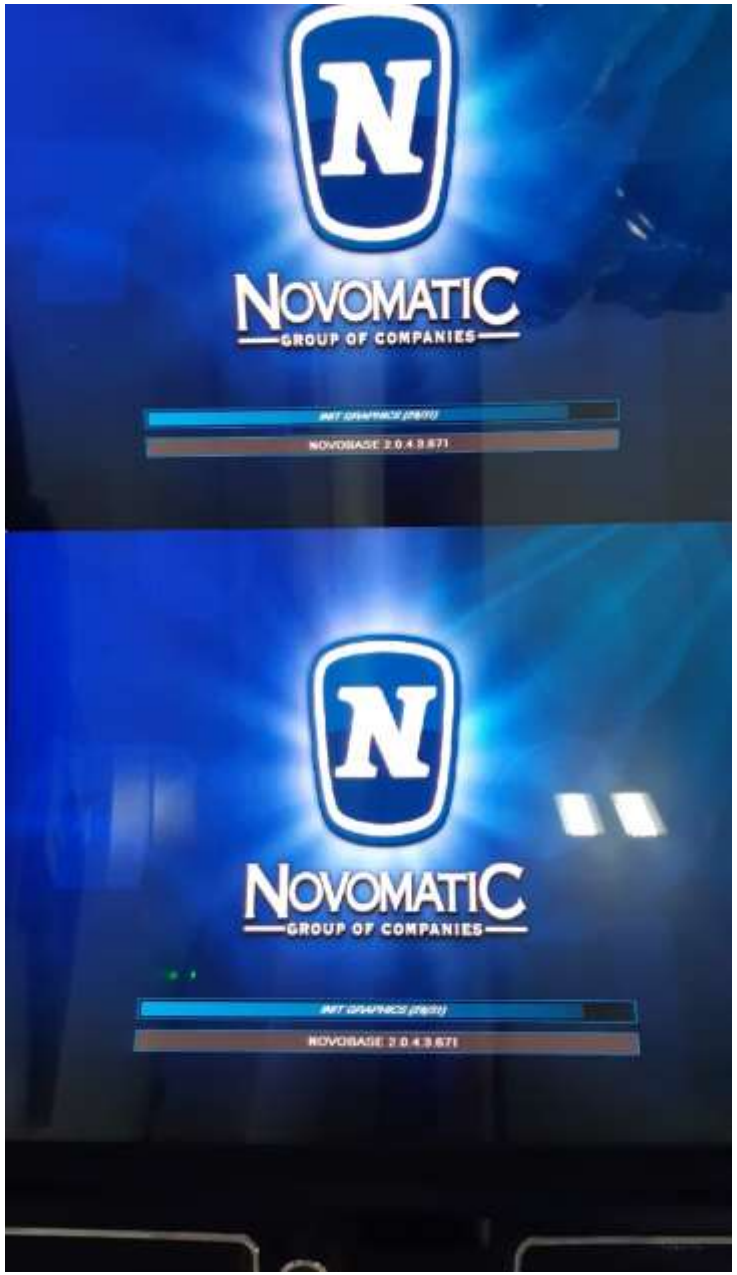




. Waiting loading

. After that turn audit key to perform ram clear machine

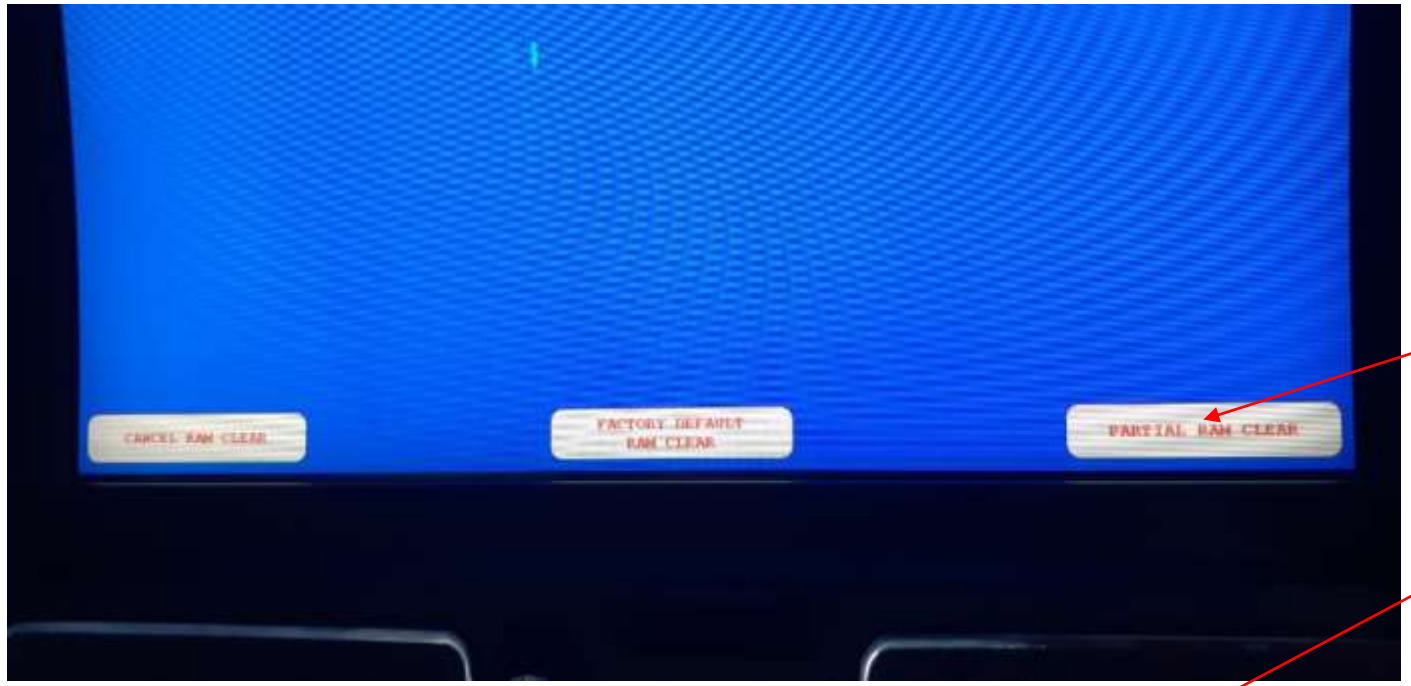


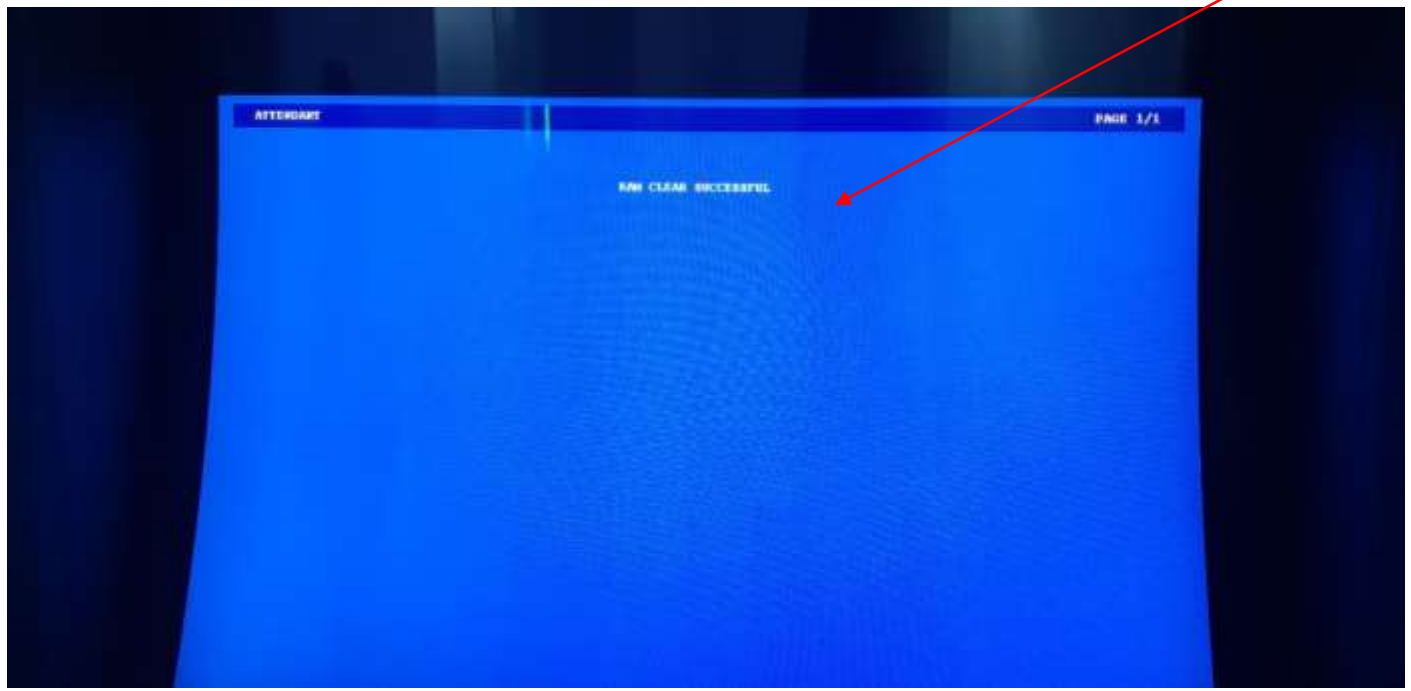

. Chose “Partial Ram clear

. Waiting until machine show “Ram Clear Successful”.

. Remove USB Ramclear

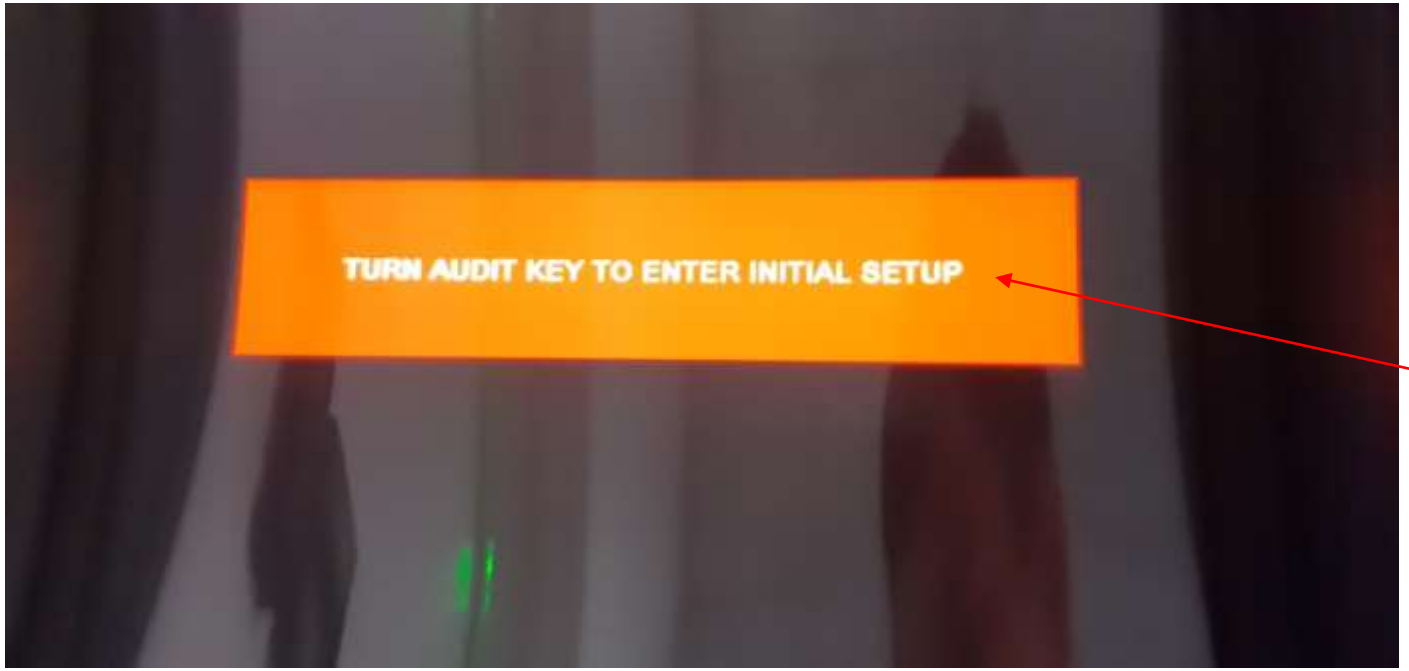




. Turn audit key to go to setting machine

. Set RTP

. Set denomination and press next page




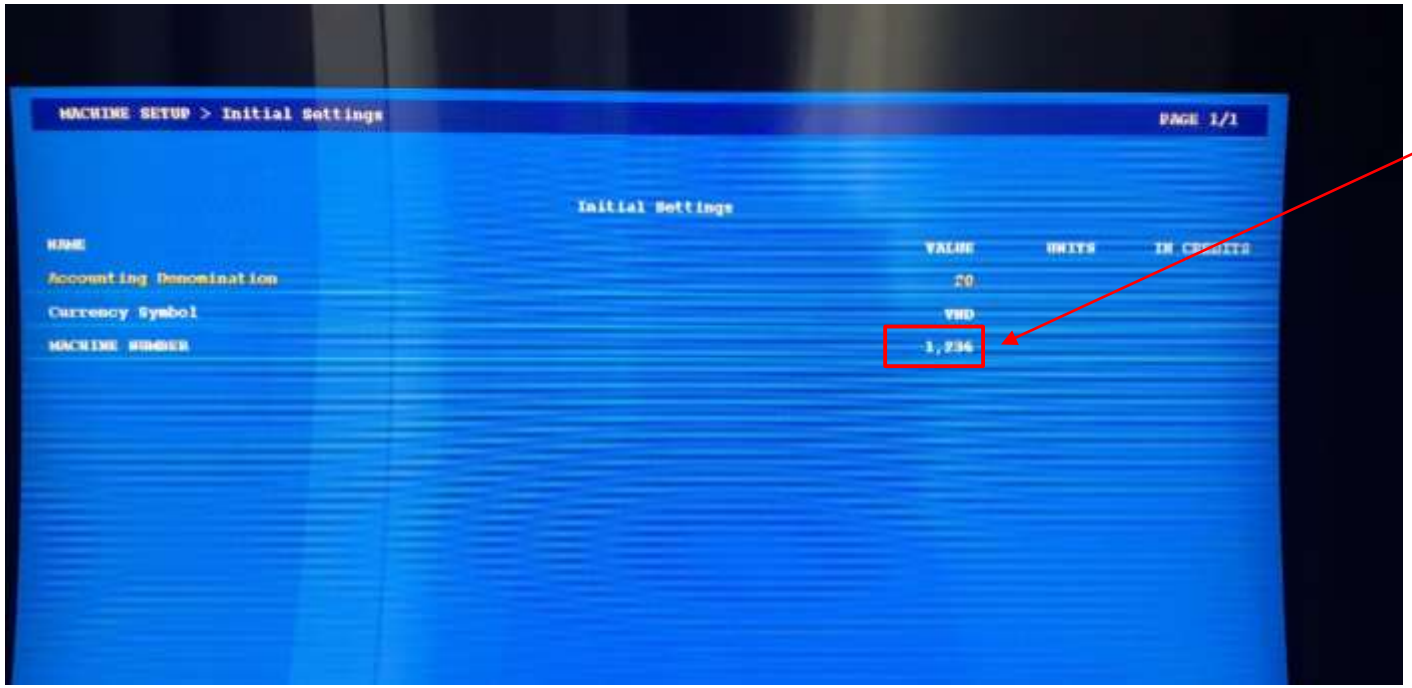


. Set Max Credit, Max Credit In, Max win to credit as per master file.

. Set Printer is Ithaca and port is COM-1

. Go to Initial Settings to set Machine number as asset number and Accounting Denomination

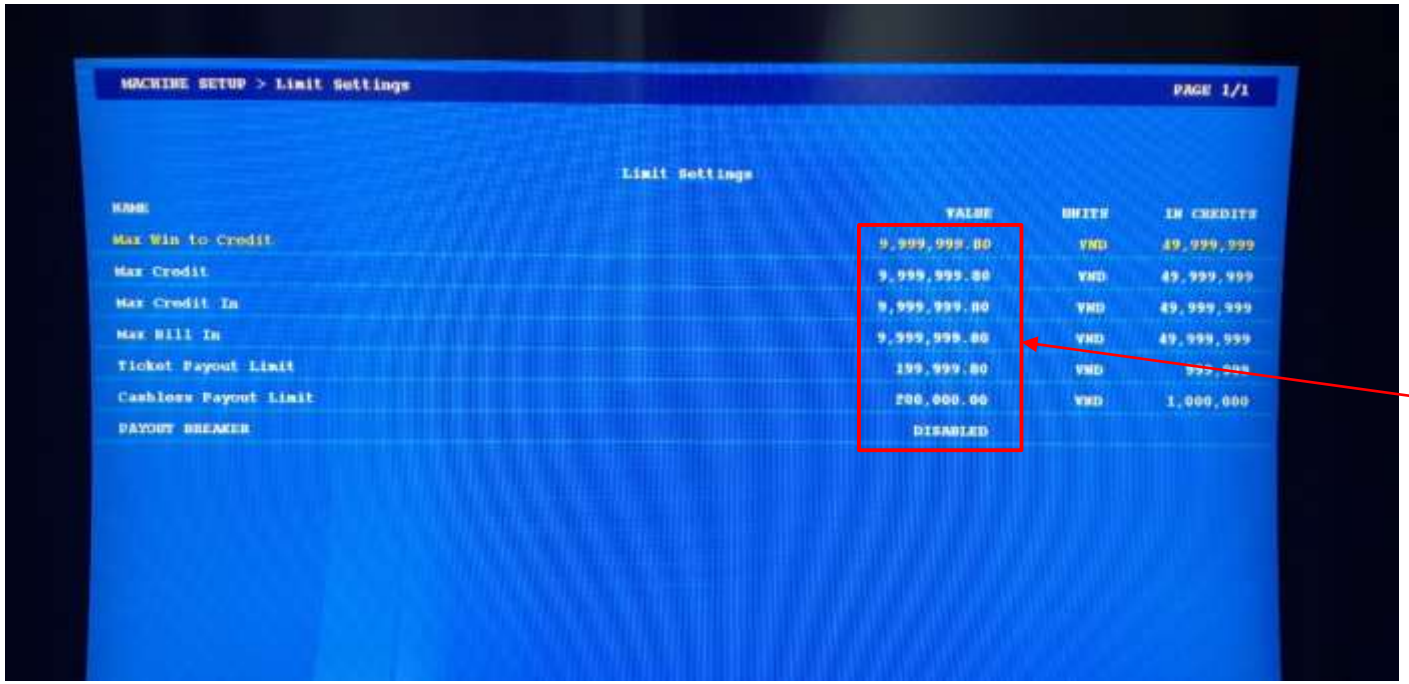


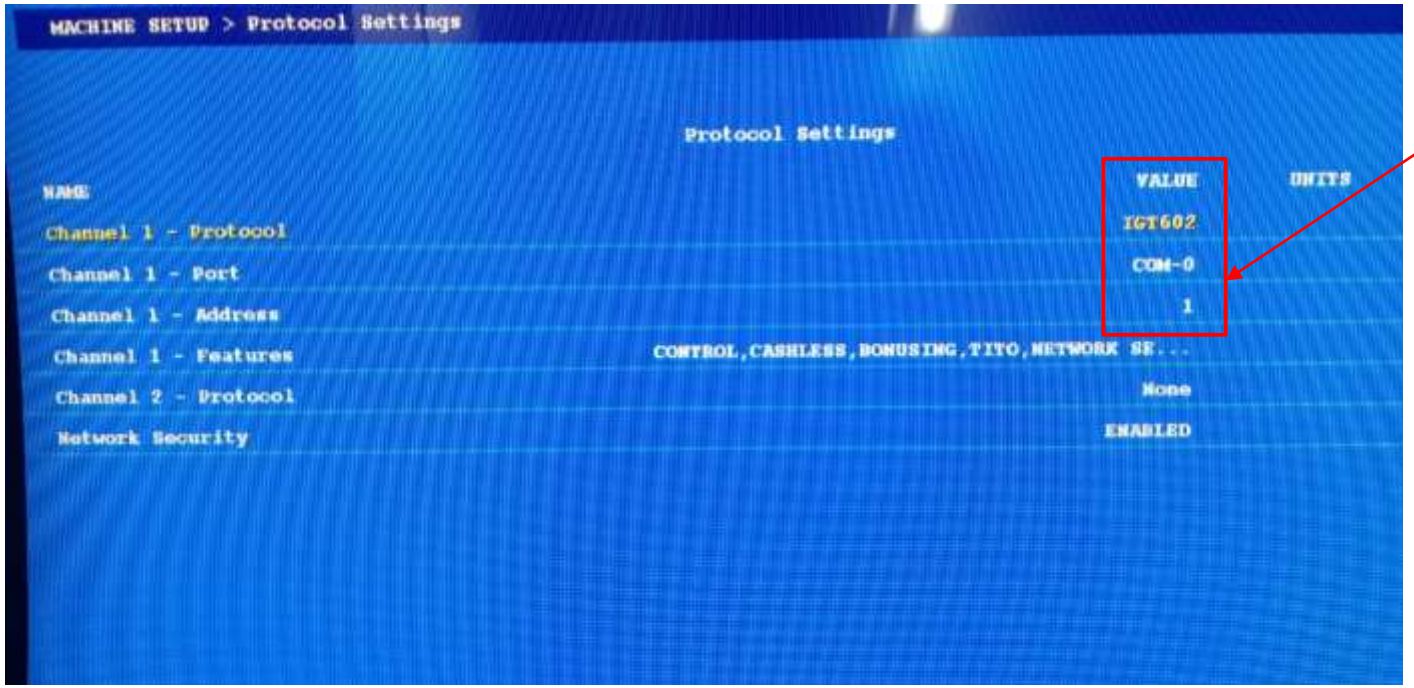

. Go to Limit Settings to set all limit as per master file.

. Select Protocol as this picture




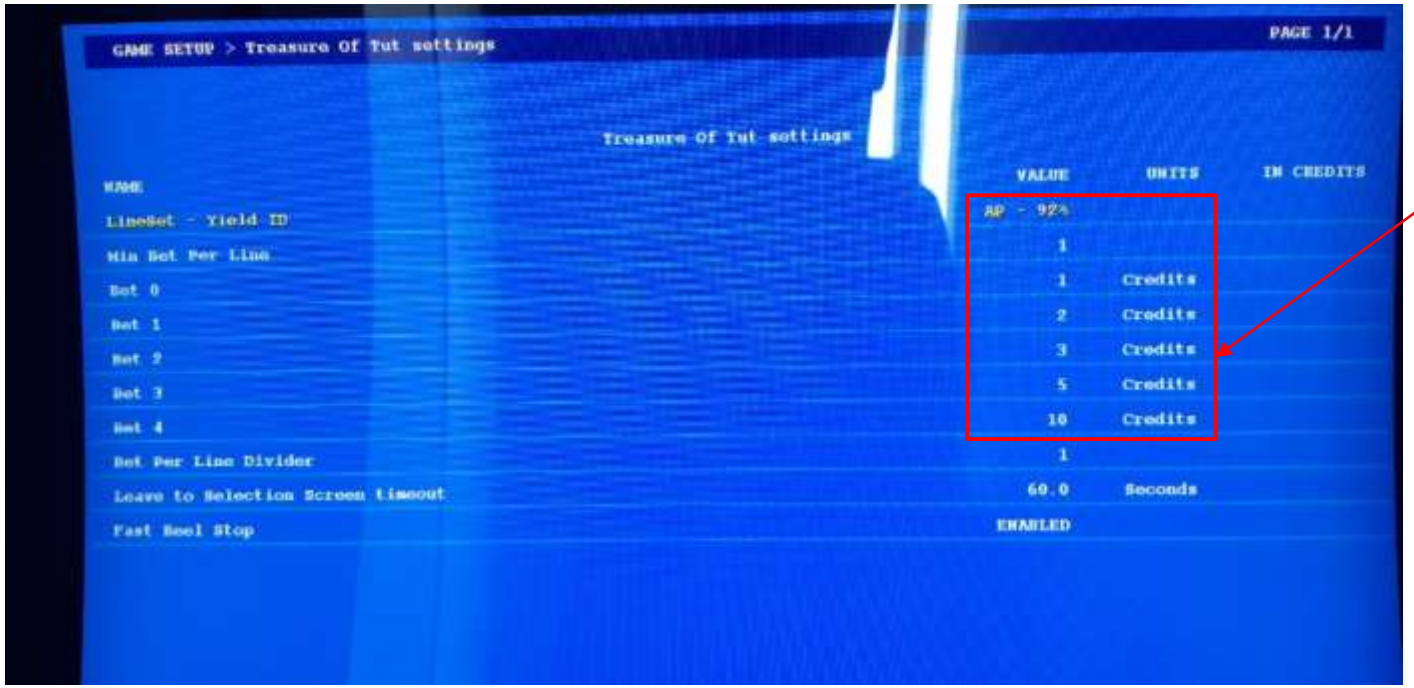

. Go to system settings set Decima Separator is “. (dot)” and Thousand Separator is “, (comma)”


. Go to game setup set Bet value as per master list



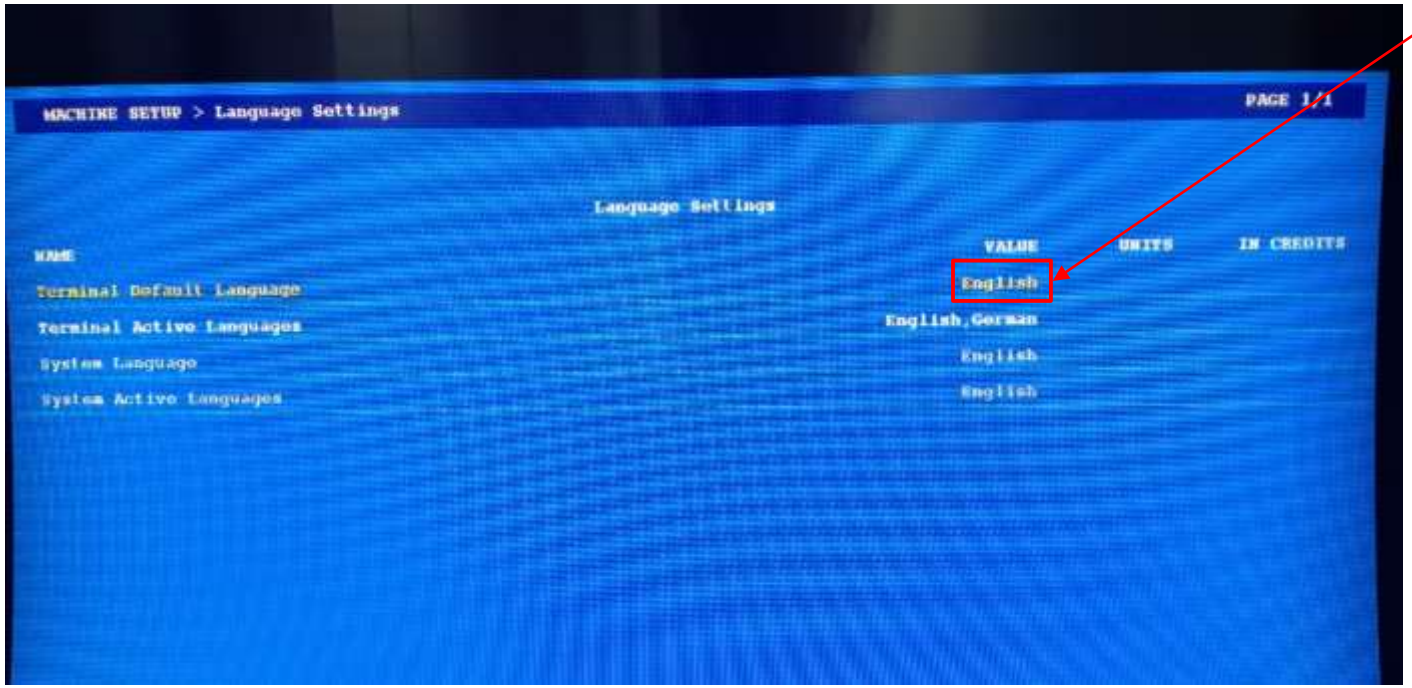

. Set Currency to VND and custom symbol is C$

. Select language default is English, Active language is English and German

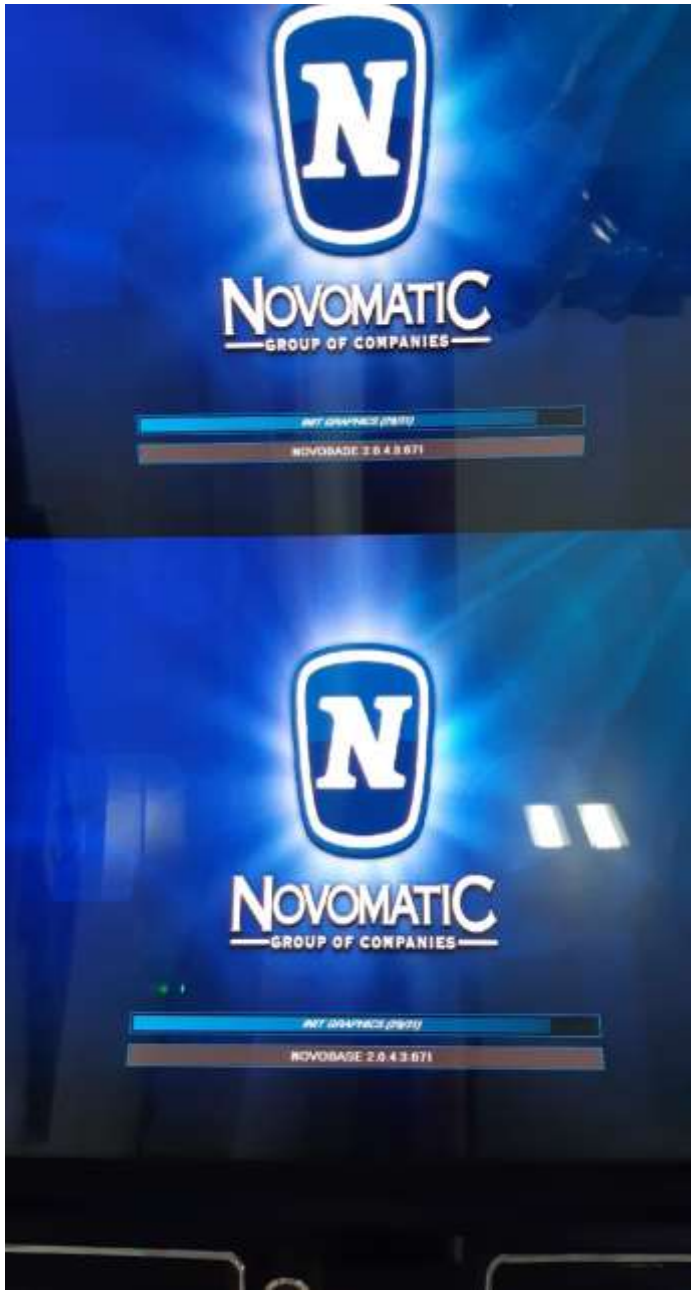

. Turn audit key and waiting machine loading.

. Done