Slot Technical Department

Aristocrat RAM Clear Procedure with Worldbase v. 5.04

Technical Luke

January 1, 2025



Aristocrat Helix WorldBase 5.04 (StandAlone)



Maindoor lock




Power Switch

- **Open the main door of the machine to access the logic box and turnoff the main power switch**



Logic Box door

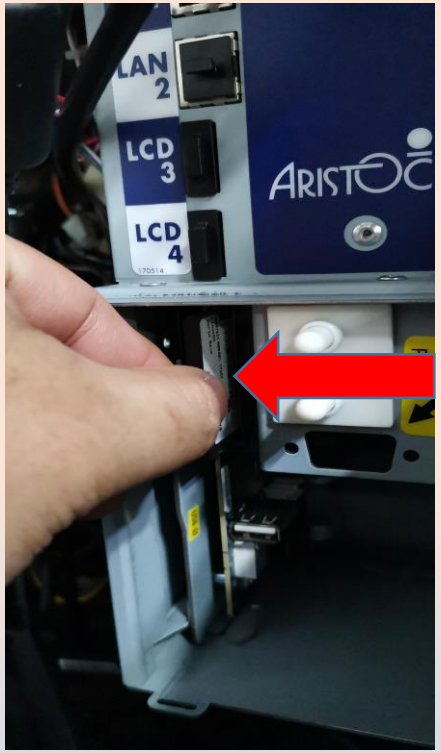

Cfast card



- **Open the Logic box door**
- **Push-in and Pull-out to remove the Cfast Card from the cf card slot**
- **Verify the World Base platform version on Cfast Card**
- **Based on the Set Chip Table below, use the Set Chip version accordingly**



Set Chips of Aristocrat installed at Corona Casino




Set Chip for worldbase 5.04-1.00.2

- **Aristocrat Set Chip Table**

Set Chip Version	World Base Platform
7.02.17	5.00.0 – 1.00.3 5.01.0 – 1.00.3 5.01.1 – 1.01.0 5.03.1 – 1.01.3
7.02.23	5.04-1.00.2
7.02.50	5.04-1.00.0 or Higher


- **Select Set Chip version according to the World Base platform of the machine**

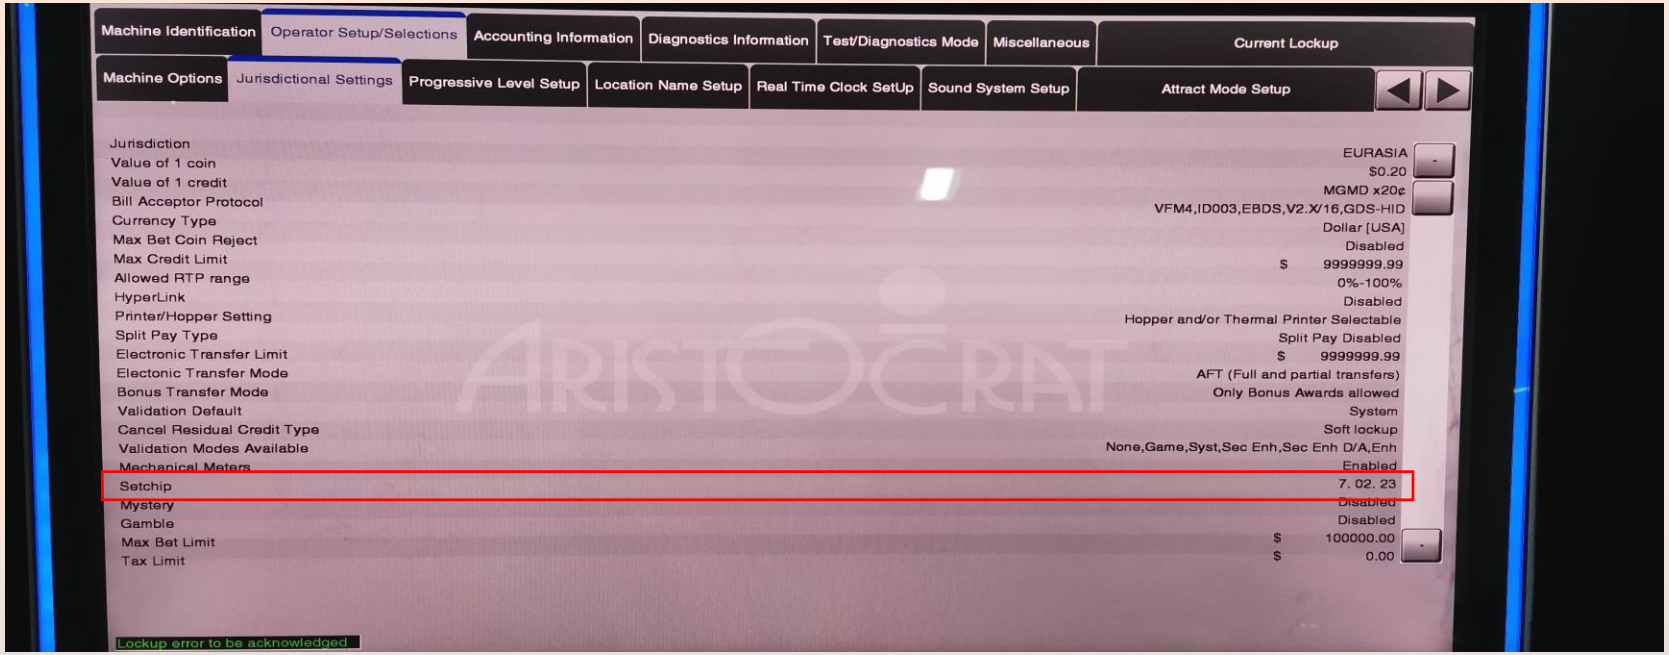

1. Turn audit key
2. Select Operator Setup/Selections
3. Select Jurisdictional Settings and locate Setchip
4. Insert Set Chip card on the cfast card slot
5. Power-on machine





Or you can verify the Set Chip version on the Jurisdictional Settings under Operator Setup/Selection of the Audit Menu

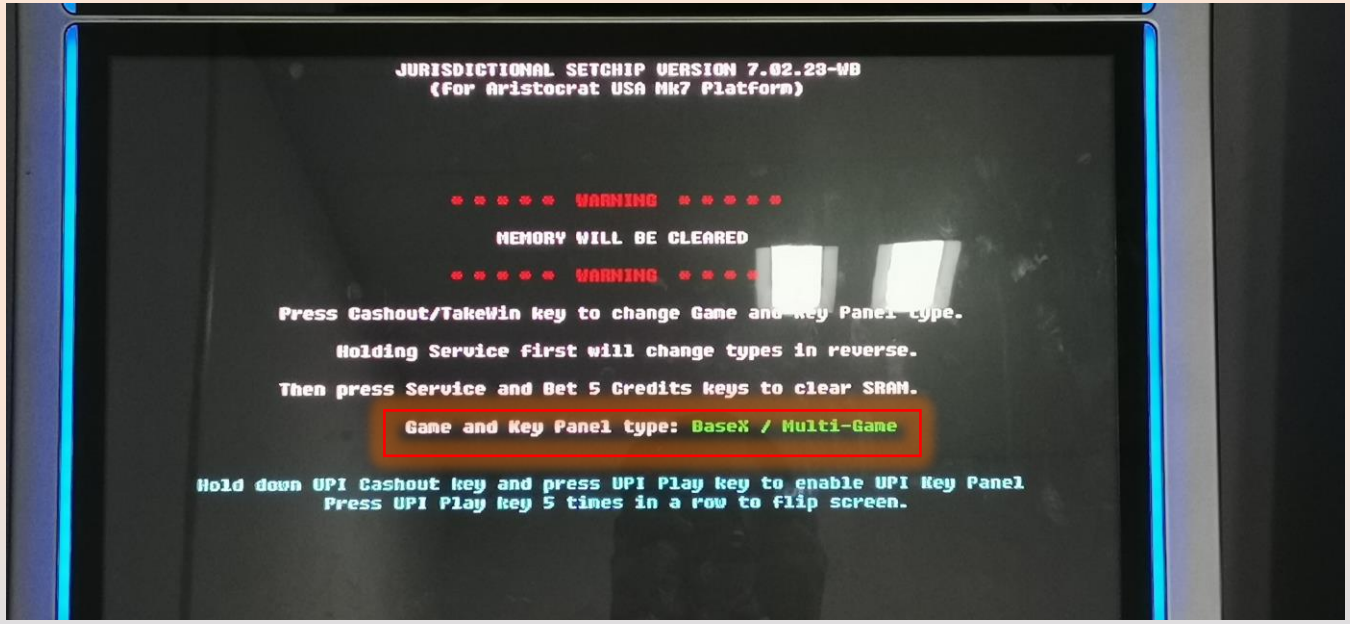




- **The machine will display the following screen**
- **Select “*BaseX / Multi-Game*” by pressing Cashout / Takewin**
- **Press Service and Bet 5 buttons at the same time to Clear Ram**

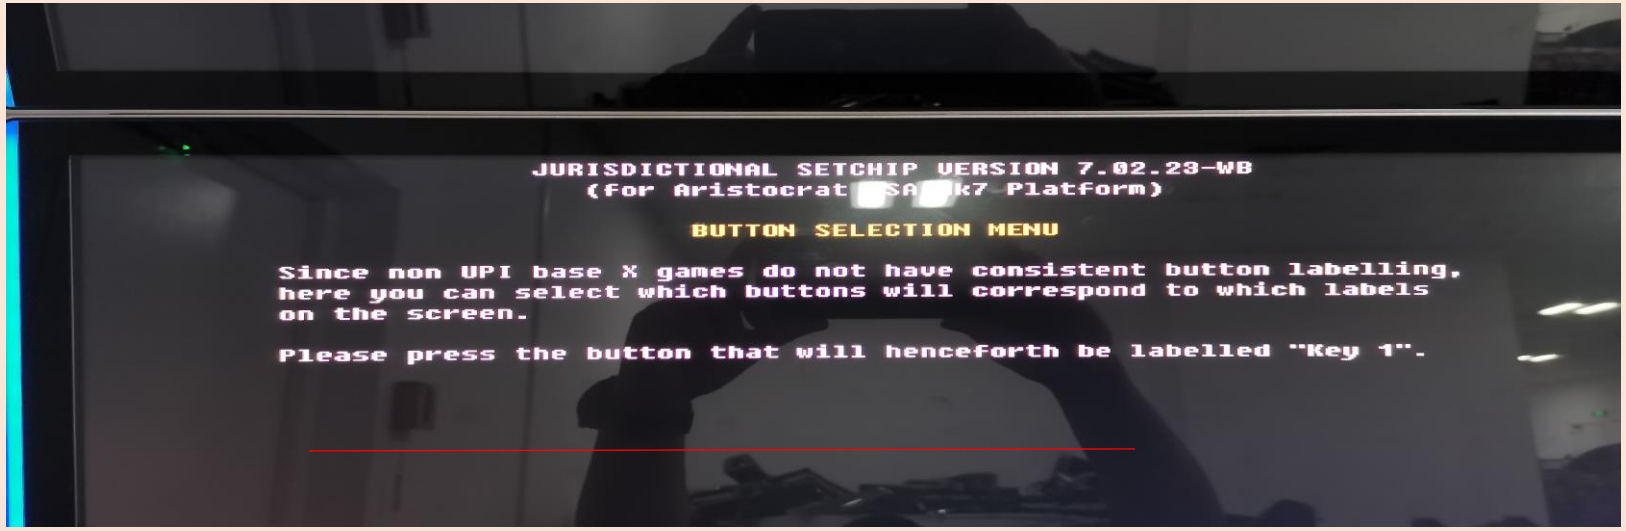


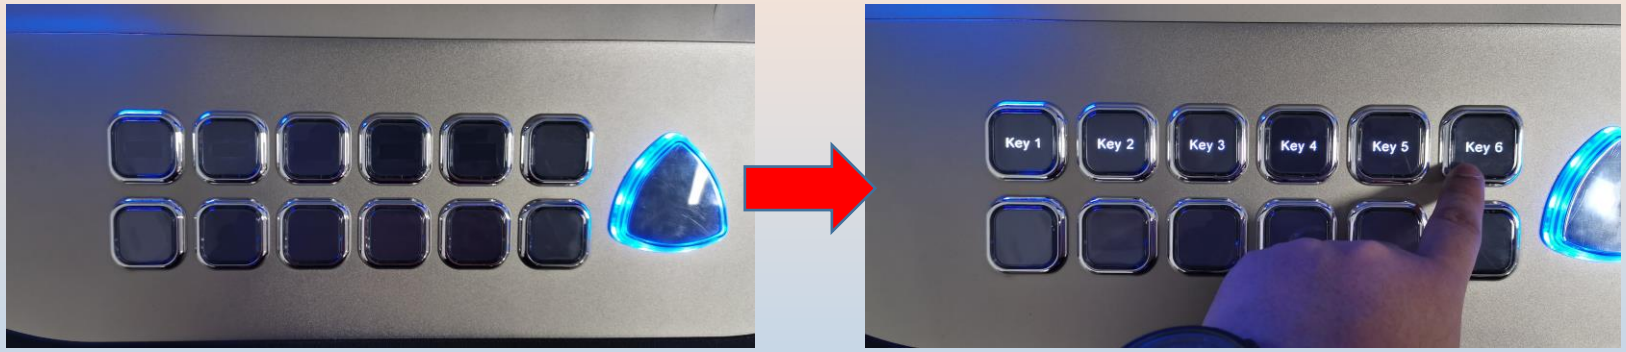

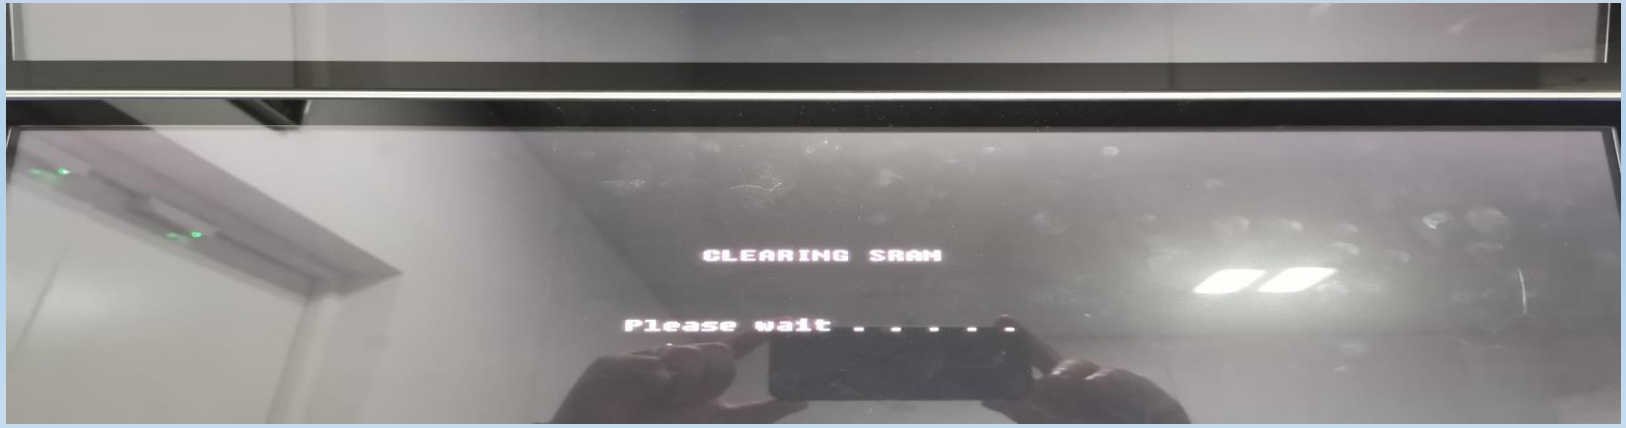

Labelling Keys 1 - 6


- Press the button starting from Top Left Button to the Top Right Button
- After the pressing each 6 button the Label should be same as per photo below
- After pressing the last button labelled “**Key 6”**, the machine will start clearing Ram.

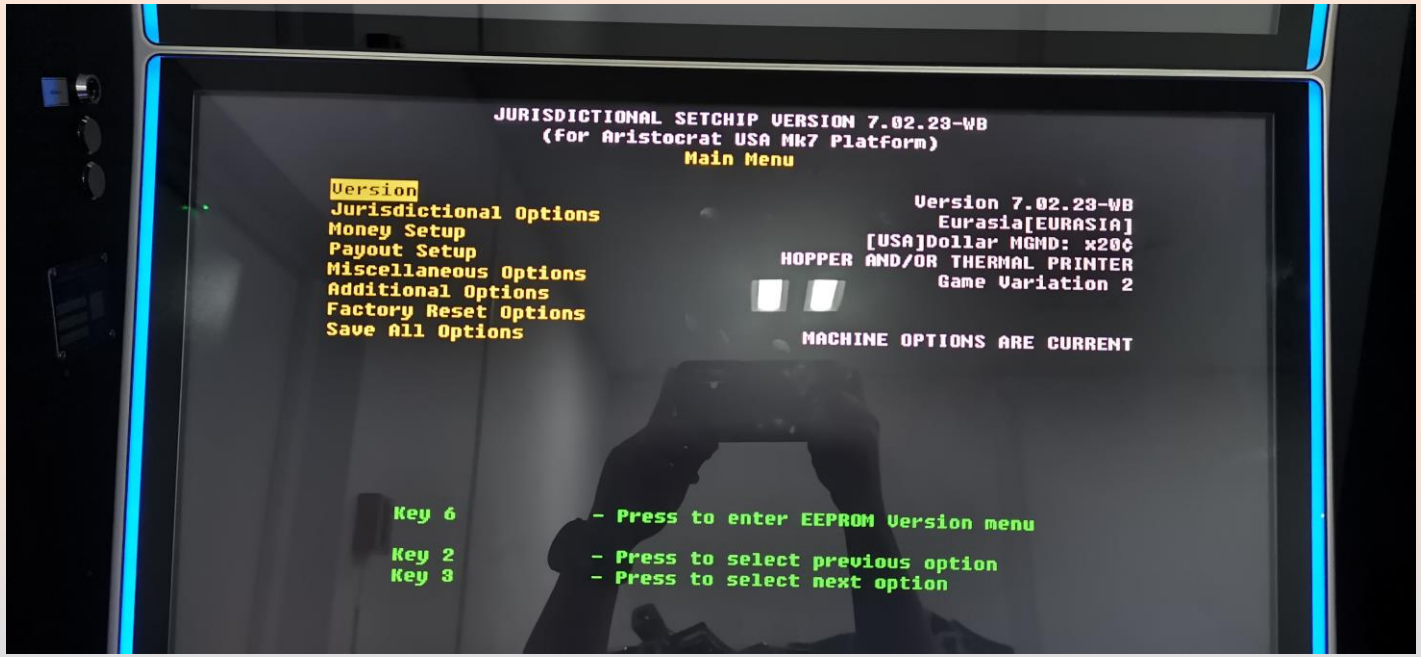

- **Jurisdictional Setup Menu will be displayed on-screen.**
- **Ram Clear has been done at this point.**
- **Power off machine**
- **Remove the Set Chip from**
- **Insert game Cfast card into the cf card slot**
- **Power on machine**

NOTE:

- **If there will be changes of Jurisdictional Settings on this menu, (e.g. Variation, Denomination, etc.) go to page 28**

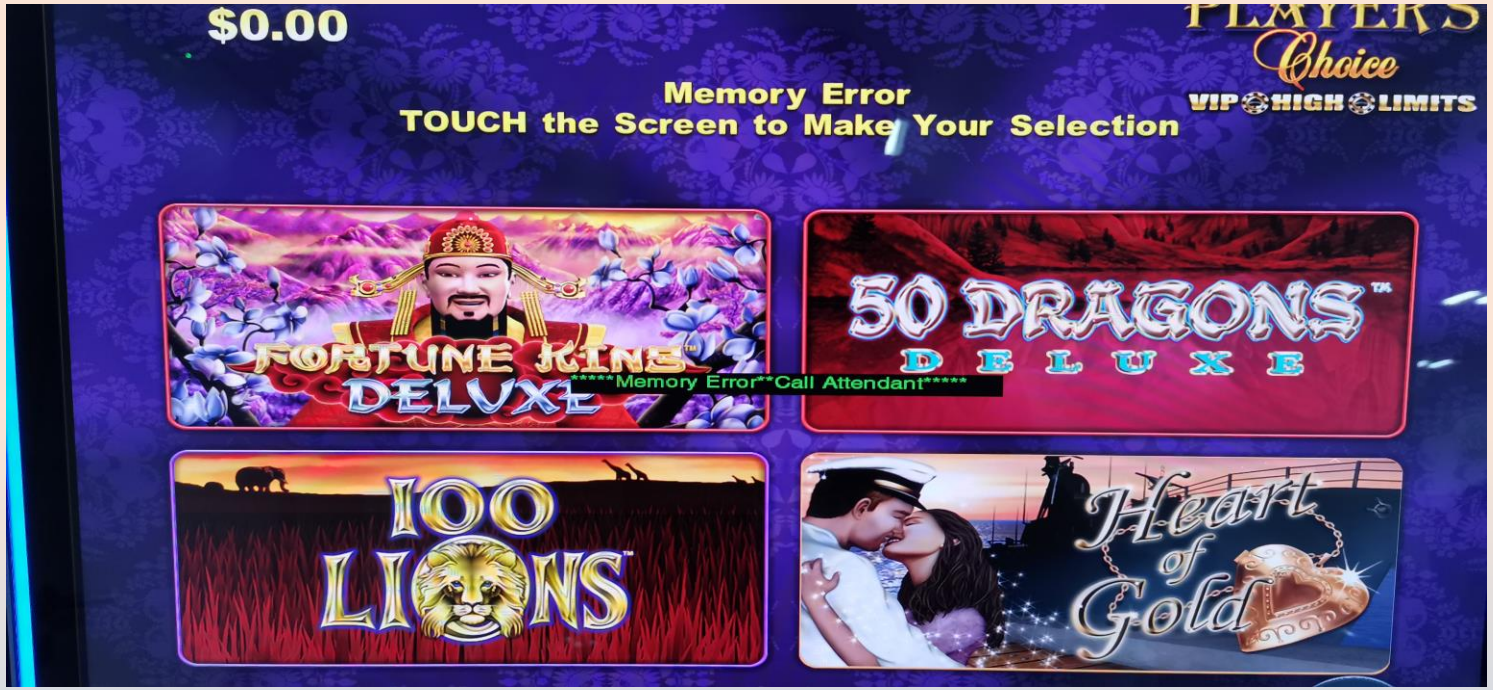




- Upon the game has been loaded, a “Memory Error, Call Attendant” error will appear on screen
- Turn Audit Key to access menu







- **Machine will prompt to select Touch Screen Driver, select “HID Touch Screen”. Used Bet 1 or Bet 2 to navigate**
- **Press Service to Save/Configure**

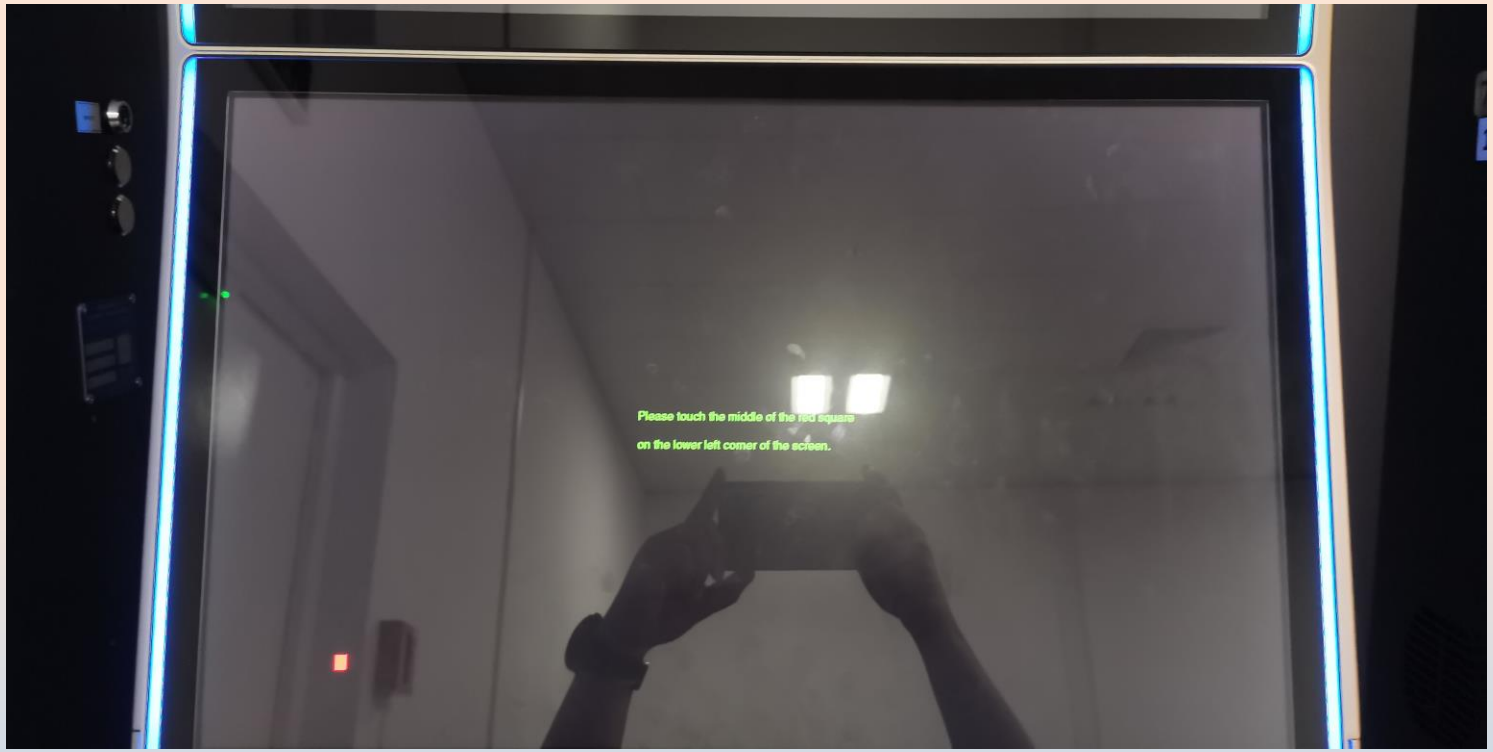


- **Machine will prompt to calibrate touch screen**

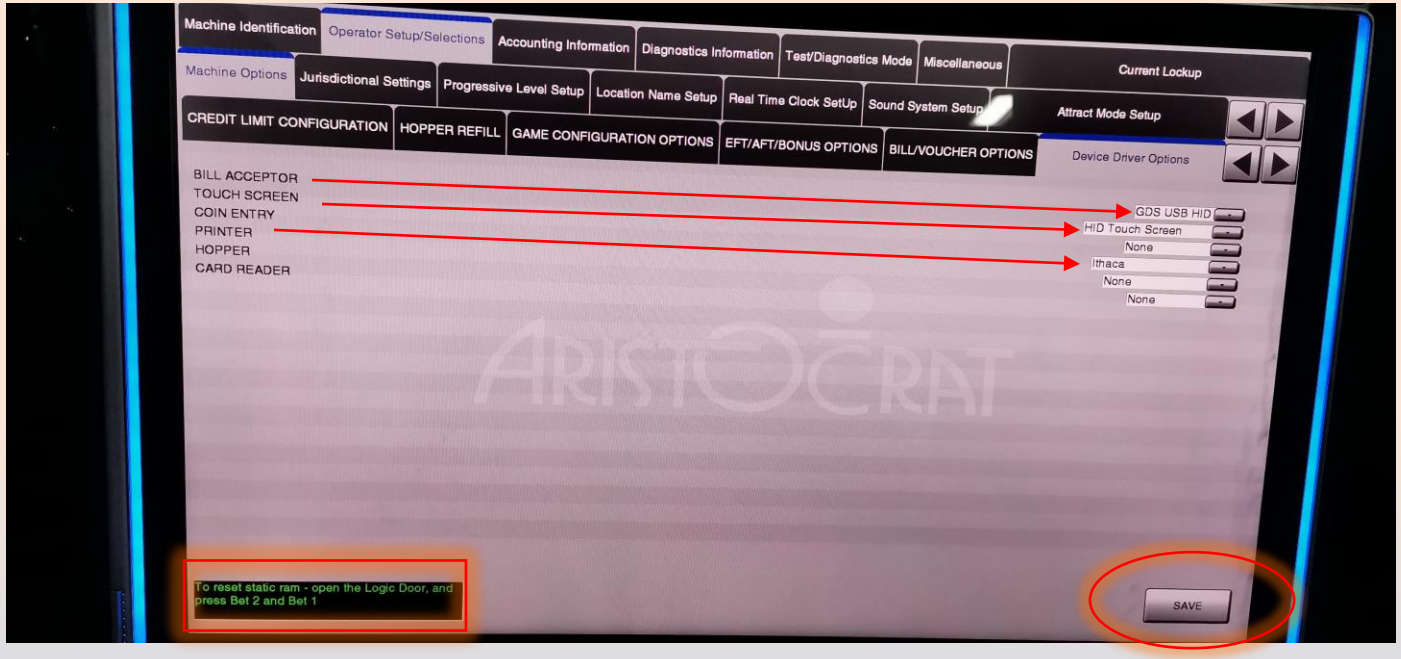

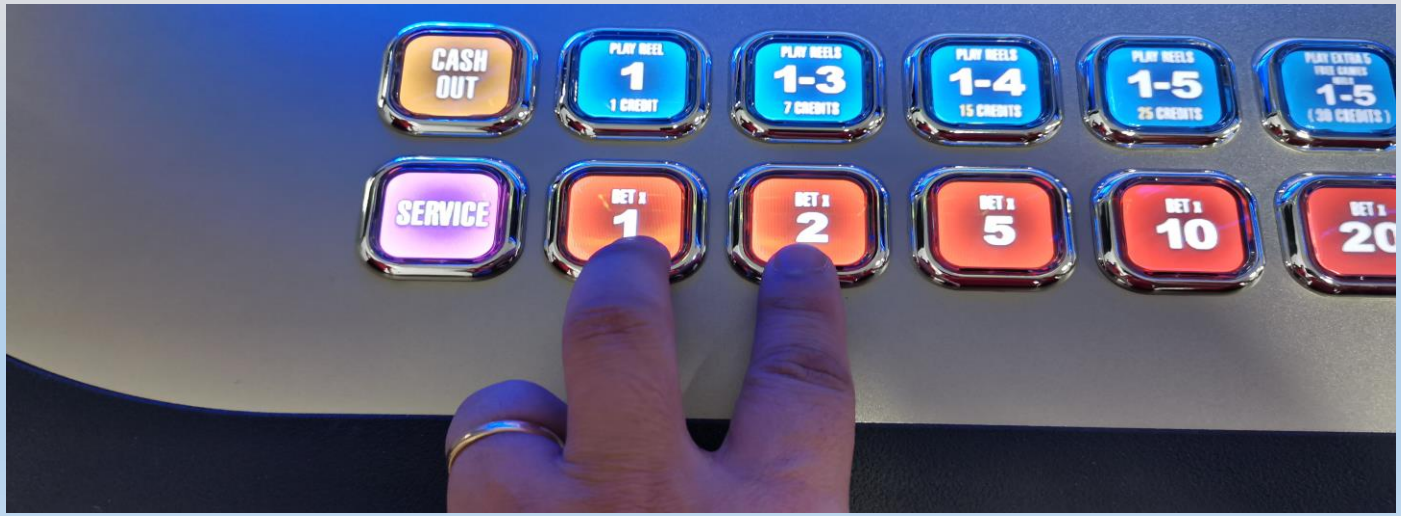


Device Driver Options

- **Under Operator Setup / Selections**
- **Select Machine Options**
- **Set the options as follows (see photo) and tap Save**
- **Press Button Bet x1 and Bet x2 at the same time to clear static ram. Note: logic door must be open**

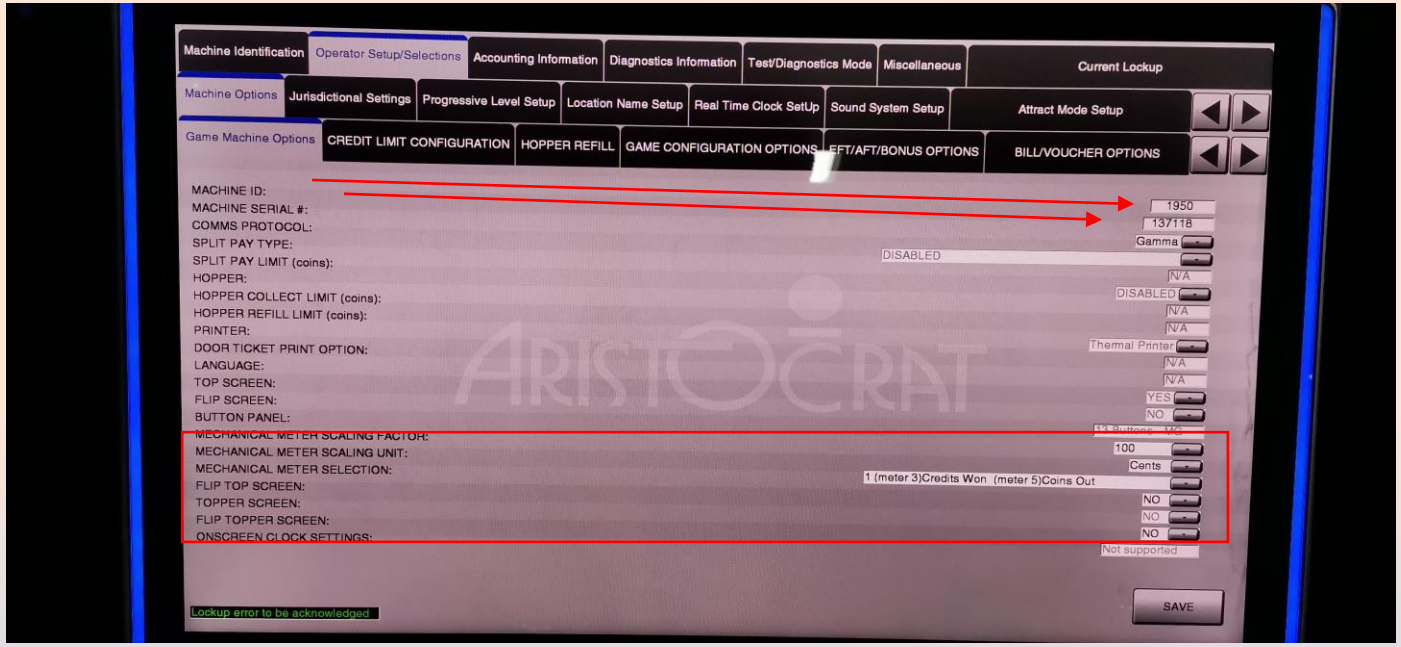


Game Machine Options

- **Set the options as follows (see photo) and tap Save**

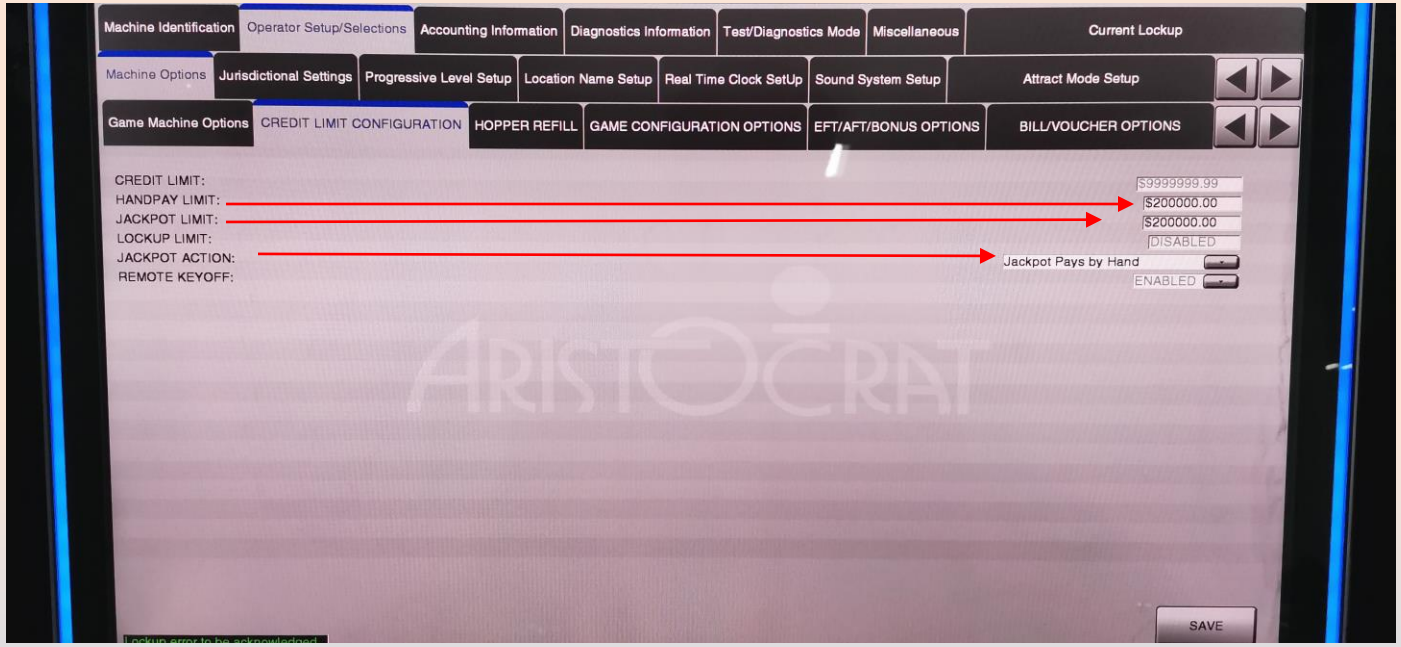


Credit Limit Configuration


- **Set the options as follows (see photo) and tap Save**

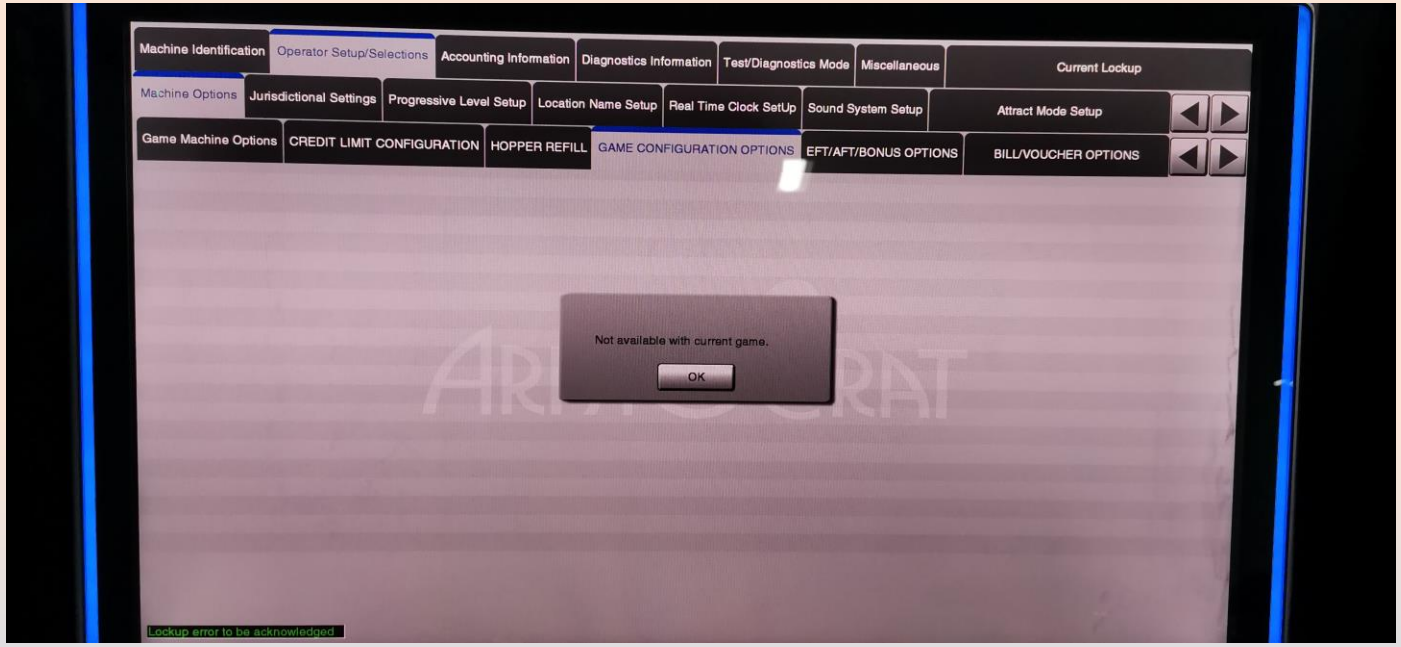

Game Configuration Options

- For this type of game, game config is not available

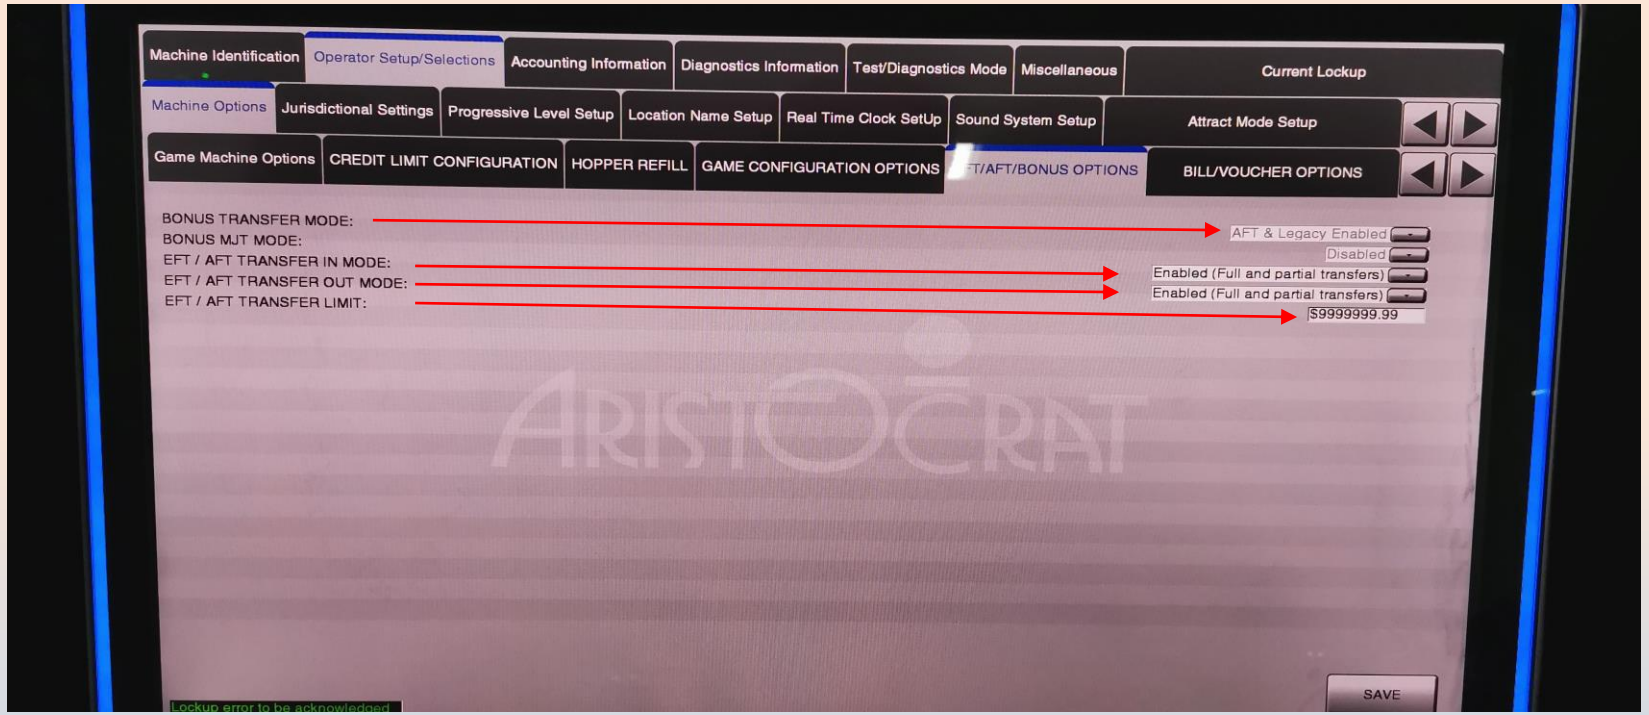

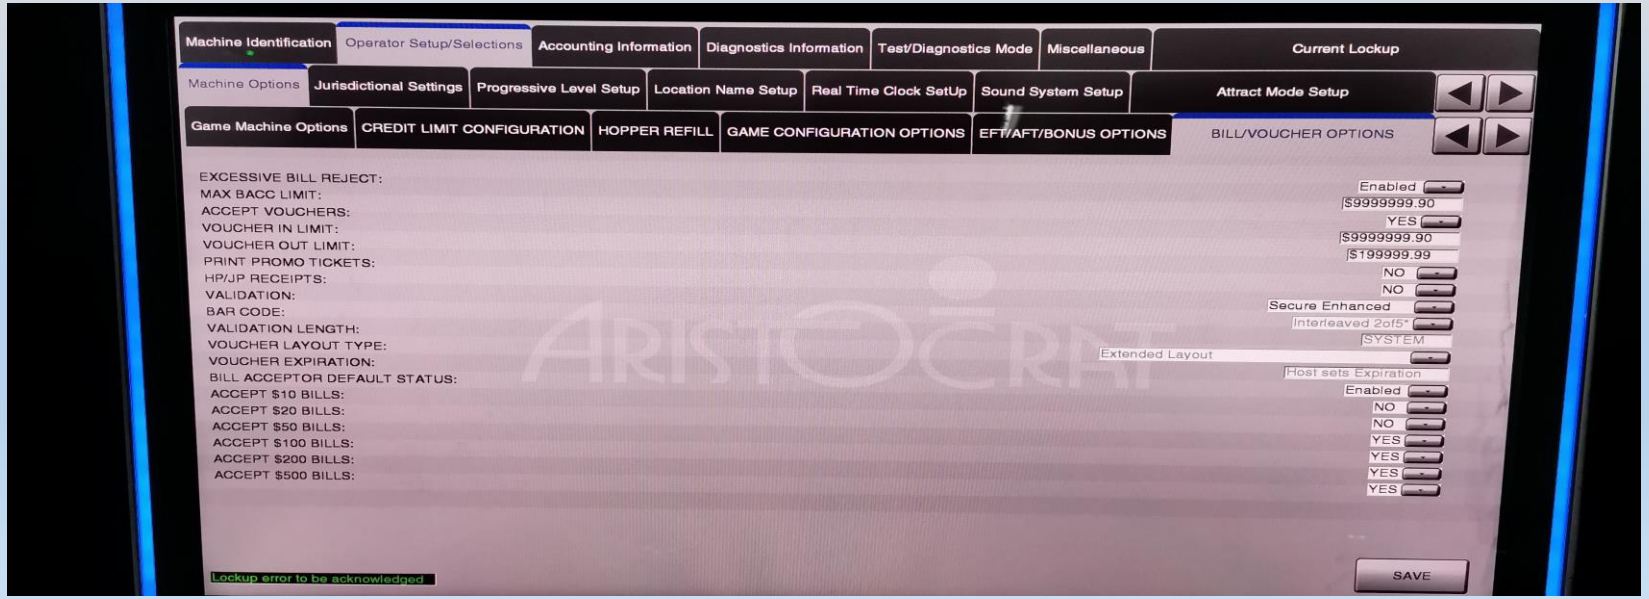



EFT/AFT Bonus Options

- **Set the options as follows (see photo) and tap Save**

Bill Voucher Options

- **Set the options as follows (see photo) and tap Save**

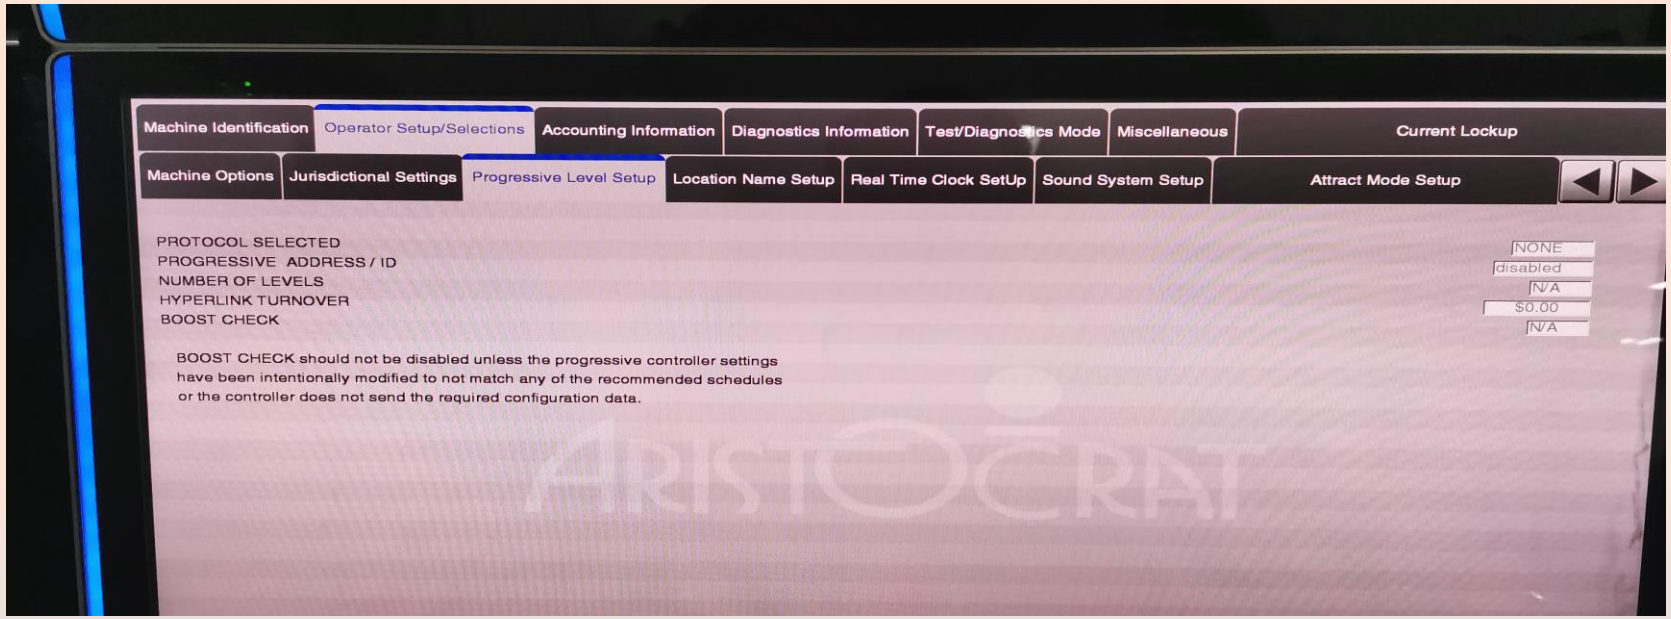

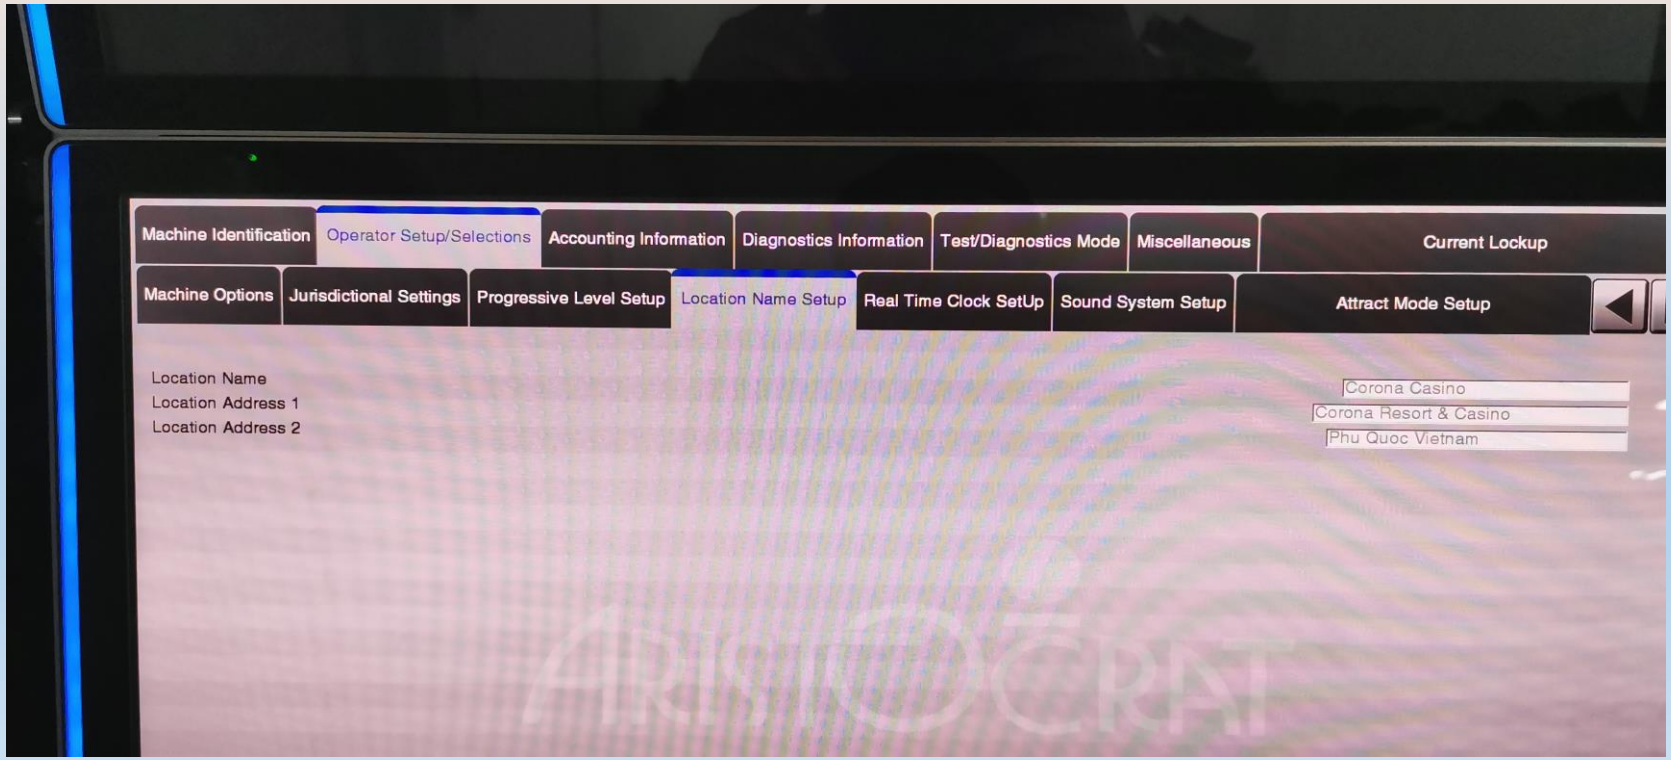



Progressive level Setup

- This is to set the progressive level

Location Name Setup

- Auto set by the system or host

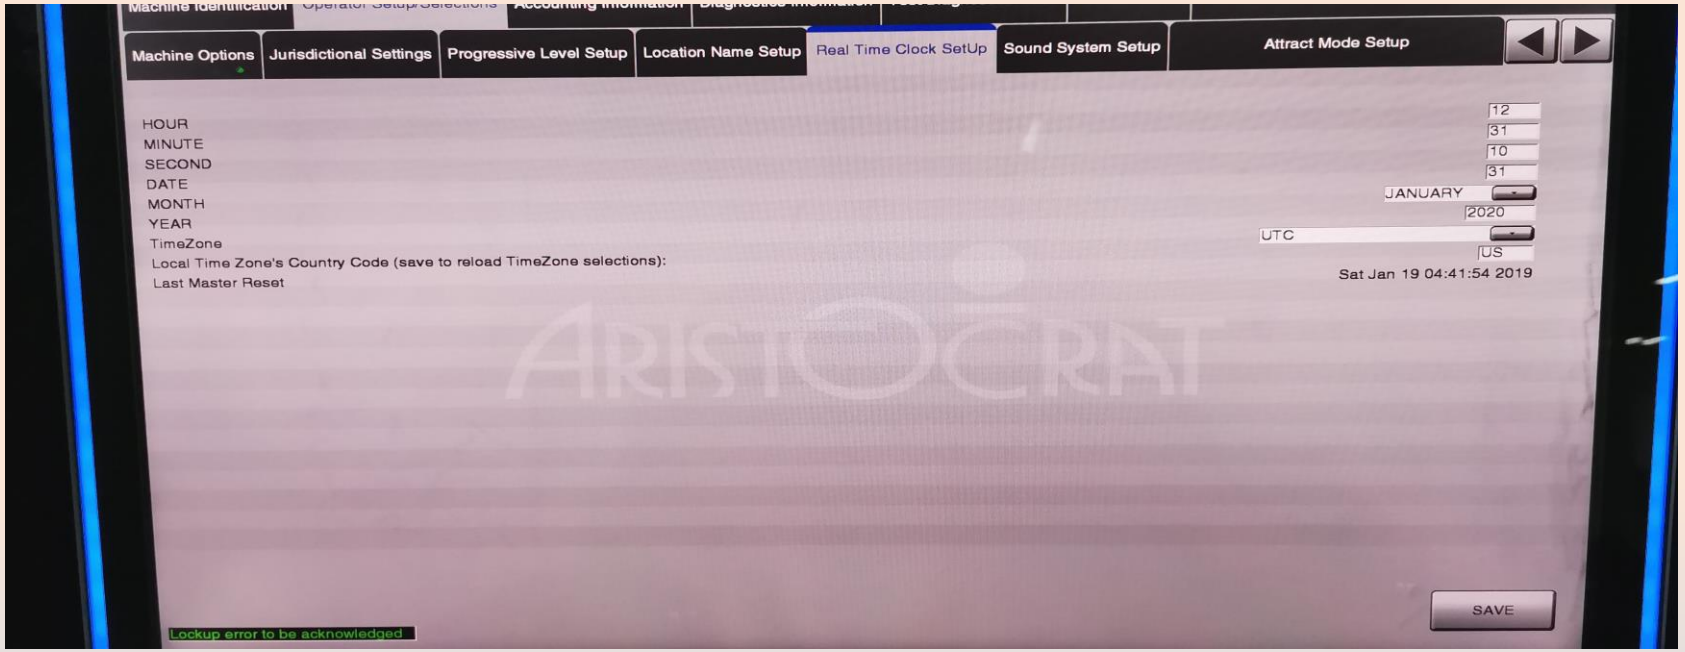

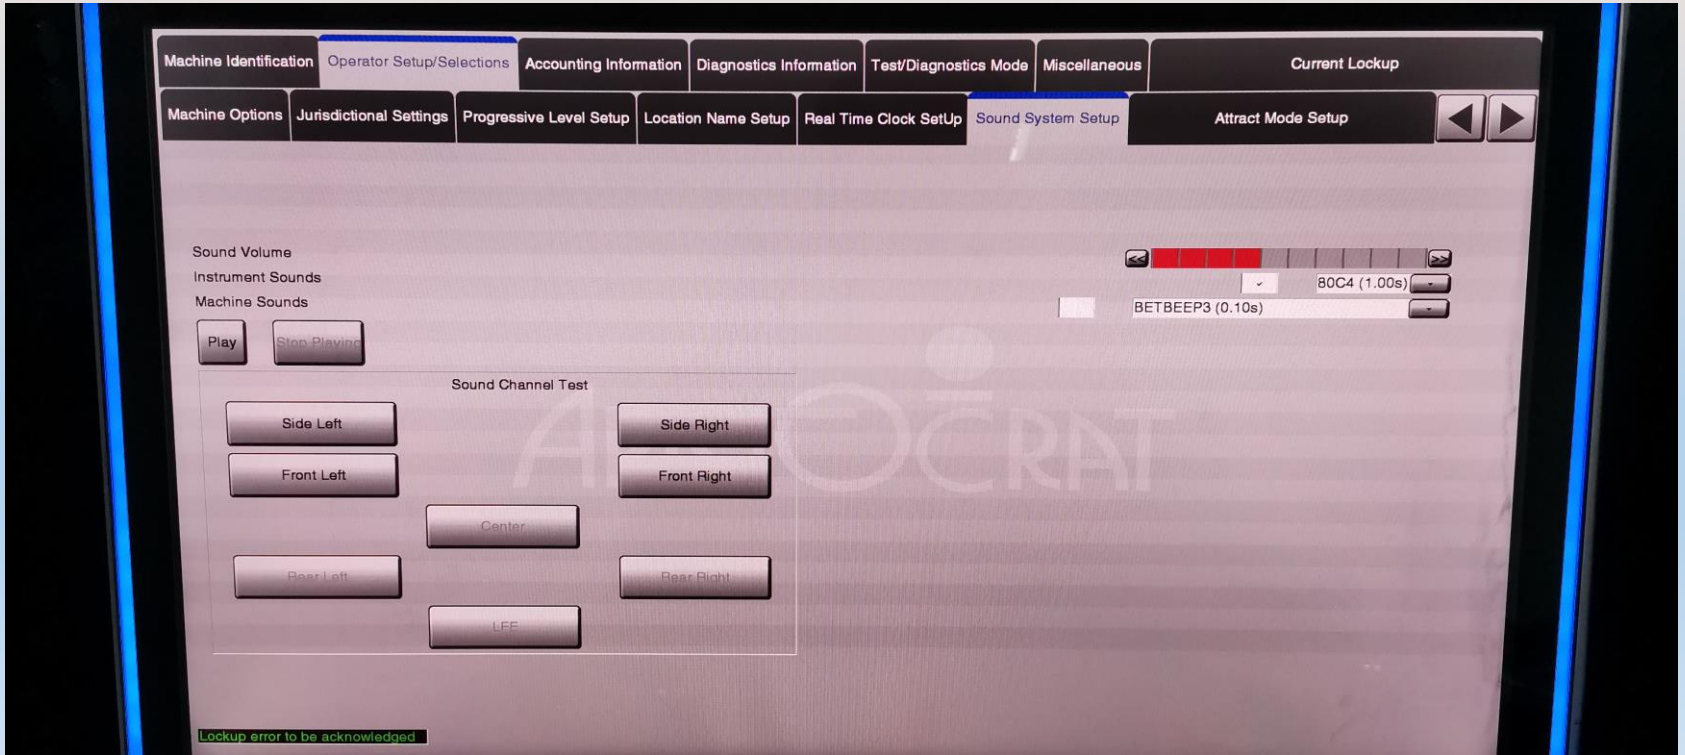



Real Time Clock Setup

- Set up time and date
- Tap Save

Sound System Setup

- Set up sound volume

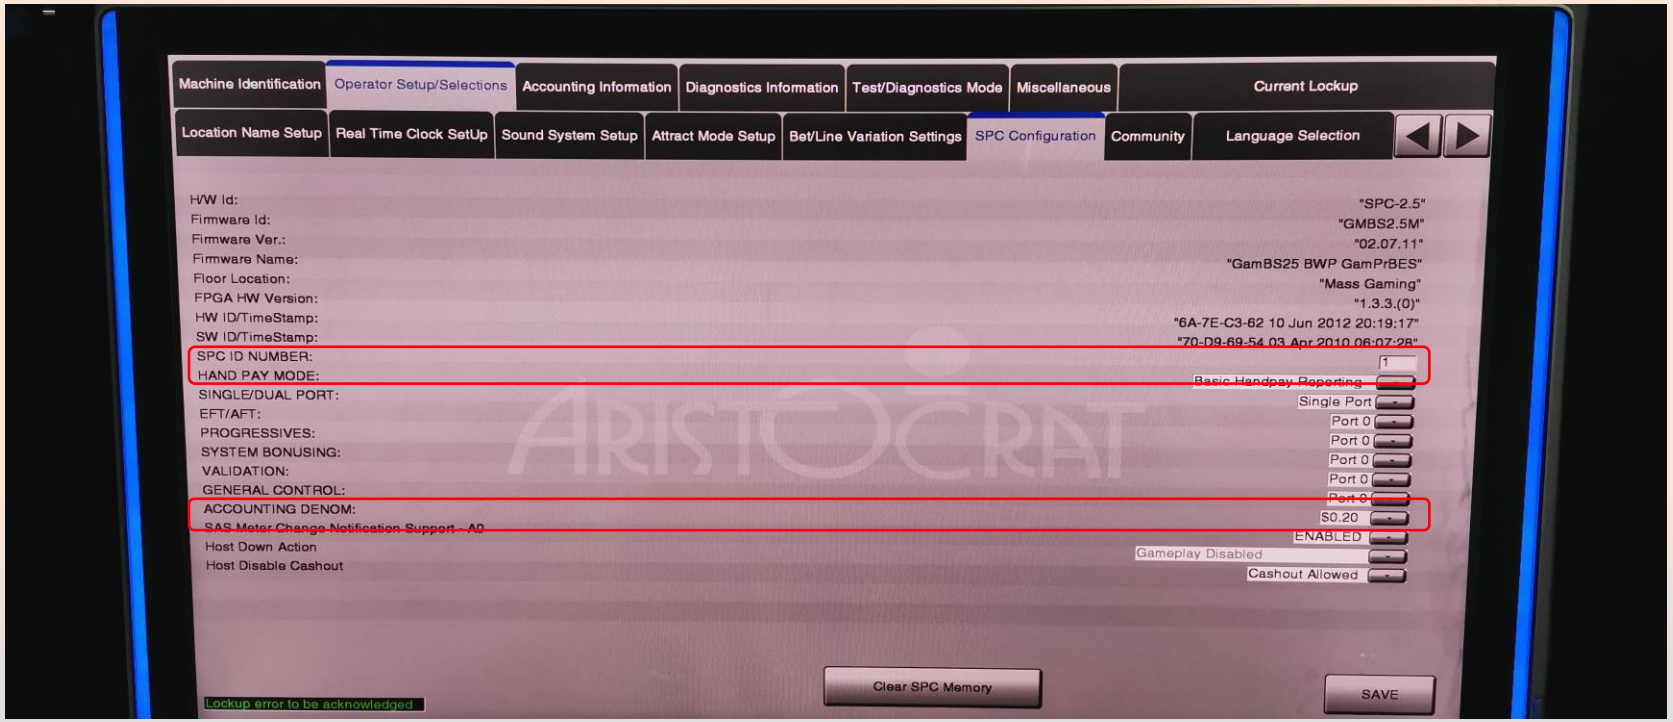

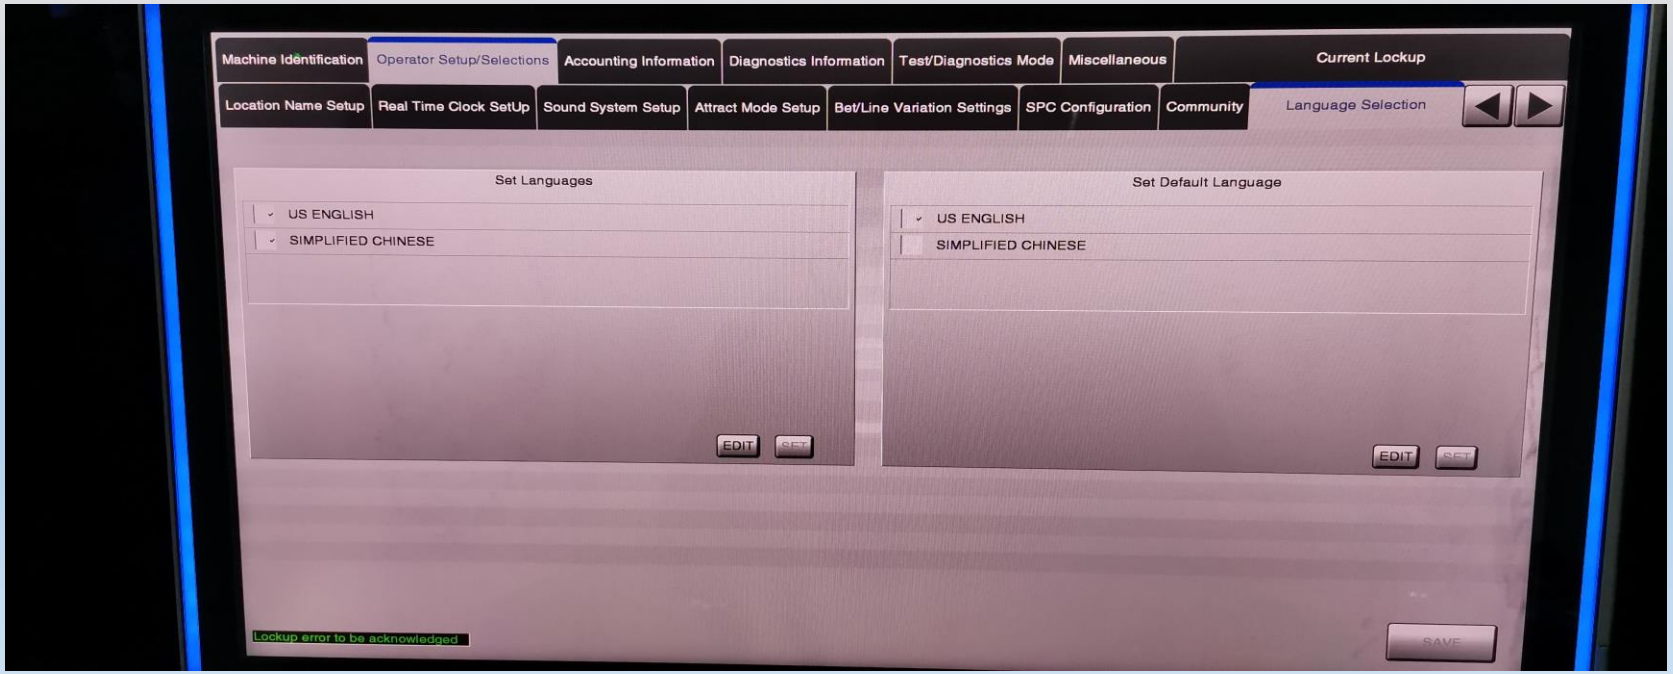

SPC Configuration

- SPC ID number = 1
- Accounting denom = denom set by management
- Tap Save to save options set
- Tap Clear SPC memory to clear SPC2.5

Language Selection


On the Languages box


- Tap Edit
- Tap Simplified Chinese
- Tap Set

On the Default Languages box

- Tap Edit
- Tap US english
- Tap Set


Tap Save

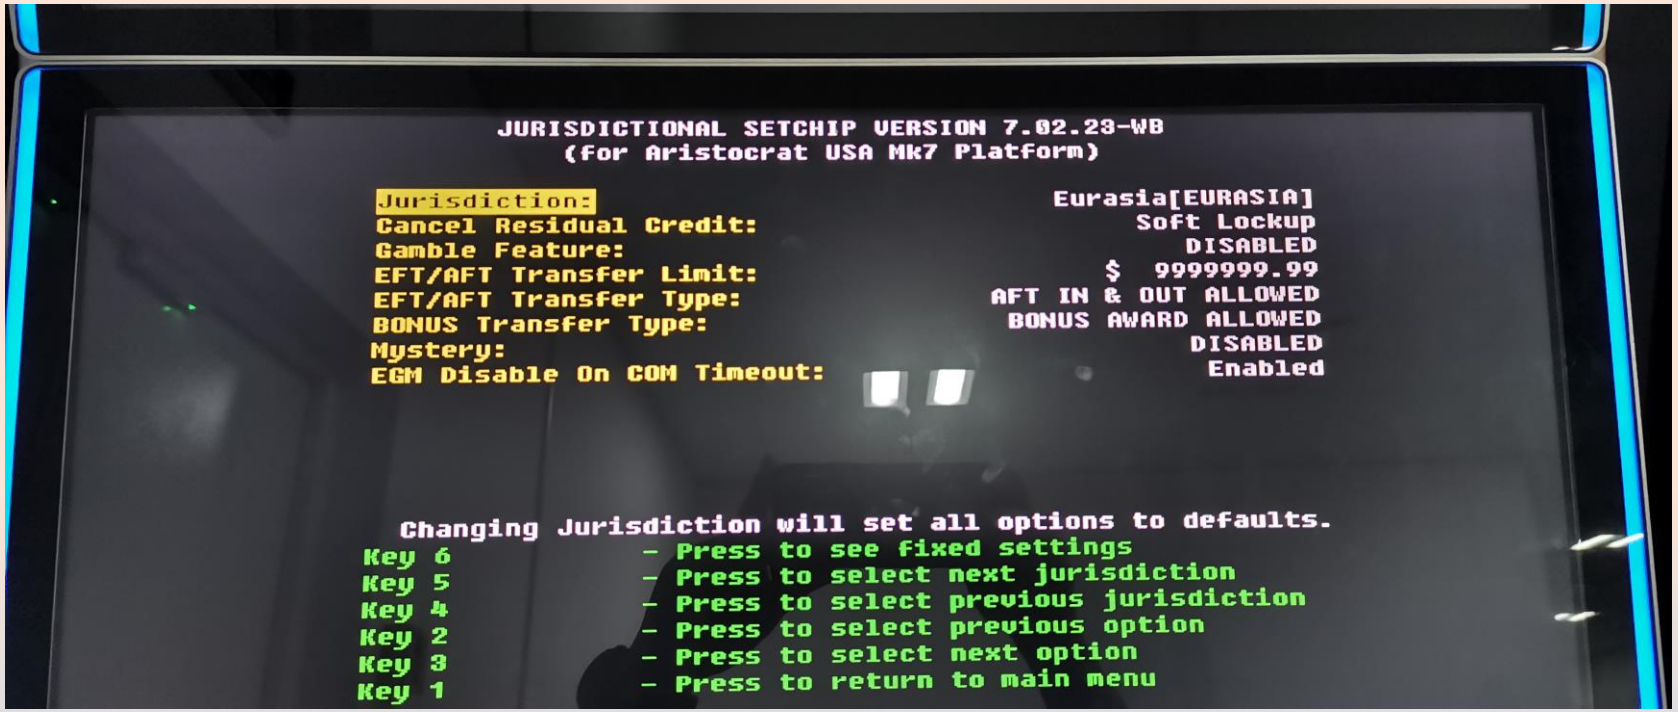


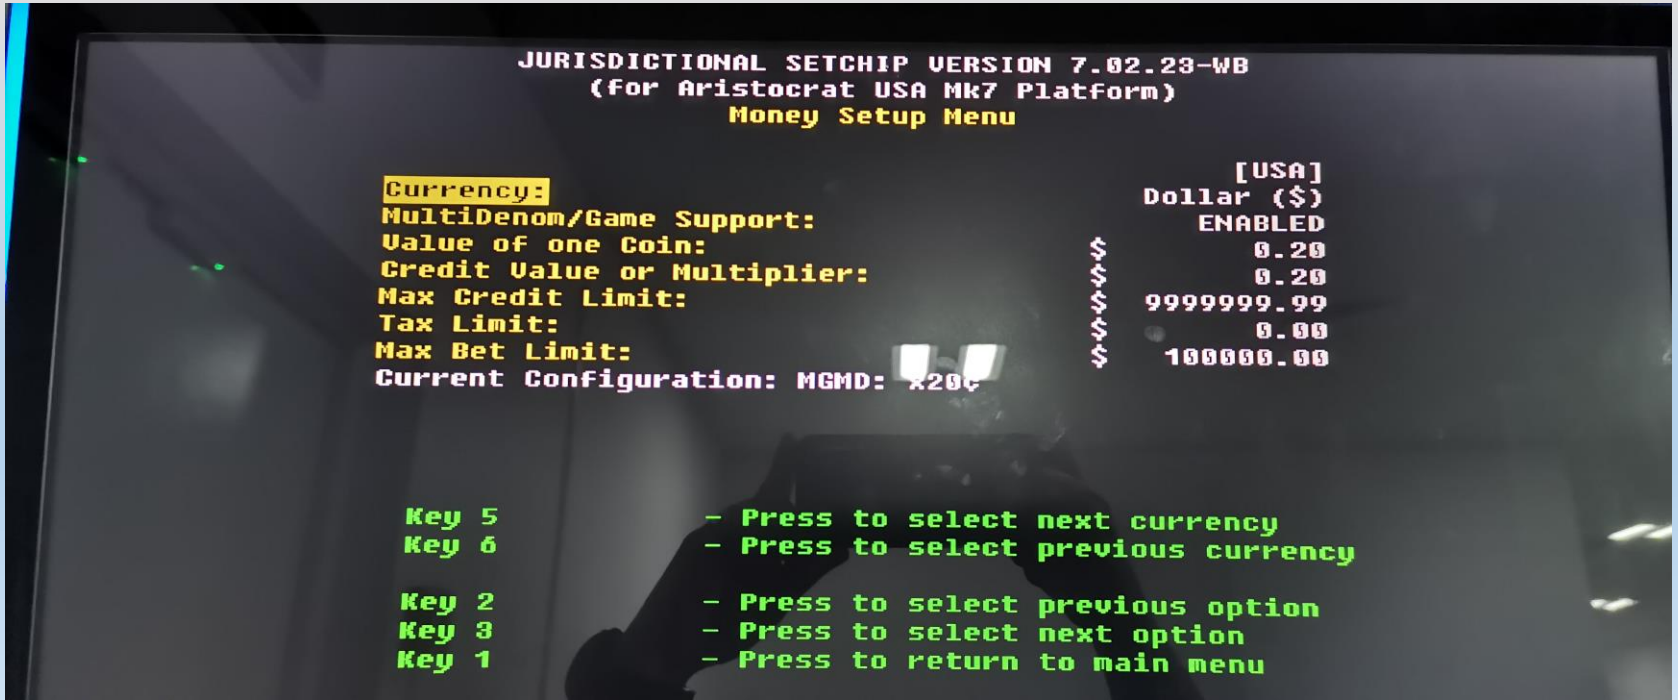

Jurisdiction Options


Money Setup Menu

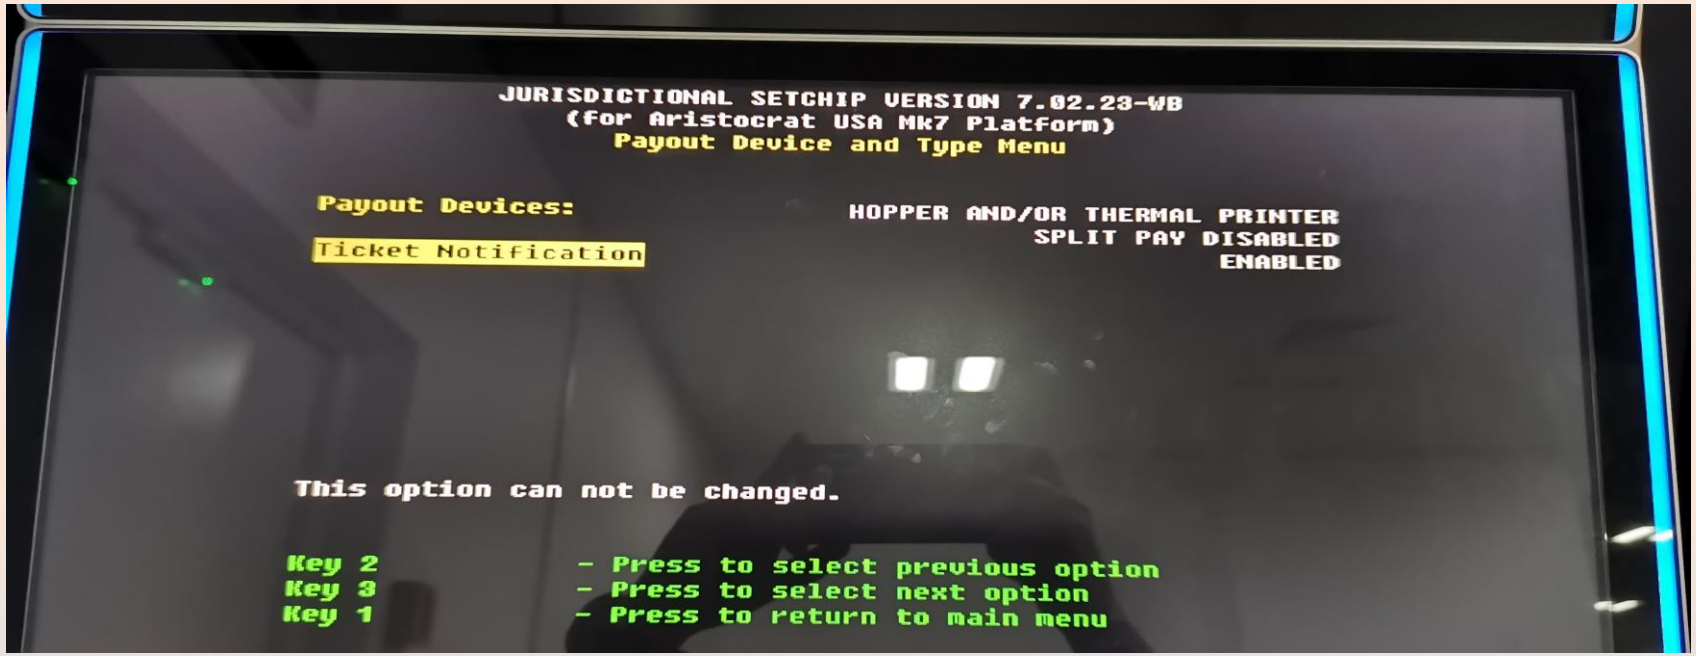


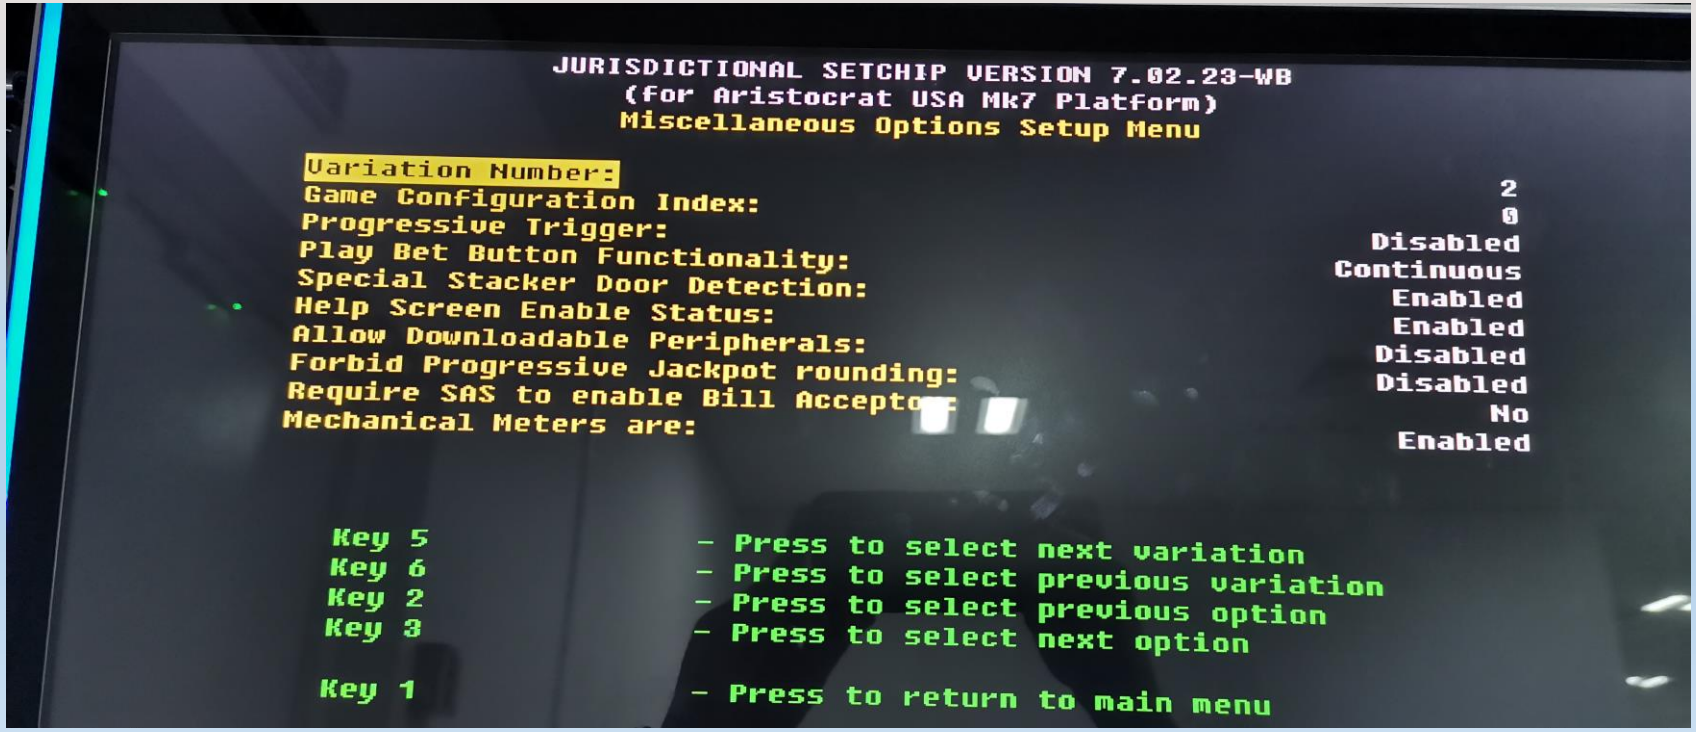

Payout Device and Type Menu

Miscellaneous Options Setup Menu

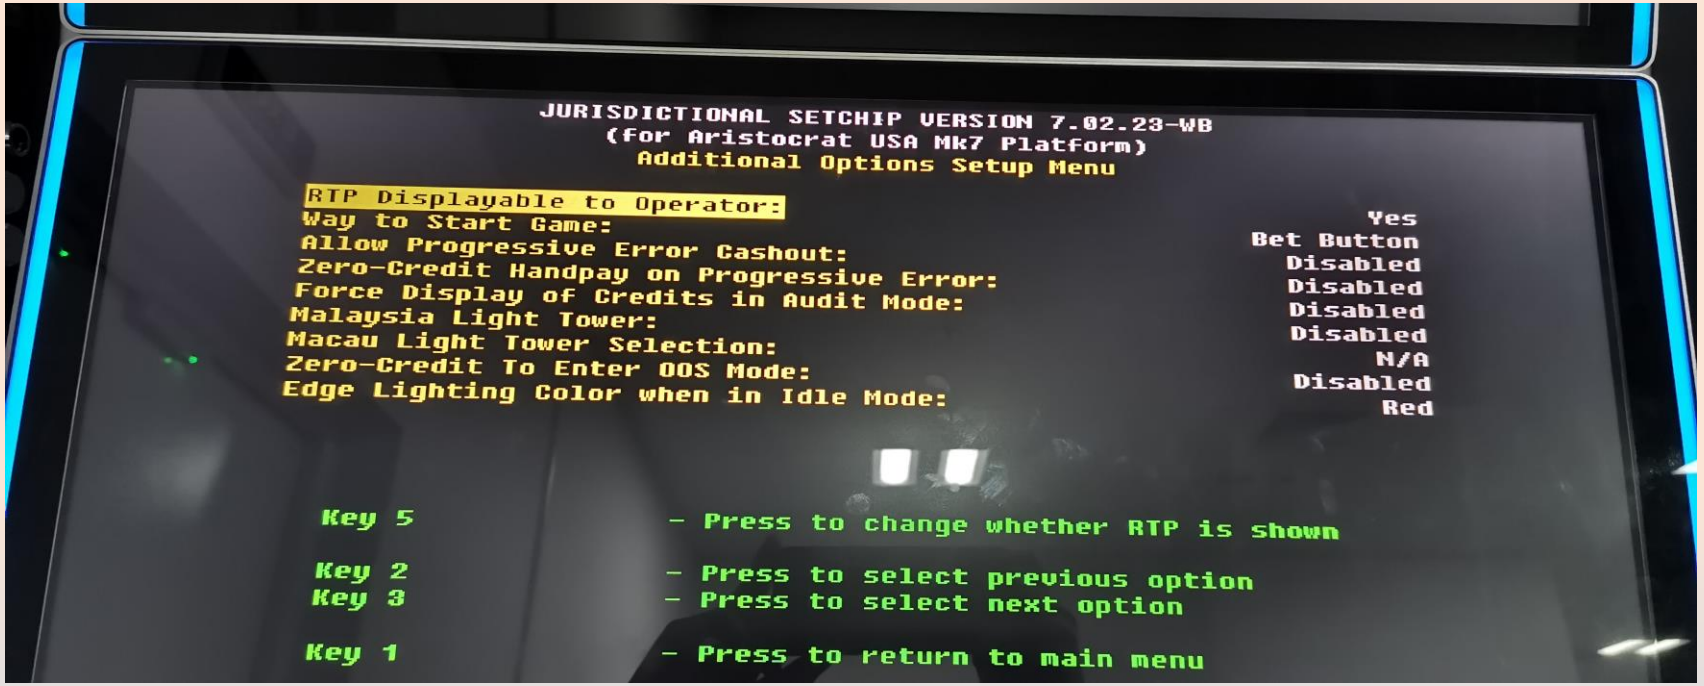


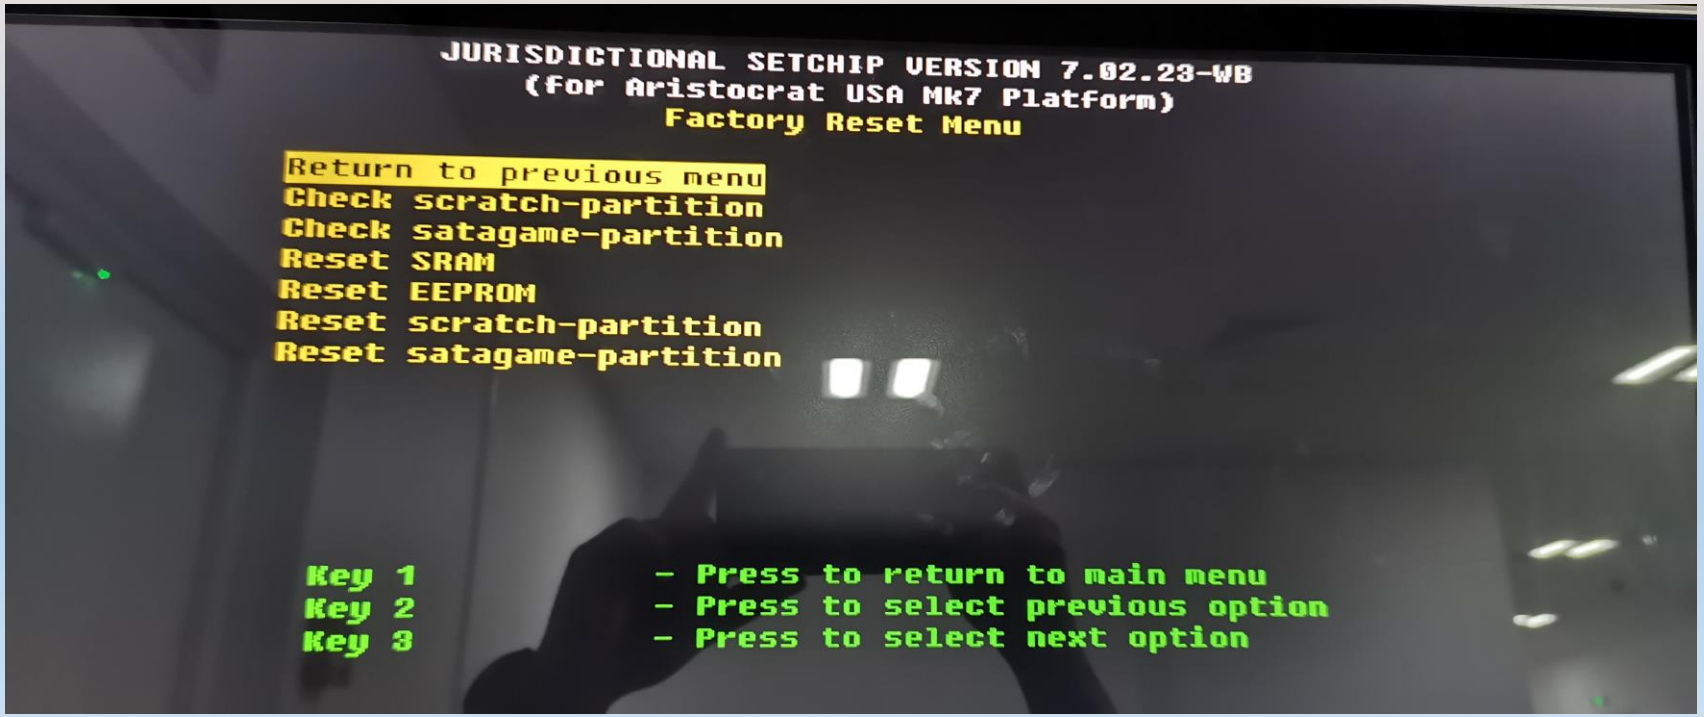

Additional Options Setup Menu

Factory Reset Menu

WARNING do not touch this unless given permission.

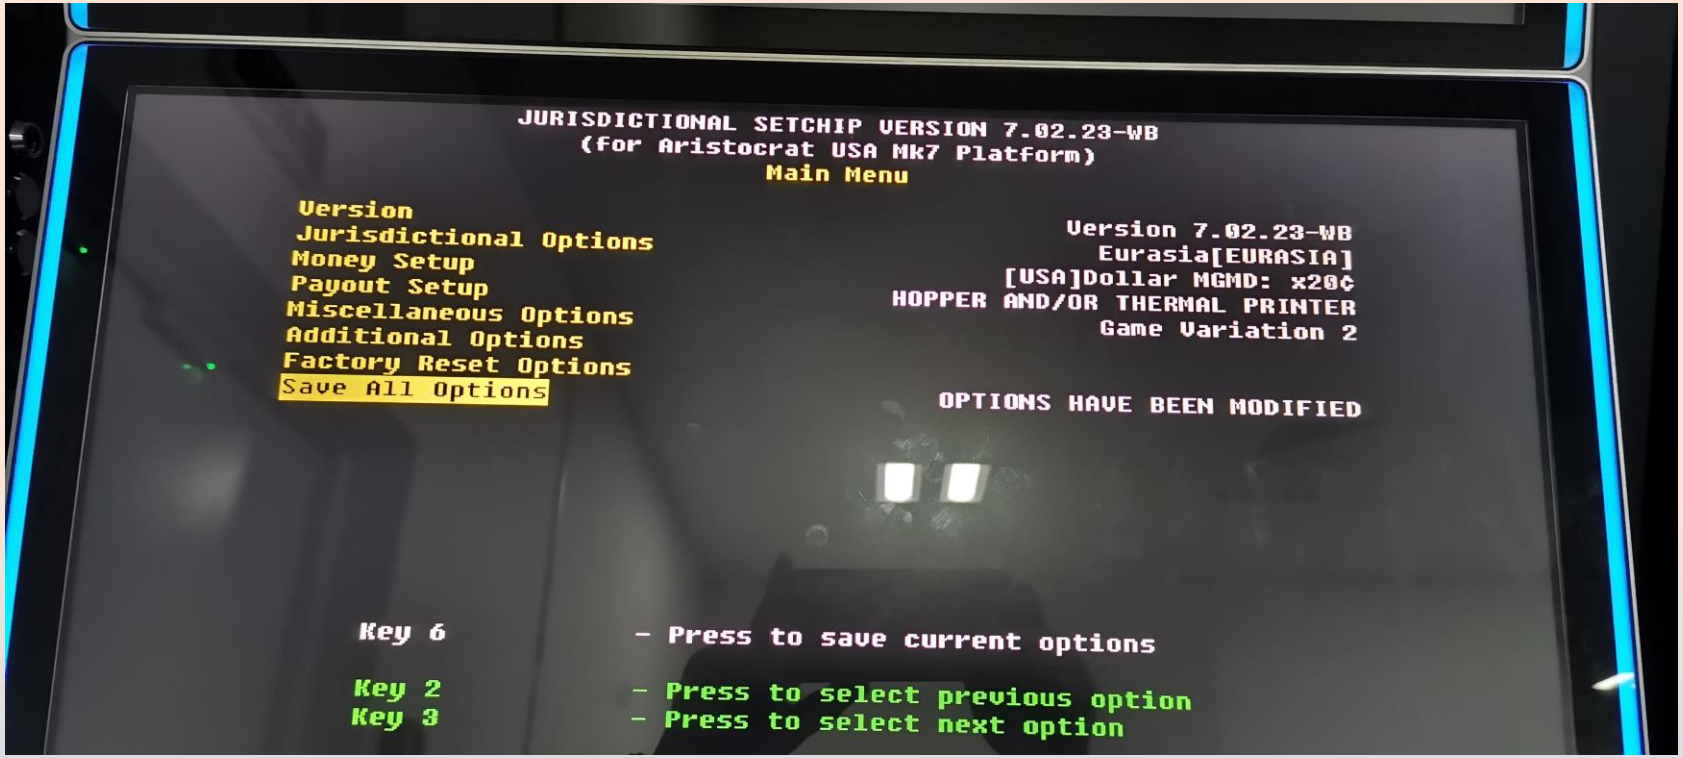

Main Menu

Select SAVE ALL OPTIONS, if, there are changes made on the settings.