

Maker Buoy Camera Serial/USB Cable Interface Instructions (Windows Only)

Step 1: Download camera interface Windows software using one of the links below.

[SC30MPA Camera Page](#)

[SC03MPD & SC20MPB & SC30MPA Test Tool V3.0.exe](#)


The download is the executable. There is no Windows installer. Place the software in a convenient location. You can put a shortcut to the executable on the desktop.

Step 2: Plug Serial/USB cable into your computer's USB port. Navigate to the Device Manager and look for the Ports (COM and LPT) section. Look for an entry titled USB Serial Port (COMXX). If the value XX is 15 or less, remember that value and go onto step 3. If that value is over 15, then right-click on the entry and go to Port Settings->Advanced and change the COM port value to an available value 15 or less.

Step 3: Run the camera software by double-clicking on the icon in the folder where you saved it.

Go to the Next Page


Step 4: Connecting the Camera to the Software

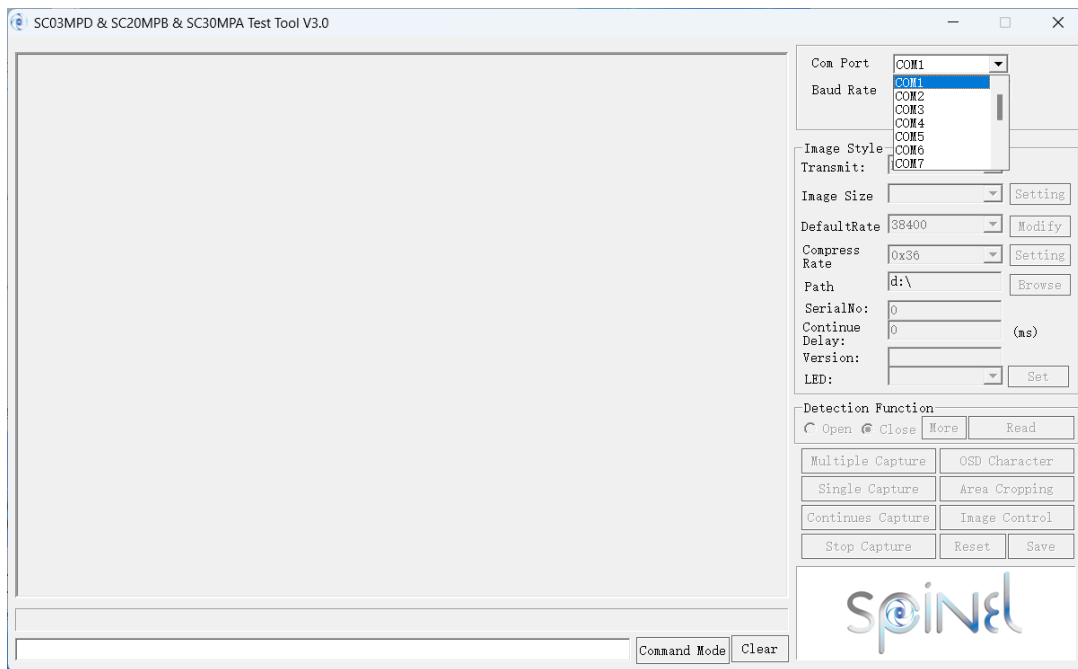

Select the appropriate COM Port.


Set the Baud Rate to 460800

Click Open.

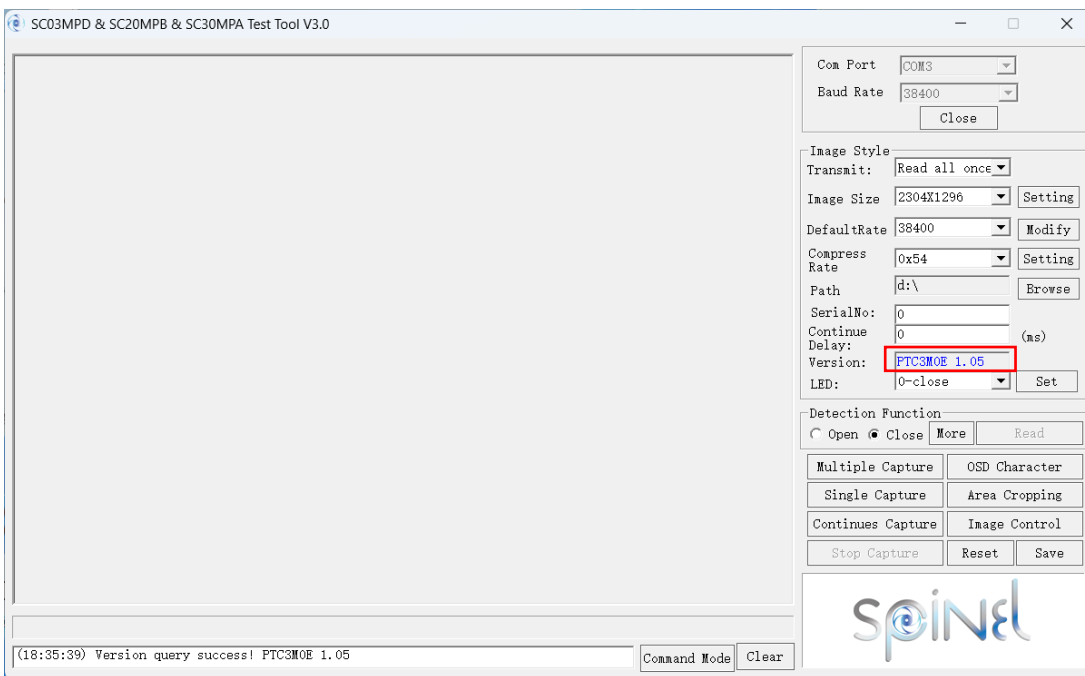


The camera is successfully connected if you see the Version # as shown.

Step 5: Setting the Image Storage Path and Resolution

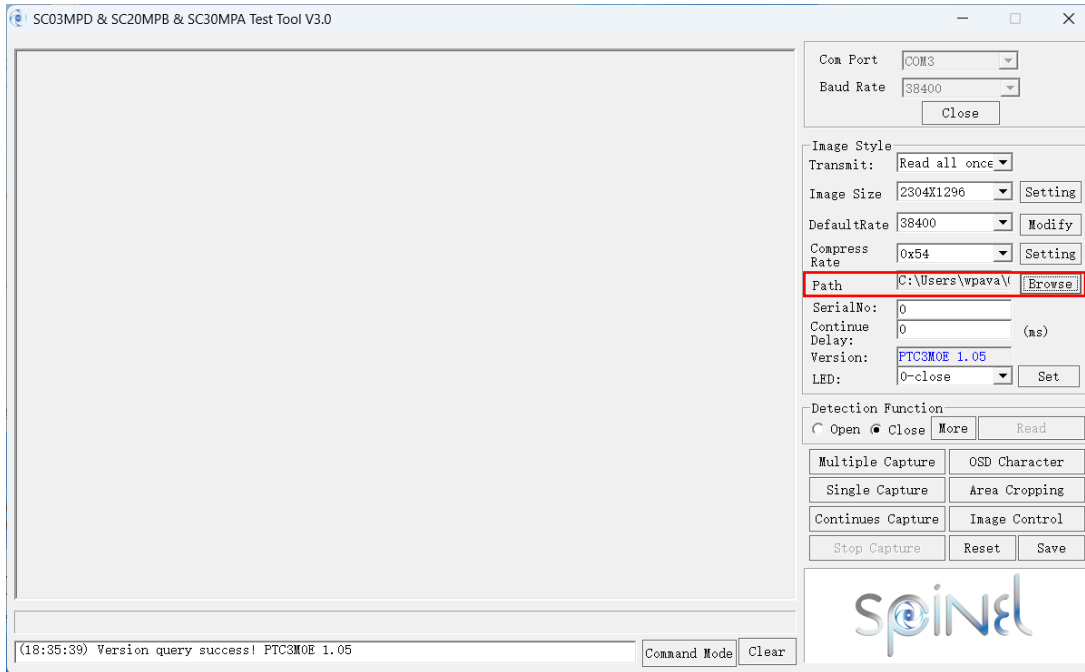

Change the “Path” to a convenient folder. This is where images will be stored.


This step is required before acquiring an image.

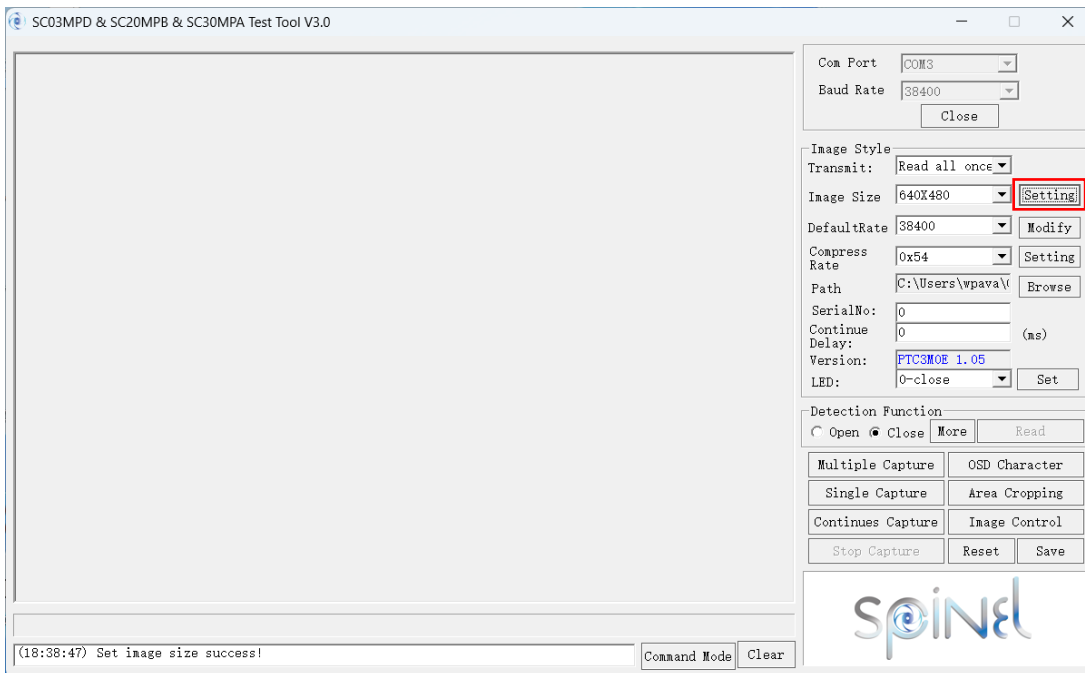

Change the “Image Size” to 640x480 or smaller to test image collection.


Click the “Setting” button to change the setting on the camera.

Step 6: Taking an Image

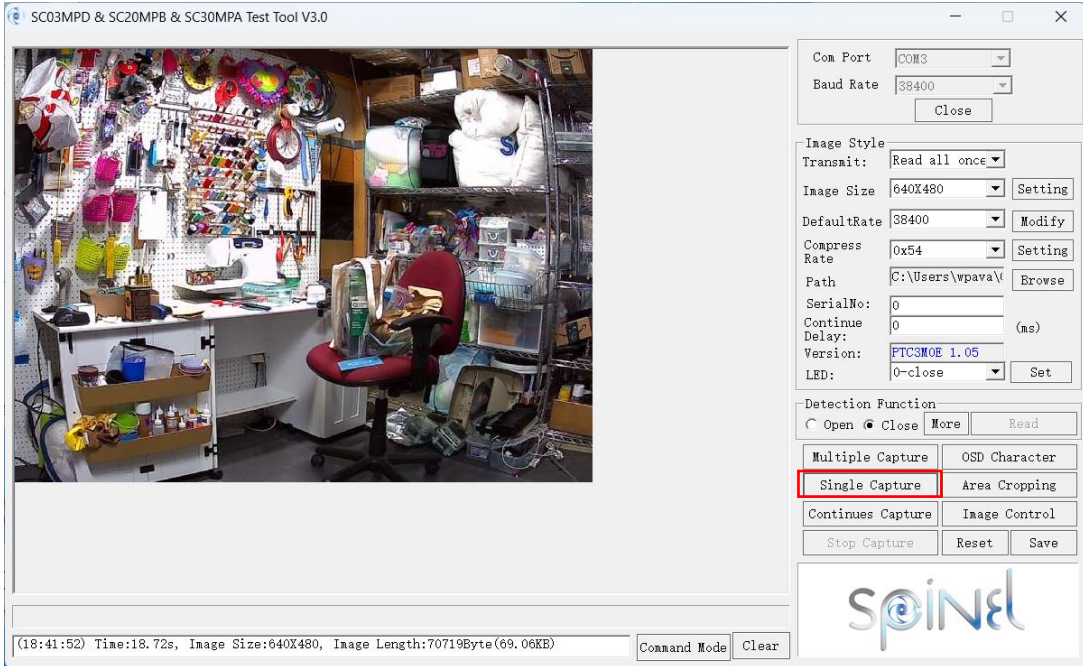

Click the
“Single
Capture”
button and wait
while the image
is downloaded.

Click “Save” to
copy the image
to your storage
folder

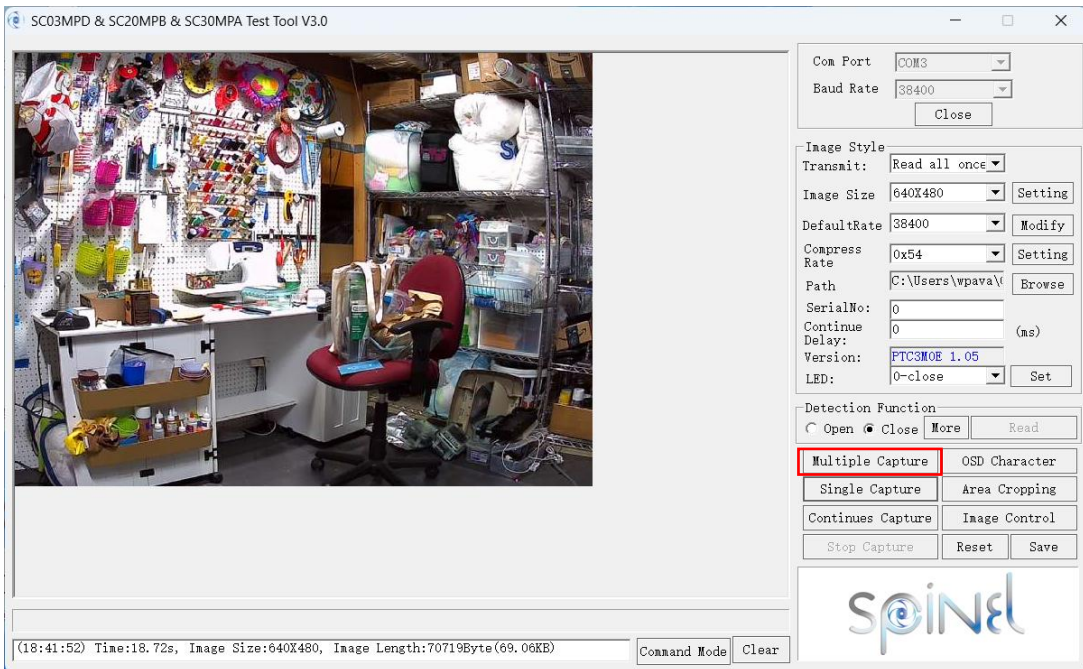

Click the
“Multiple
Capture” to
test the Burst
Mode

You will be able
to set # Pics
and Interval
and Download
each image