

This drawing is property of Schneider Electric Power Drives GmbH



Schneider Electric Power Drives GmbH
Ruthnergasse 1
A-1210 Vienna
Tel: +43 (0)1 29191 0
www.se.com

Customer SE d.o.o. (Croatia)
Name of Plant Nabla Plus-Sintaksa
Drawing number 8AP5126.00/00

Producer Schneider Electric Power Drives GmbH
Assignment 243739077/0001
Project Number A2-243739077
Responsible Stojkov
Type ATV680C13Q4X1

Made on 11.08.2026
Drawn on 17.08.2026
Created by Gill

Date	17.08.2026
Design	Gill
Checked	Stojkov



ATV680C13Q4X1
SE d.o.o. (Croatia)
Nabla Plus-Sintaksa

This drawing is property of Schneider Electric Power Drives GmbH

0	1	2	3	4	5	6	7	8	9
Table of Contents									
Page	Designation								
1	Cover sheet								
2	Table of contents								
3	Table of contents								
4	Revision overview								
5	Specification Notes								
6	Technical data								
7	Technical data								
8	Technical data								
9	Power supply								
10	Frequency inverter								
11	Enclosure lighthing, Anti condensation heater								
12	Control Unit								
13	Control Unit								
14	Control Unit								
15	Control transformer 230V, power supply unit 24V								
16	Line contactor activation								
17	Cubicle fan								
18	Cabinet I/O								
19	Frequenzy inverter								
20	Power board								
21	Terminal Diagram: -X100 -X100 - 1/1								
22	Terminal Diagram: -X110 -X110 - 1/1								
23	Terminal Diagram: -X120 -X120 - 1/1								
24	Terminal Diagram: -X130 -X130 - 1/1								
25	Terminal Diagram: -X140 -X140 - 1/1								
26	Terminal Diagram: -X170 -X170 - 1/2								
27	Terminal Diagram: -X170 -X170 - 2/2								
28	Terminal Diagram: -X195 -X195 - 1/1								
29	Terminal Diagram: -X200 -X200 - 1/1								
30	Terminal Diagram: -X205 -X205 - 1/1								

Table of contents	Date	17.08.2026		ATV680C13Q4X1 SE d.o.o. (Croatia) Nabla Plus-Sintaksa	=	+	8AP5126.00/00	Page 2
	Design	Gill						
	Checked	Stojkov						

Table of Contents

[illegible]

Revision overview

Index	Revision description	Creator	Date

This drawing is property of Schneider Electric Power Drives GmbH

This drawing is property of Schneider Electric Power Drives GmbH

Wiring Colors	
yellow, black	Main Wire
light blue	Neutral Conductor
red	Control Circuits AC
blue	Control Circuits DC
green / yellow	Earth, Protective Bonding
white	Analogue Signals 4-20mA etc.
orange	External Voltage
brown	Measuring Line

Translation Table
bk: black
gn: green
ye: yellow
rd: red
bu: blue
wh:white
gy: grey
og: orange
bg: beige
pk: pink
bn: brown
vt: violet
tr: transparent

0	1	2	3	4	5	6	7	8	9																														
Electrical data <table><tr><td>Nominal voltage</td><td>400 VAC (+/- 10%)</td></tr><tr><td>Rated insulation voltage</td><td>480V</td></tr><tr><td>Mains frequenzy</td><td>50/60Hz (+/- 5%)</td></tr><tr><td>Mains rated current</td><td>208A</td></tr><tr><td>Type of mains</td><td>TN-Mains</td></tr><tr><td>Verifying the impulse withstand voltage</td><td>6kV</td></tr><tr><td>Overvoltage category</td><td>Category III</td></tr><tr><td>Rated conditional short-circuit conditionnel (ICC)</td><td>max. 20kA (100ms)</td></tr><tr><td>Auxiliary Power Supply</td><td>---</td></tr></table> <table><tr><td></td><td>Normal duty (ND)</td><td>Heavy duty (HD)</td></tr><tr><td>Typical engine power</td><td>132kW</td><td>110kW</td></tr><tr><td>Rated output current</td><td>250A</td><td>210A</td></tr><tr><td>Maximum output current for 60s per 10 minutes</td><td>275A</td><td>317A</td></tr></table>										Nominal voltage	400 VAC (+/- 10%)	Rated insulation voltage	480V	Mains frequenzy	50/60Hz (+/- 5%)	Mains rated current	208A	Type of mains	TN-Mains	Verifying the impulse withstand voltage	6kV	Overvoltage category	Category III	Rated conditional short-circuit conditionnel (ICC)	max. 20kA (100ms)	Auxiliary Power Supply	---		Normal duty (ND)	Heavy duty (HD)	Typical engine power	132kW	110kW	Rated output current	250A	210A	Maximum output current for 60s per 10 minutes	275A	317A
Nominal voltage	400 VAC (+/- 10%)																																						
Rated insulation voltage	480V																																						
Mains frequenzy	50/60Hz (+/- 5%)																																						
Mains rated current	208A																																						
Type of mains	TN-Mains																																						
Verifying the impulse withstand voltage	6kV																																						
Overvoltage category	Category III																																						
Rated conditional short-circuit conditionnel (ICC)	max. 20kA (100ms)																																						
Auxiliary Power Supply	---																																						
	Normal duty (ND)	Heavy duty (HD)																																					
Typical engine power	132kW	110kW																																					
Rated output current	250A	210A																																					
Maximum output current for 60s per 10 minutes	275A	317A																																					
Technical data			Date	17.08.2026		ATV680C13Q4X1 SE d.o.o. (Croatia) Nabla Plus-Sintaksa		=	+	Page 6																													
			Design	Gill																																			
			Checked	Stojkov																																			
								8AP5126.00/00																															

This drawing is property of Schneider Electric Power Drives GmbH

Mains- and motor connection

Mains cable	max. 2x 240 / 4x 185 mm² per phase ,bolt M12
Motor cable	max. 2x 240 / 4x 185 mm² per phase ,bolt M12

Environmental conditions

Ambient temperature for operation -10 ... +50°C	Below 0°C with additional cabinet heating, over +40°C with power reduction 3K3 according to IEC / EN 60721-3-3
Altitude	Max. 1000m
Environmental class	Class 3K3 according to IEC / EN 60721-3-3
Humidity	No condensation inside the control cabinet
Permissible pollution	2

This drawing is property of Schneider Electric Power Drives GmbH


Supplementary technical data

Cooling system	Forced air cooling
Total heat loss	5110W
Cooling air quantity	1300m³/h
Sound pressure	70dB(A)
Degree of protection	IP23
Internal separation of PSC-assemblies	Form 1
Cubicle color	RAL7035


Standards

Basic standard	IEC 61439-1 and IEC 61439-2
Insulation	Galvanic isolation control circuit
EMC category (acc. to IEC 61800-3)	Second environment, industrial enviroment C3

This drawing is property of Schneider Electric Power Drives GmbH

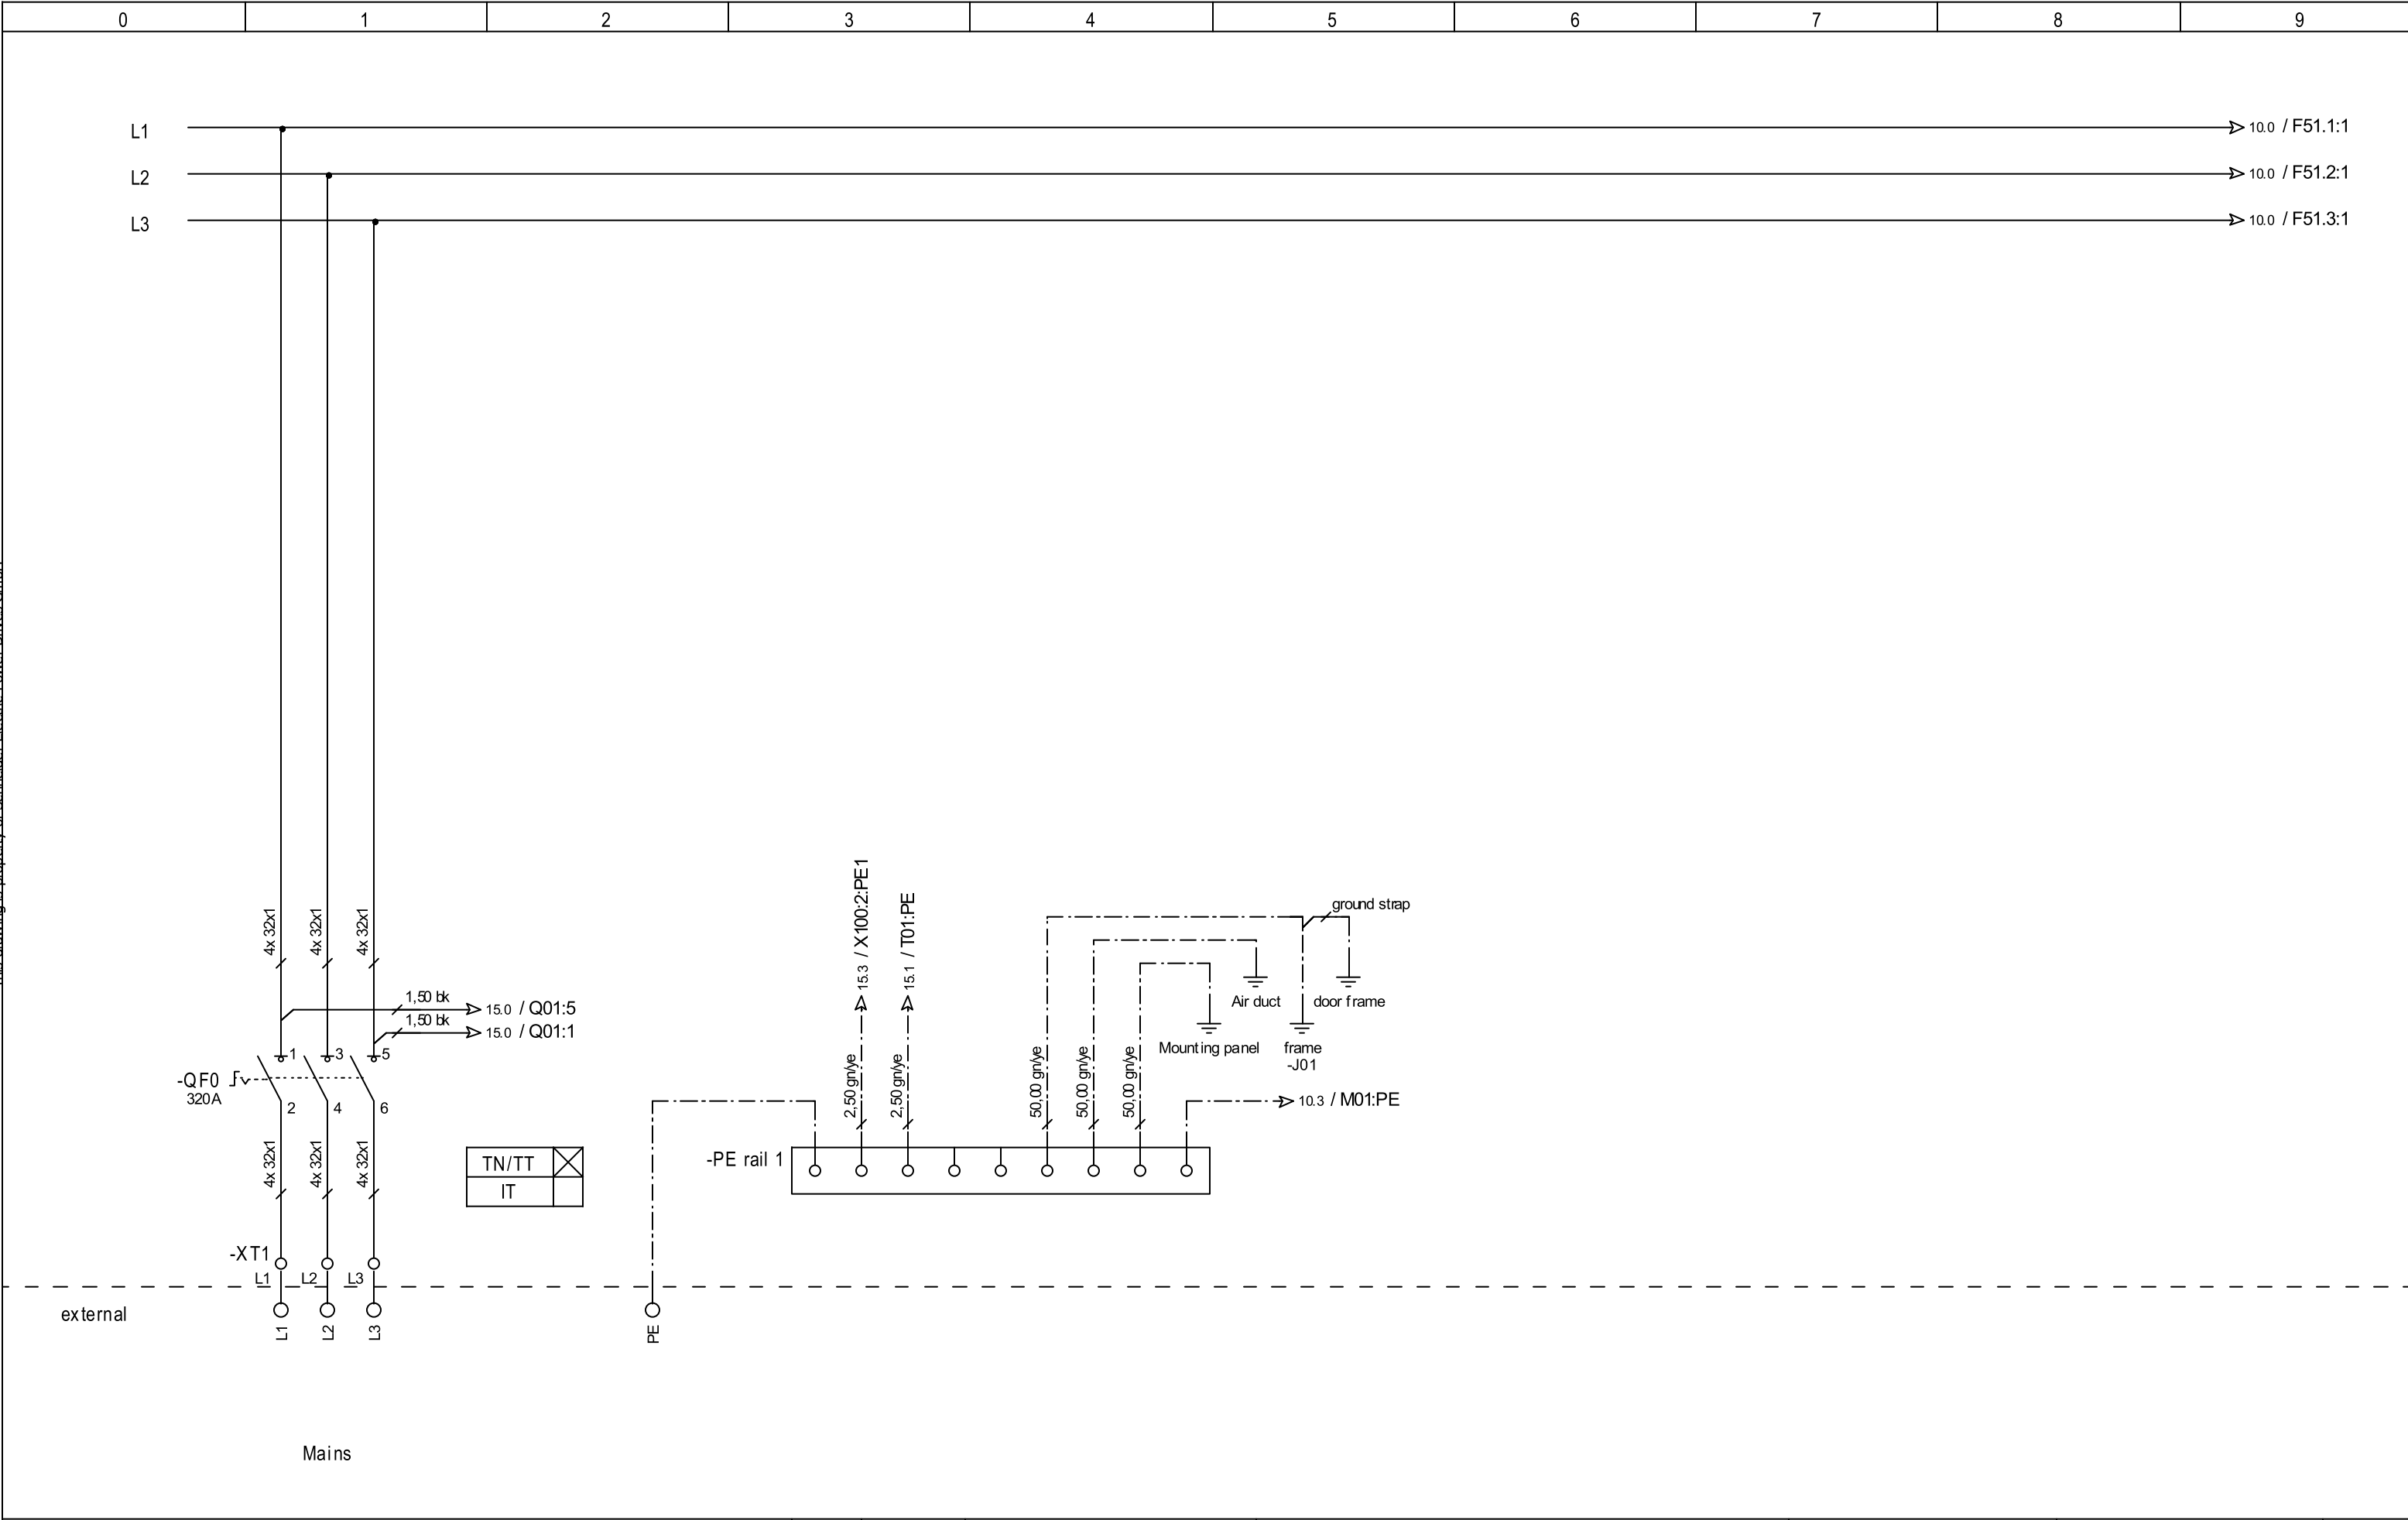


This drawing is property of Schneider Electric Power Drives GmbH

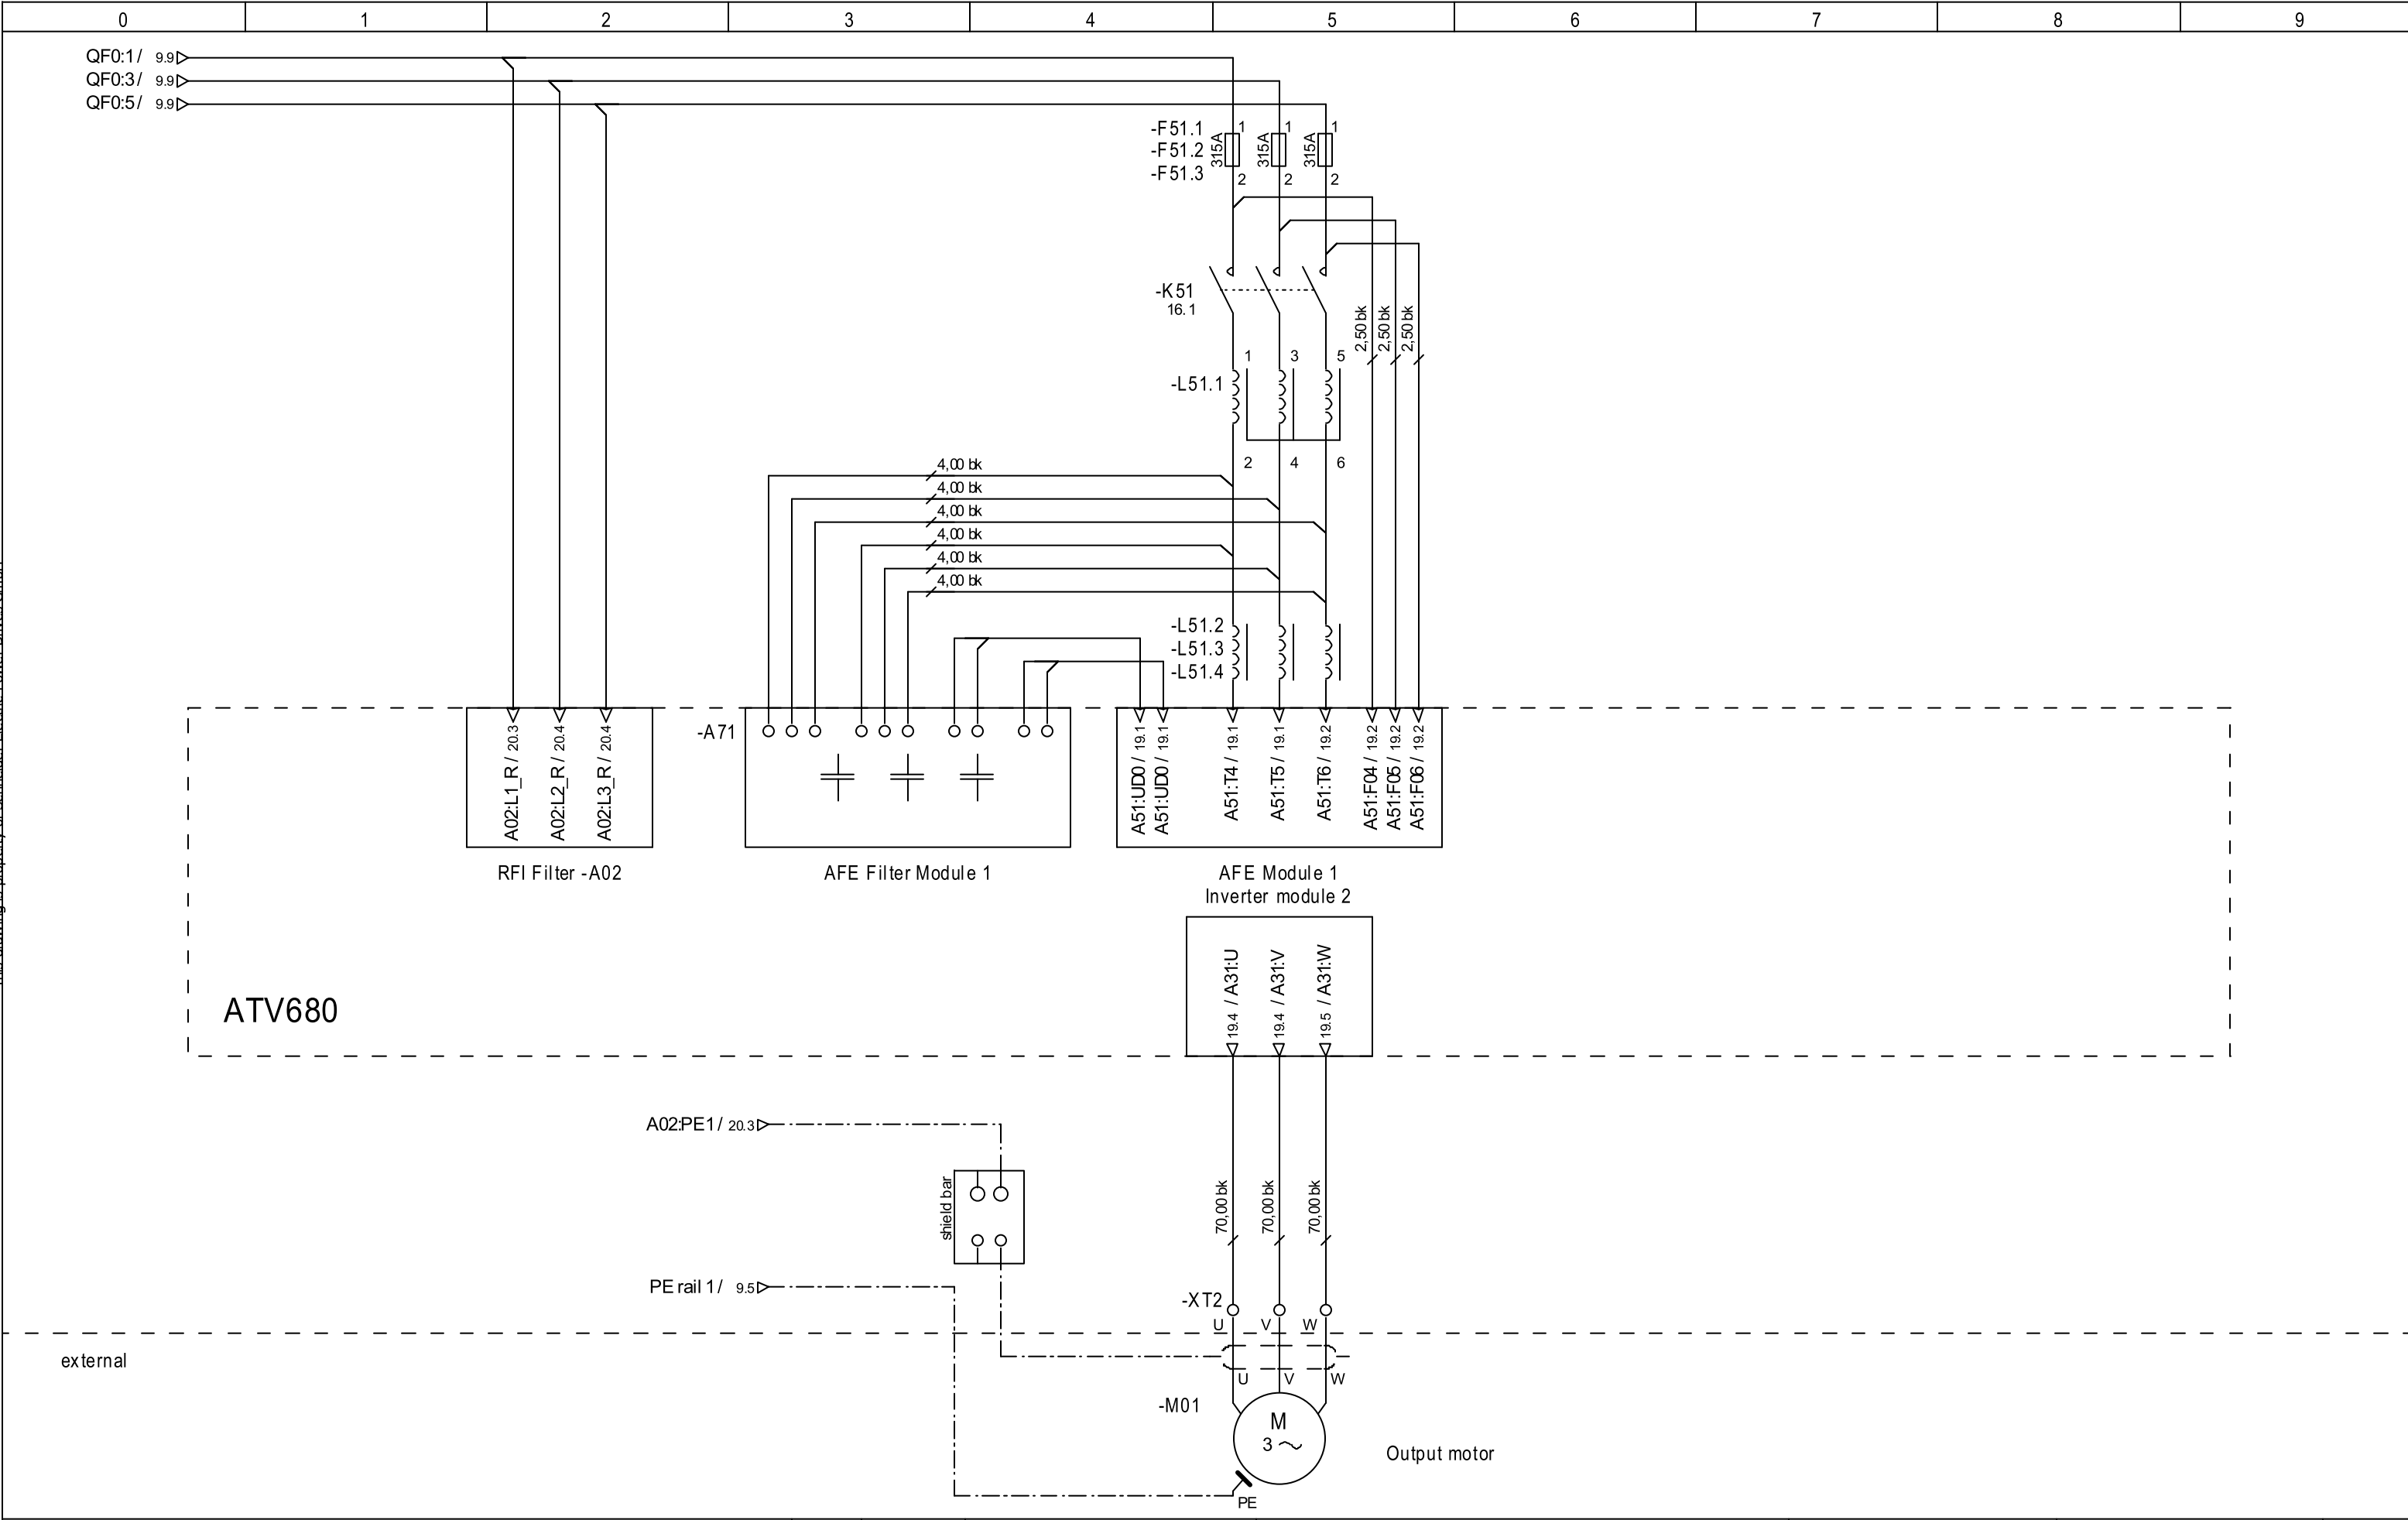

This drawing is property of Schneider Electric Power Drives GmbH


0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---

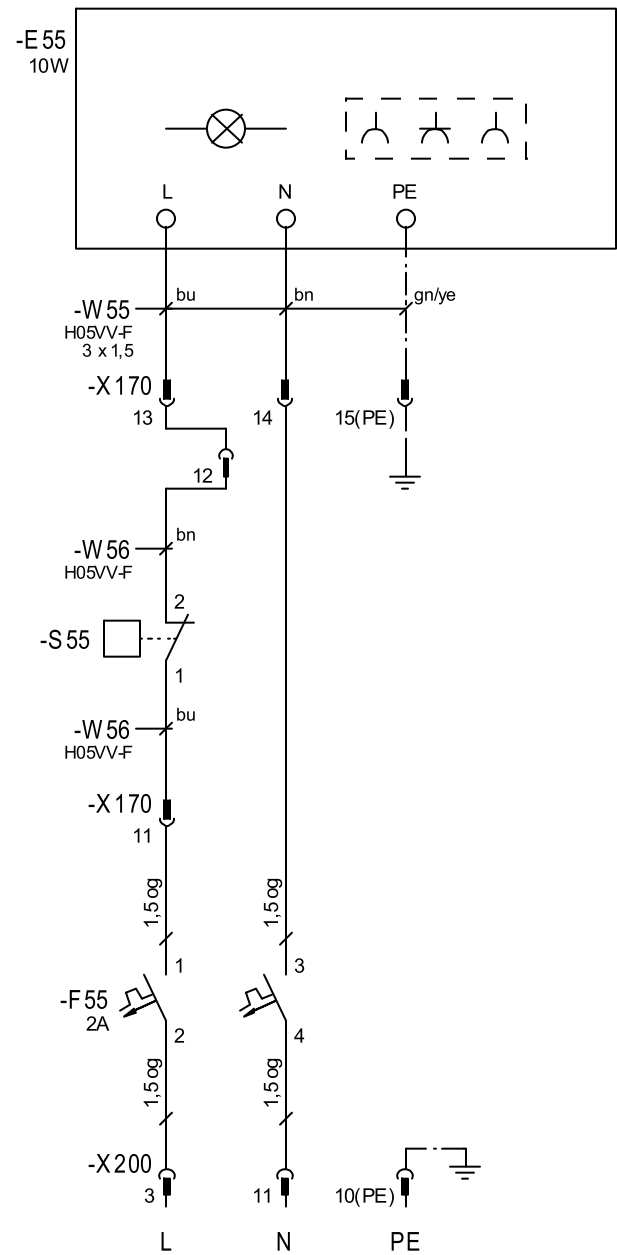

Cubicle illumination

230VAC Control voltage with ext. residual-current-protection - OVC II


Attention, not all circuits arer disconnected!



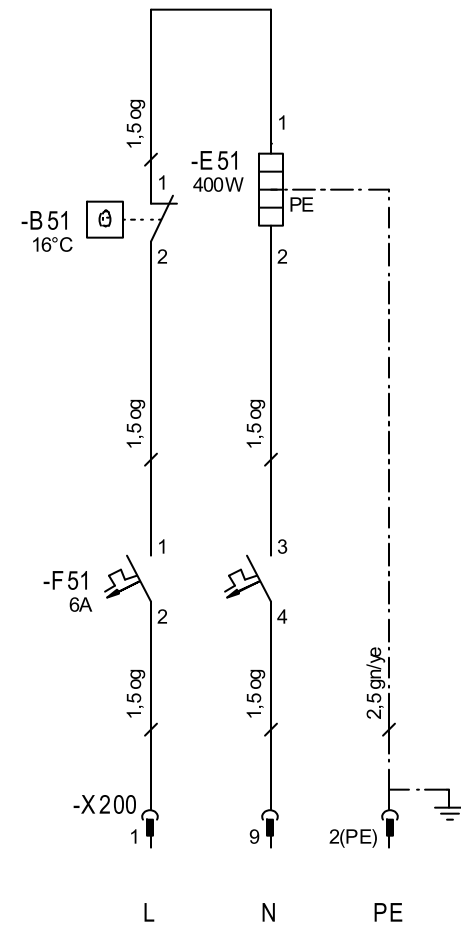



cubicle heating

Control voltage 230VAC from external - OVC II


Attention, not all circuits are disconnected!!

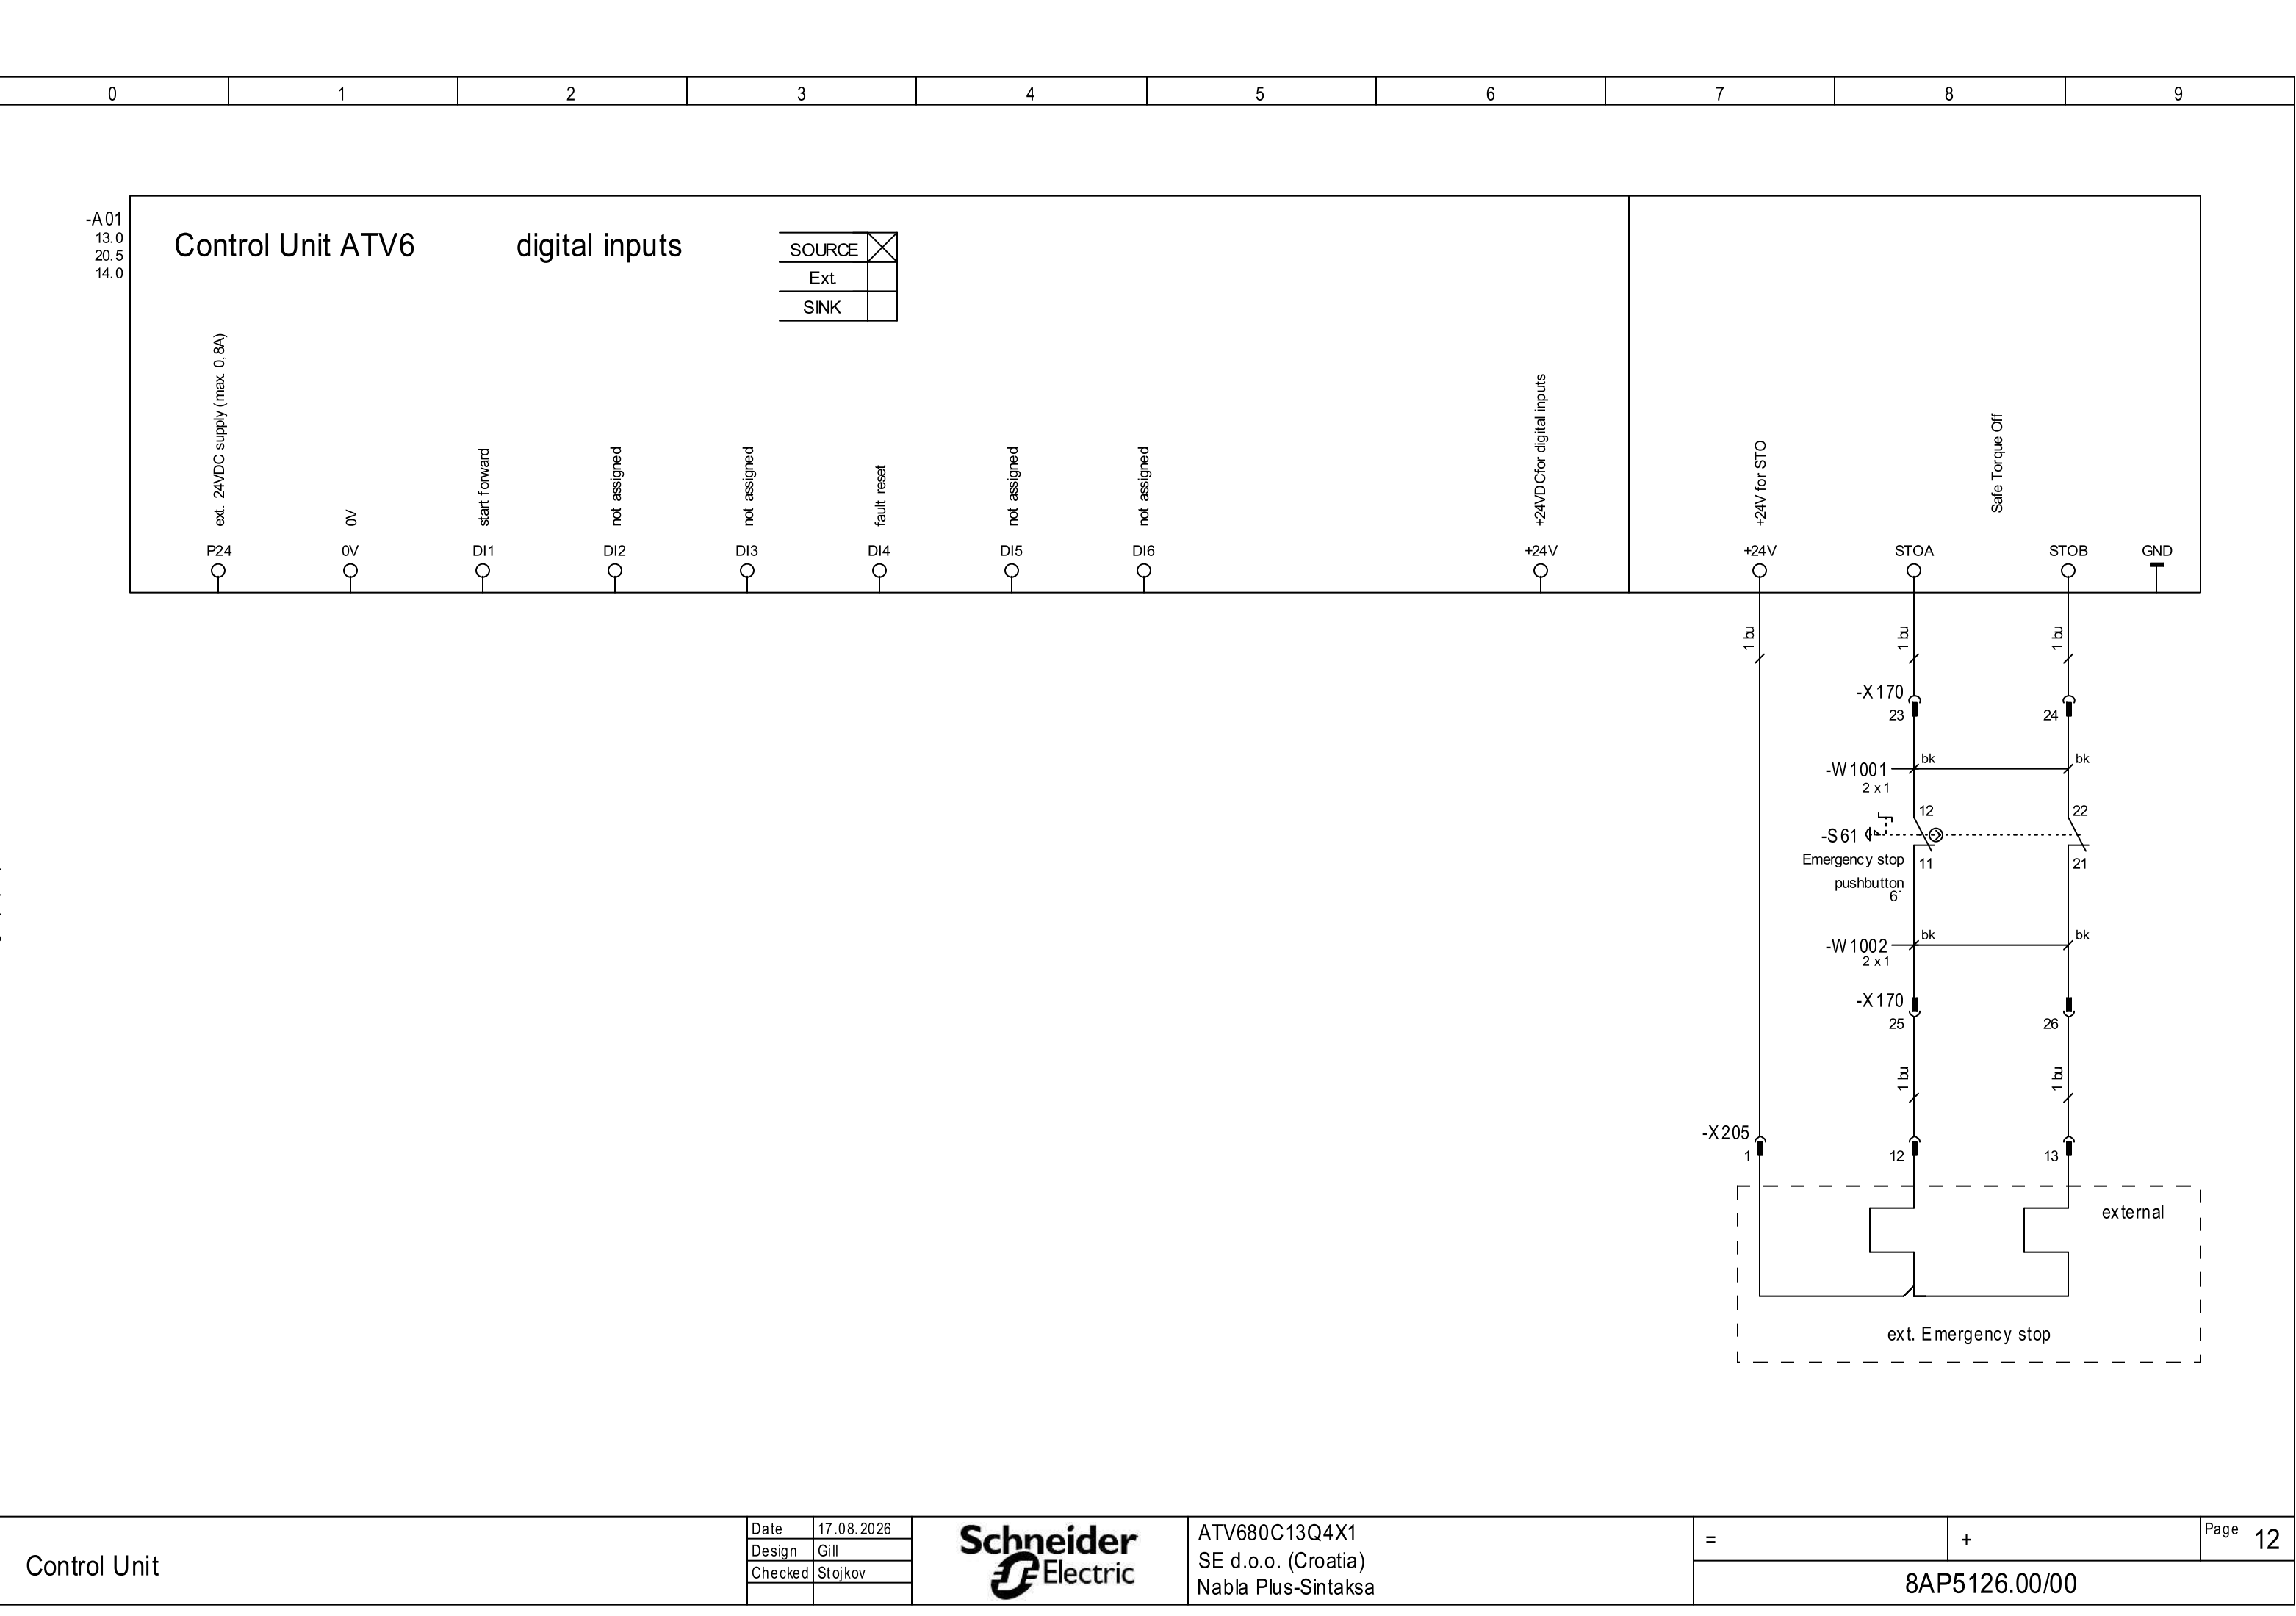

0		1		2		3		4		5		6		7		8		9																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
-A01 12.0		Control Unit ATV6						digital outputs						analog inputs						analog outputs																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
		R1A R1B R1C						R2A R2C						R3A R3C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
		+10V						ref. 1 channel						ground						not assigned						not assigned																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
						+10V Reference						AI1						COM						AI2						AI3																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									

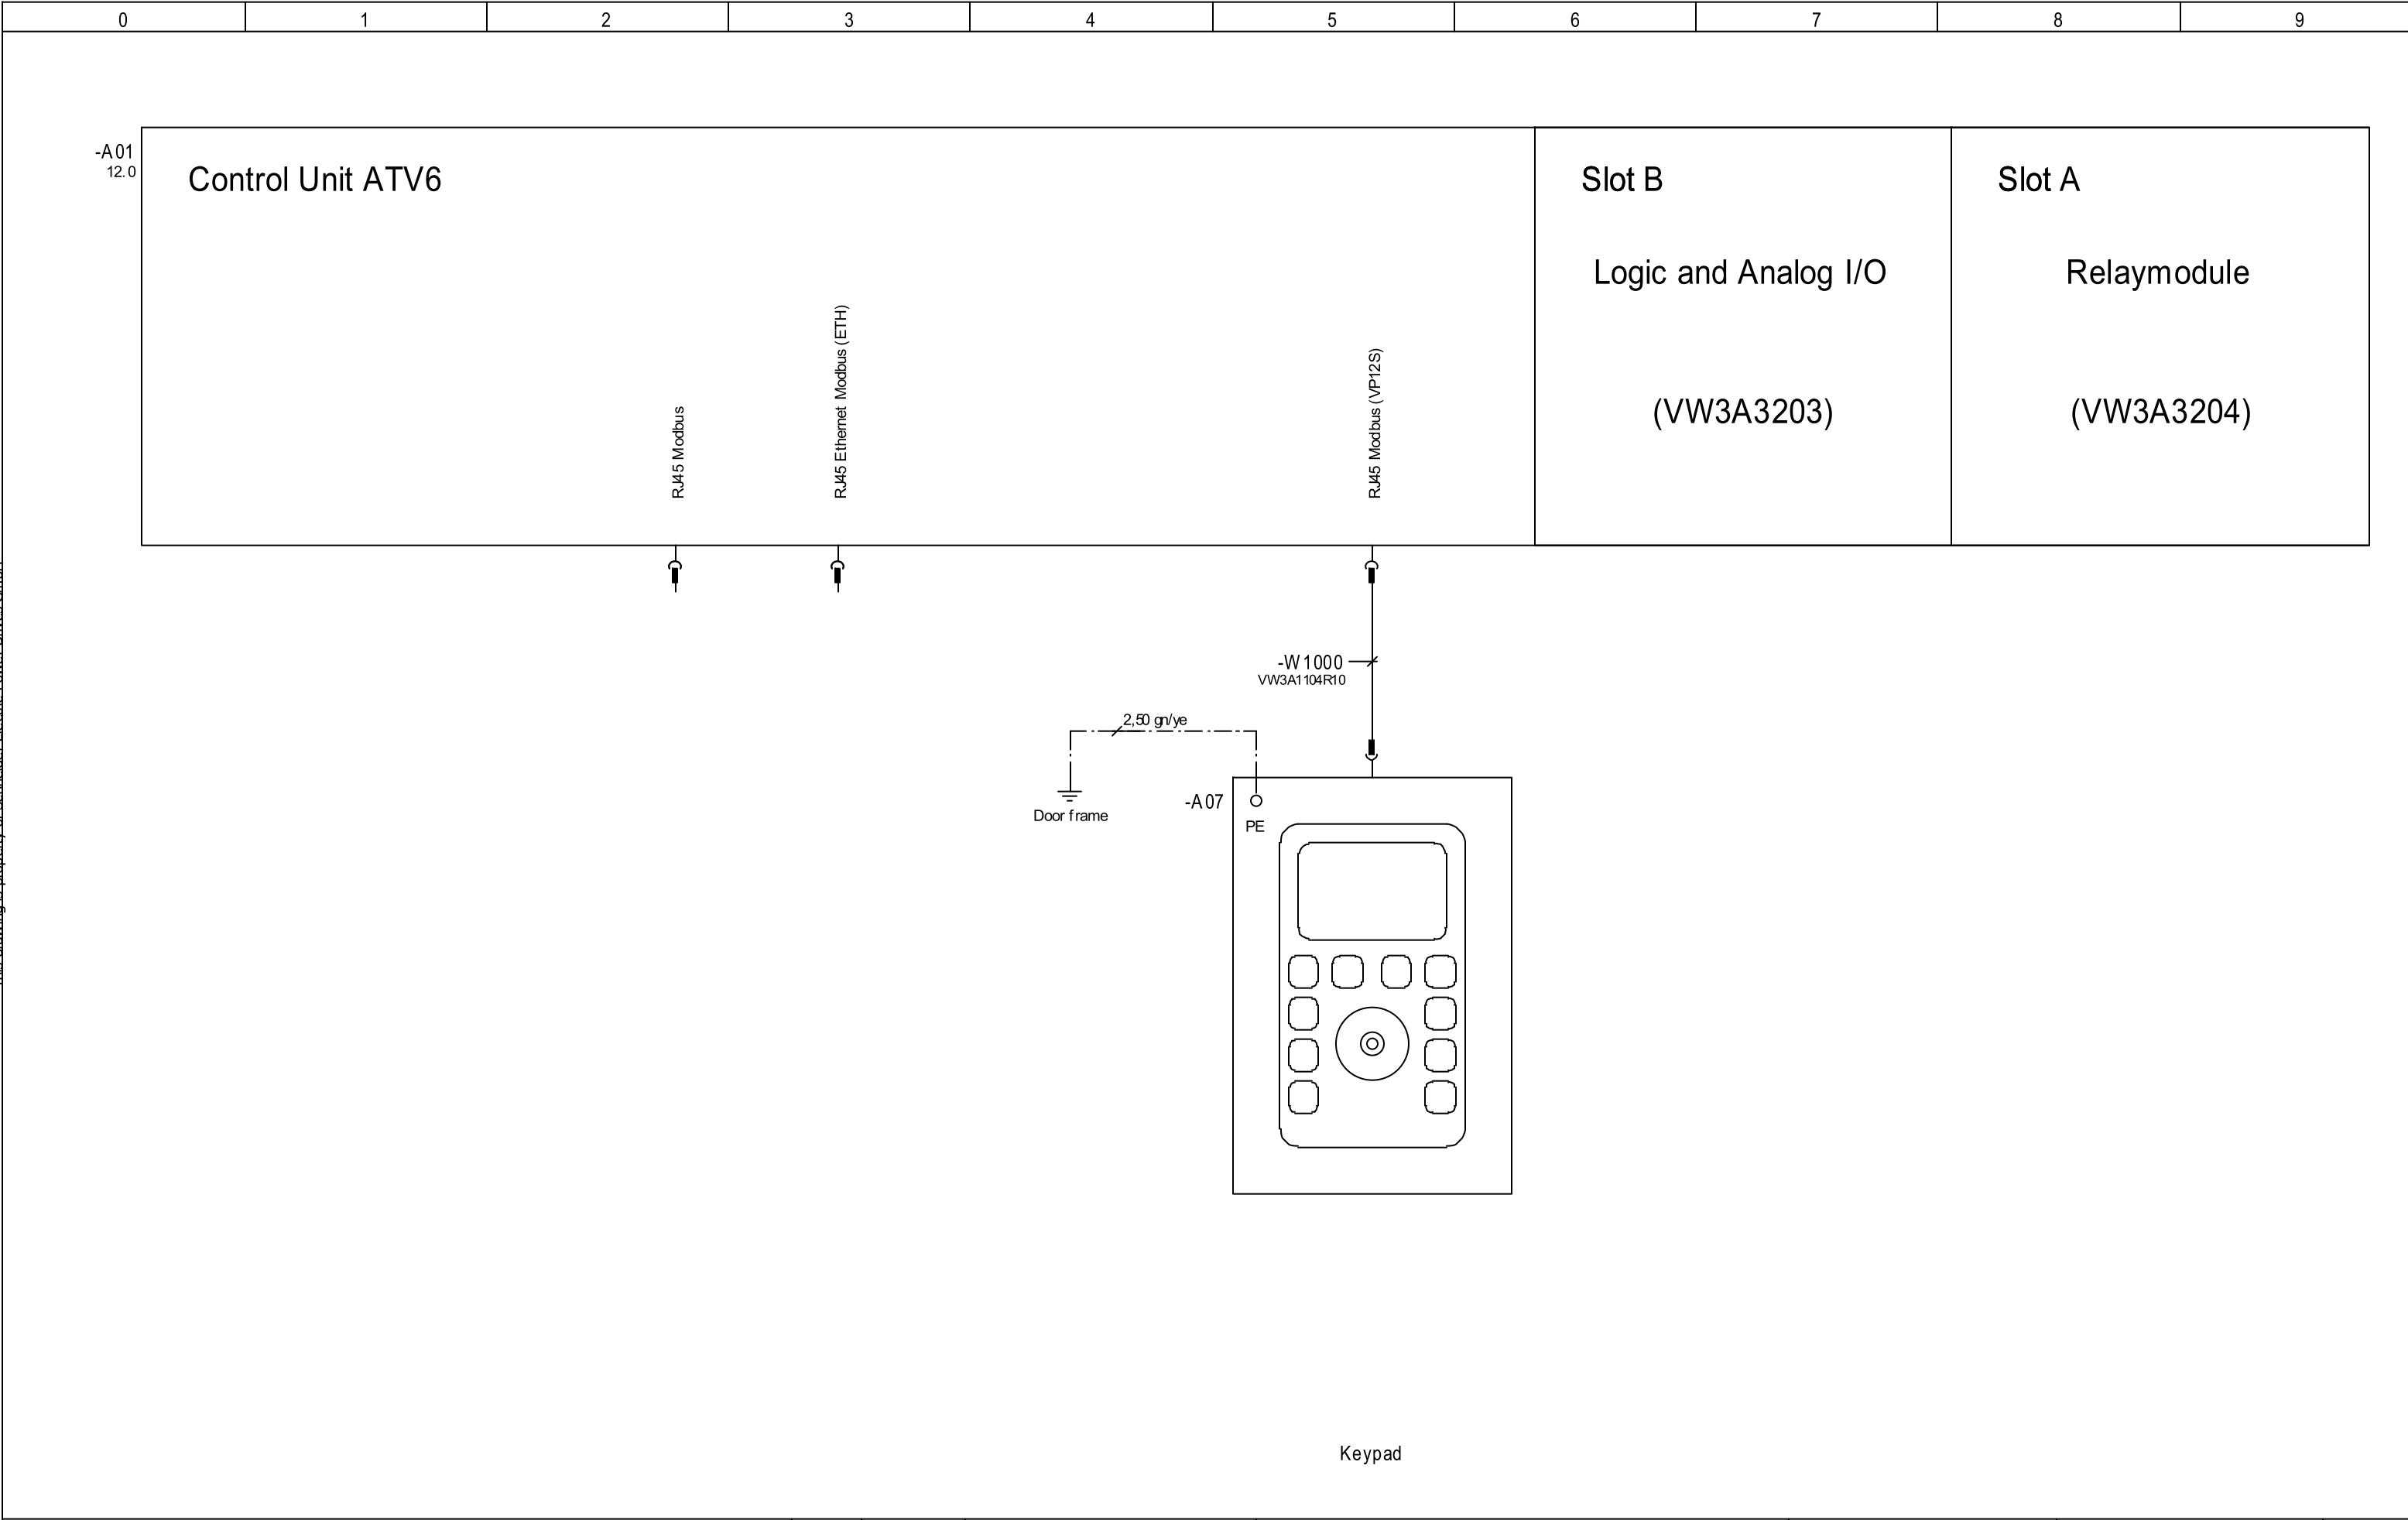

This drawing is property of Schneider Electric Power Drives GmbH

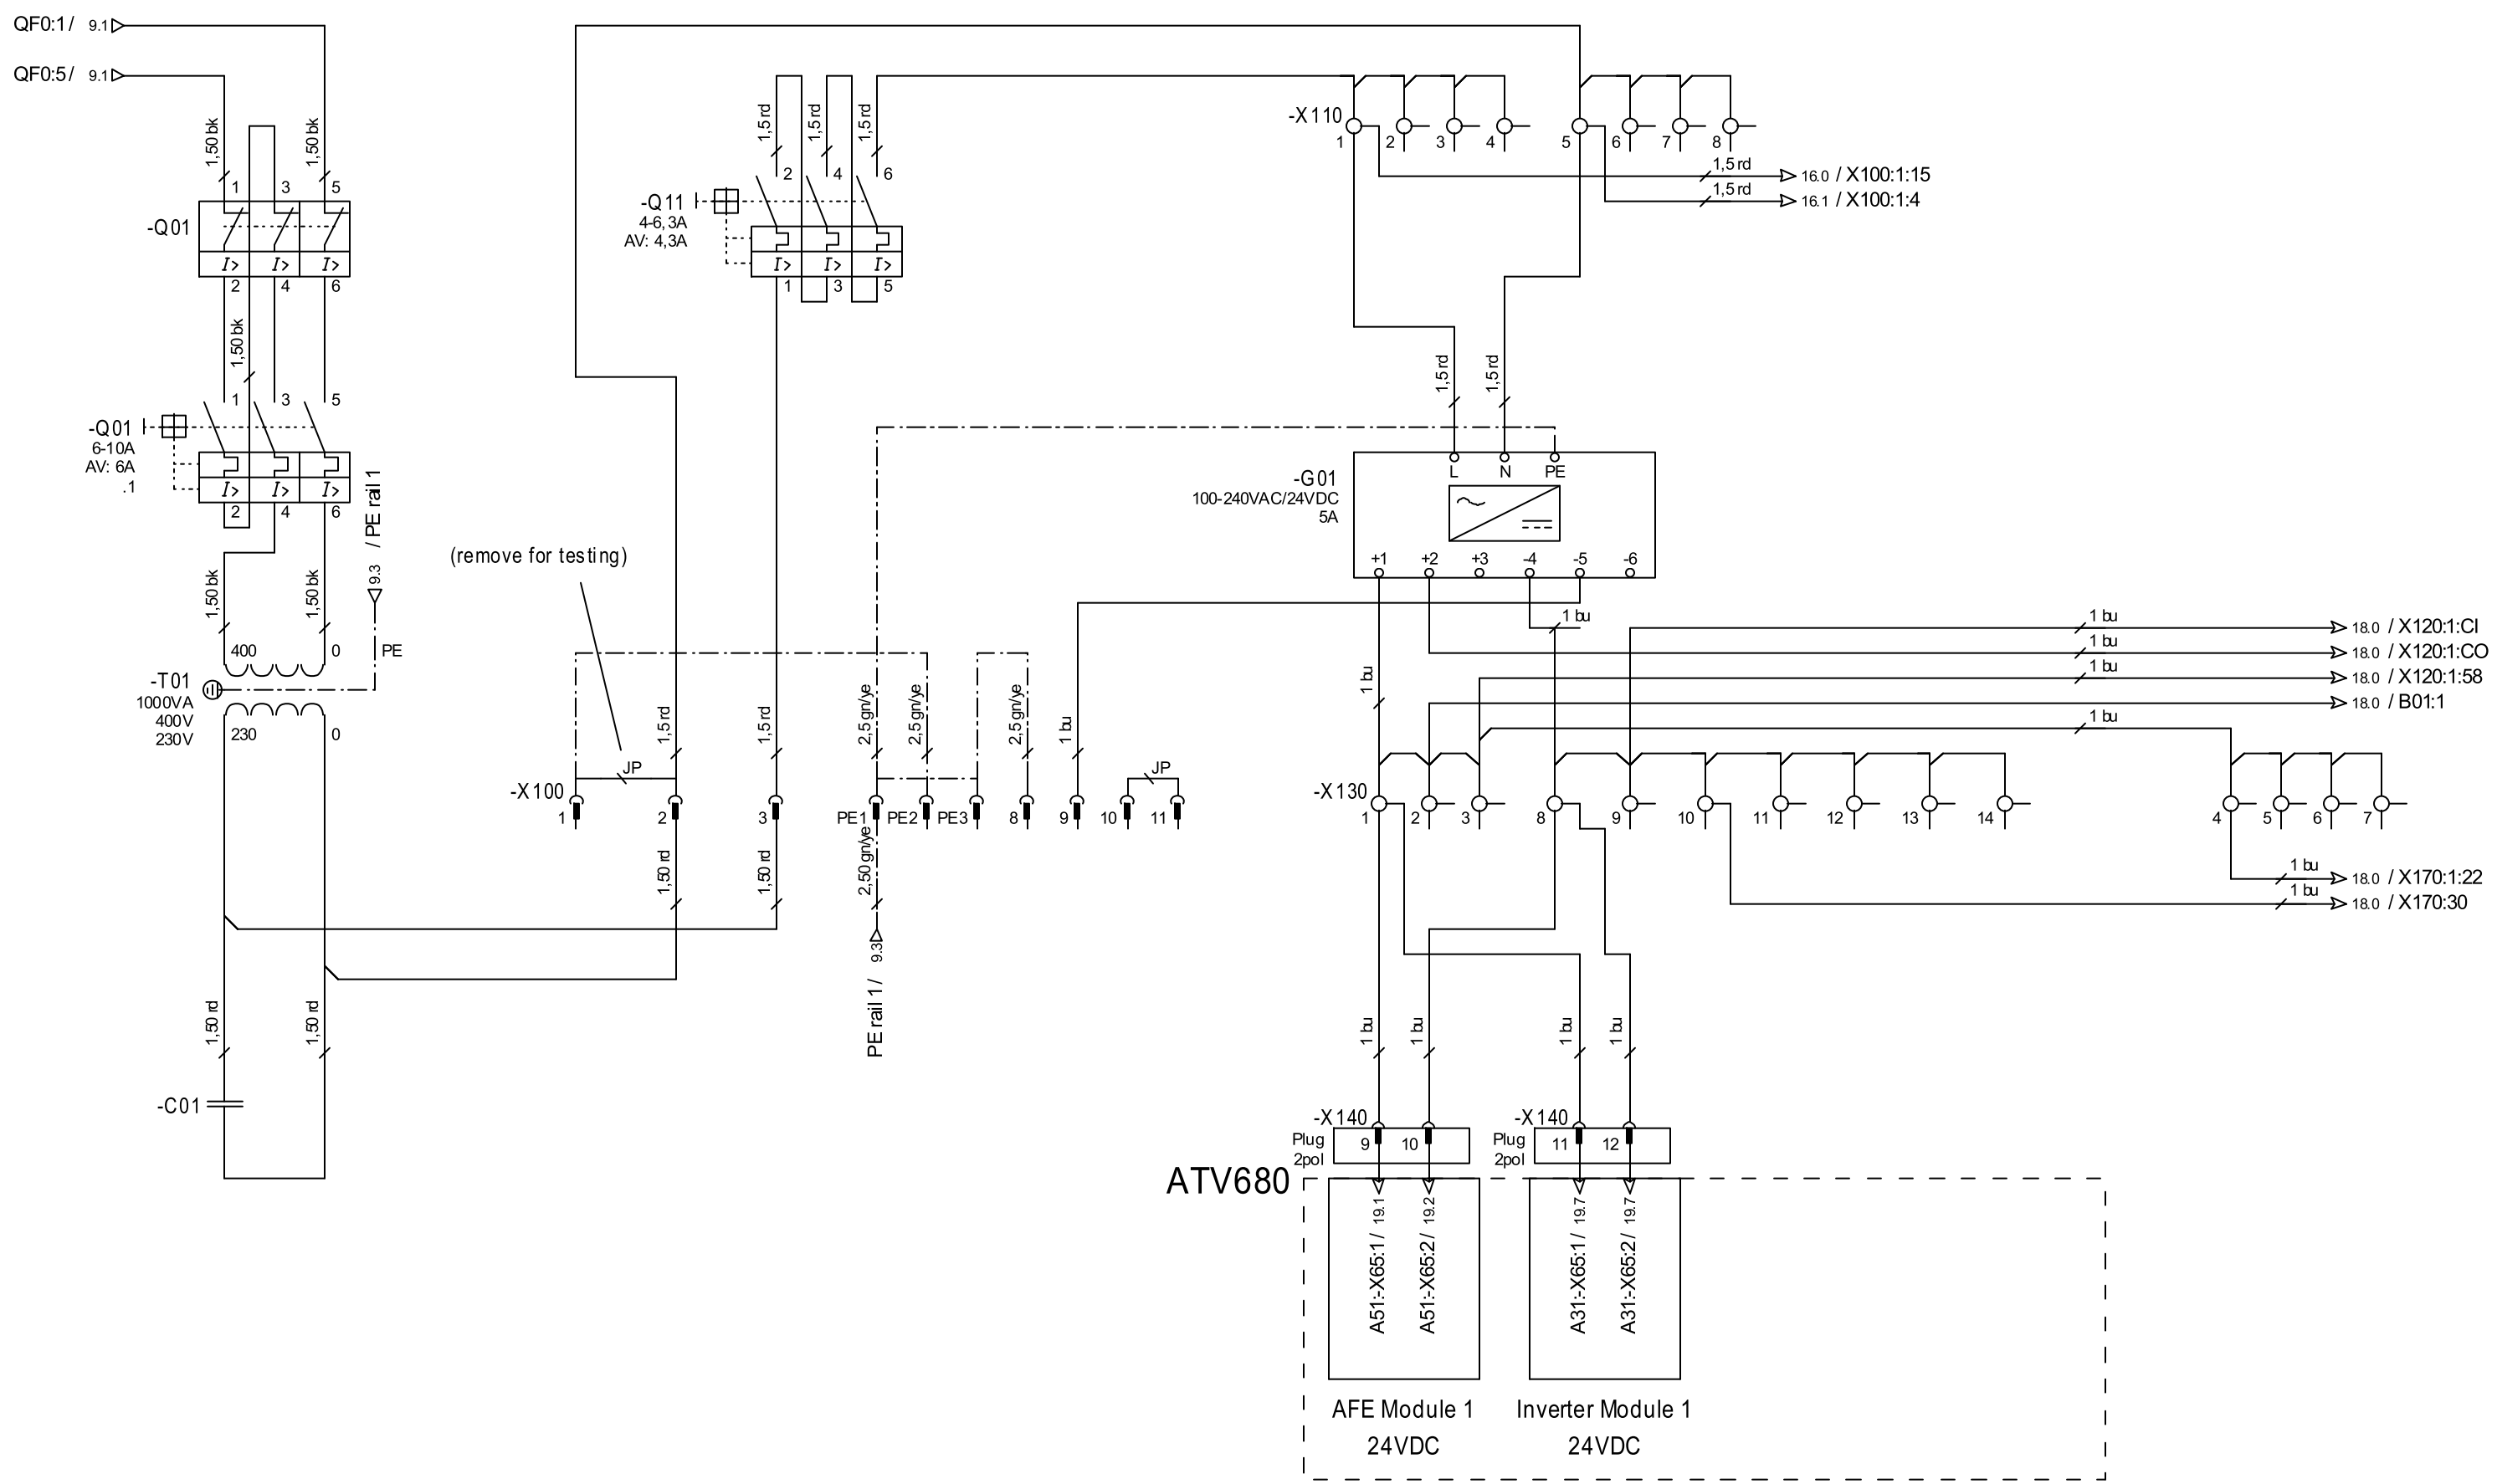

Control transformer 230V, power supply unit 24V


Date	17.08.2026
Design	Gill
Checked	Stojkov




ATV680C13Q4X1
SE d.o.o. (Croatia)
Nabla Plus-Sintaksa

=	+	Page 15
8AP5126.00/00		


This drawing is property of Schneider Electric Power Drives GmbH

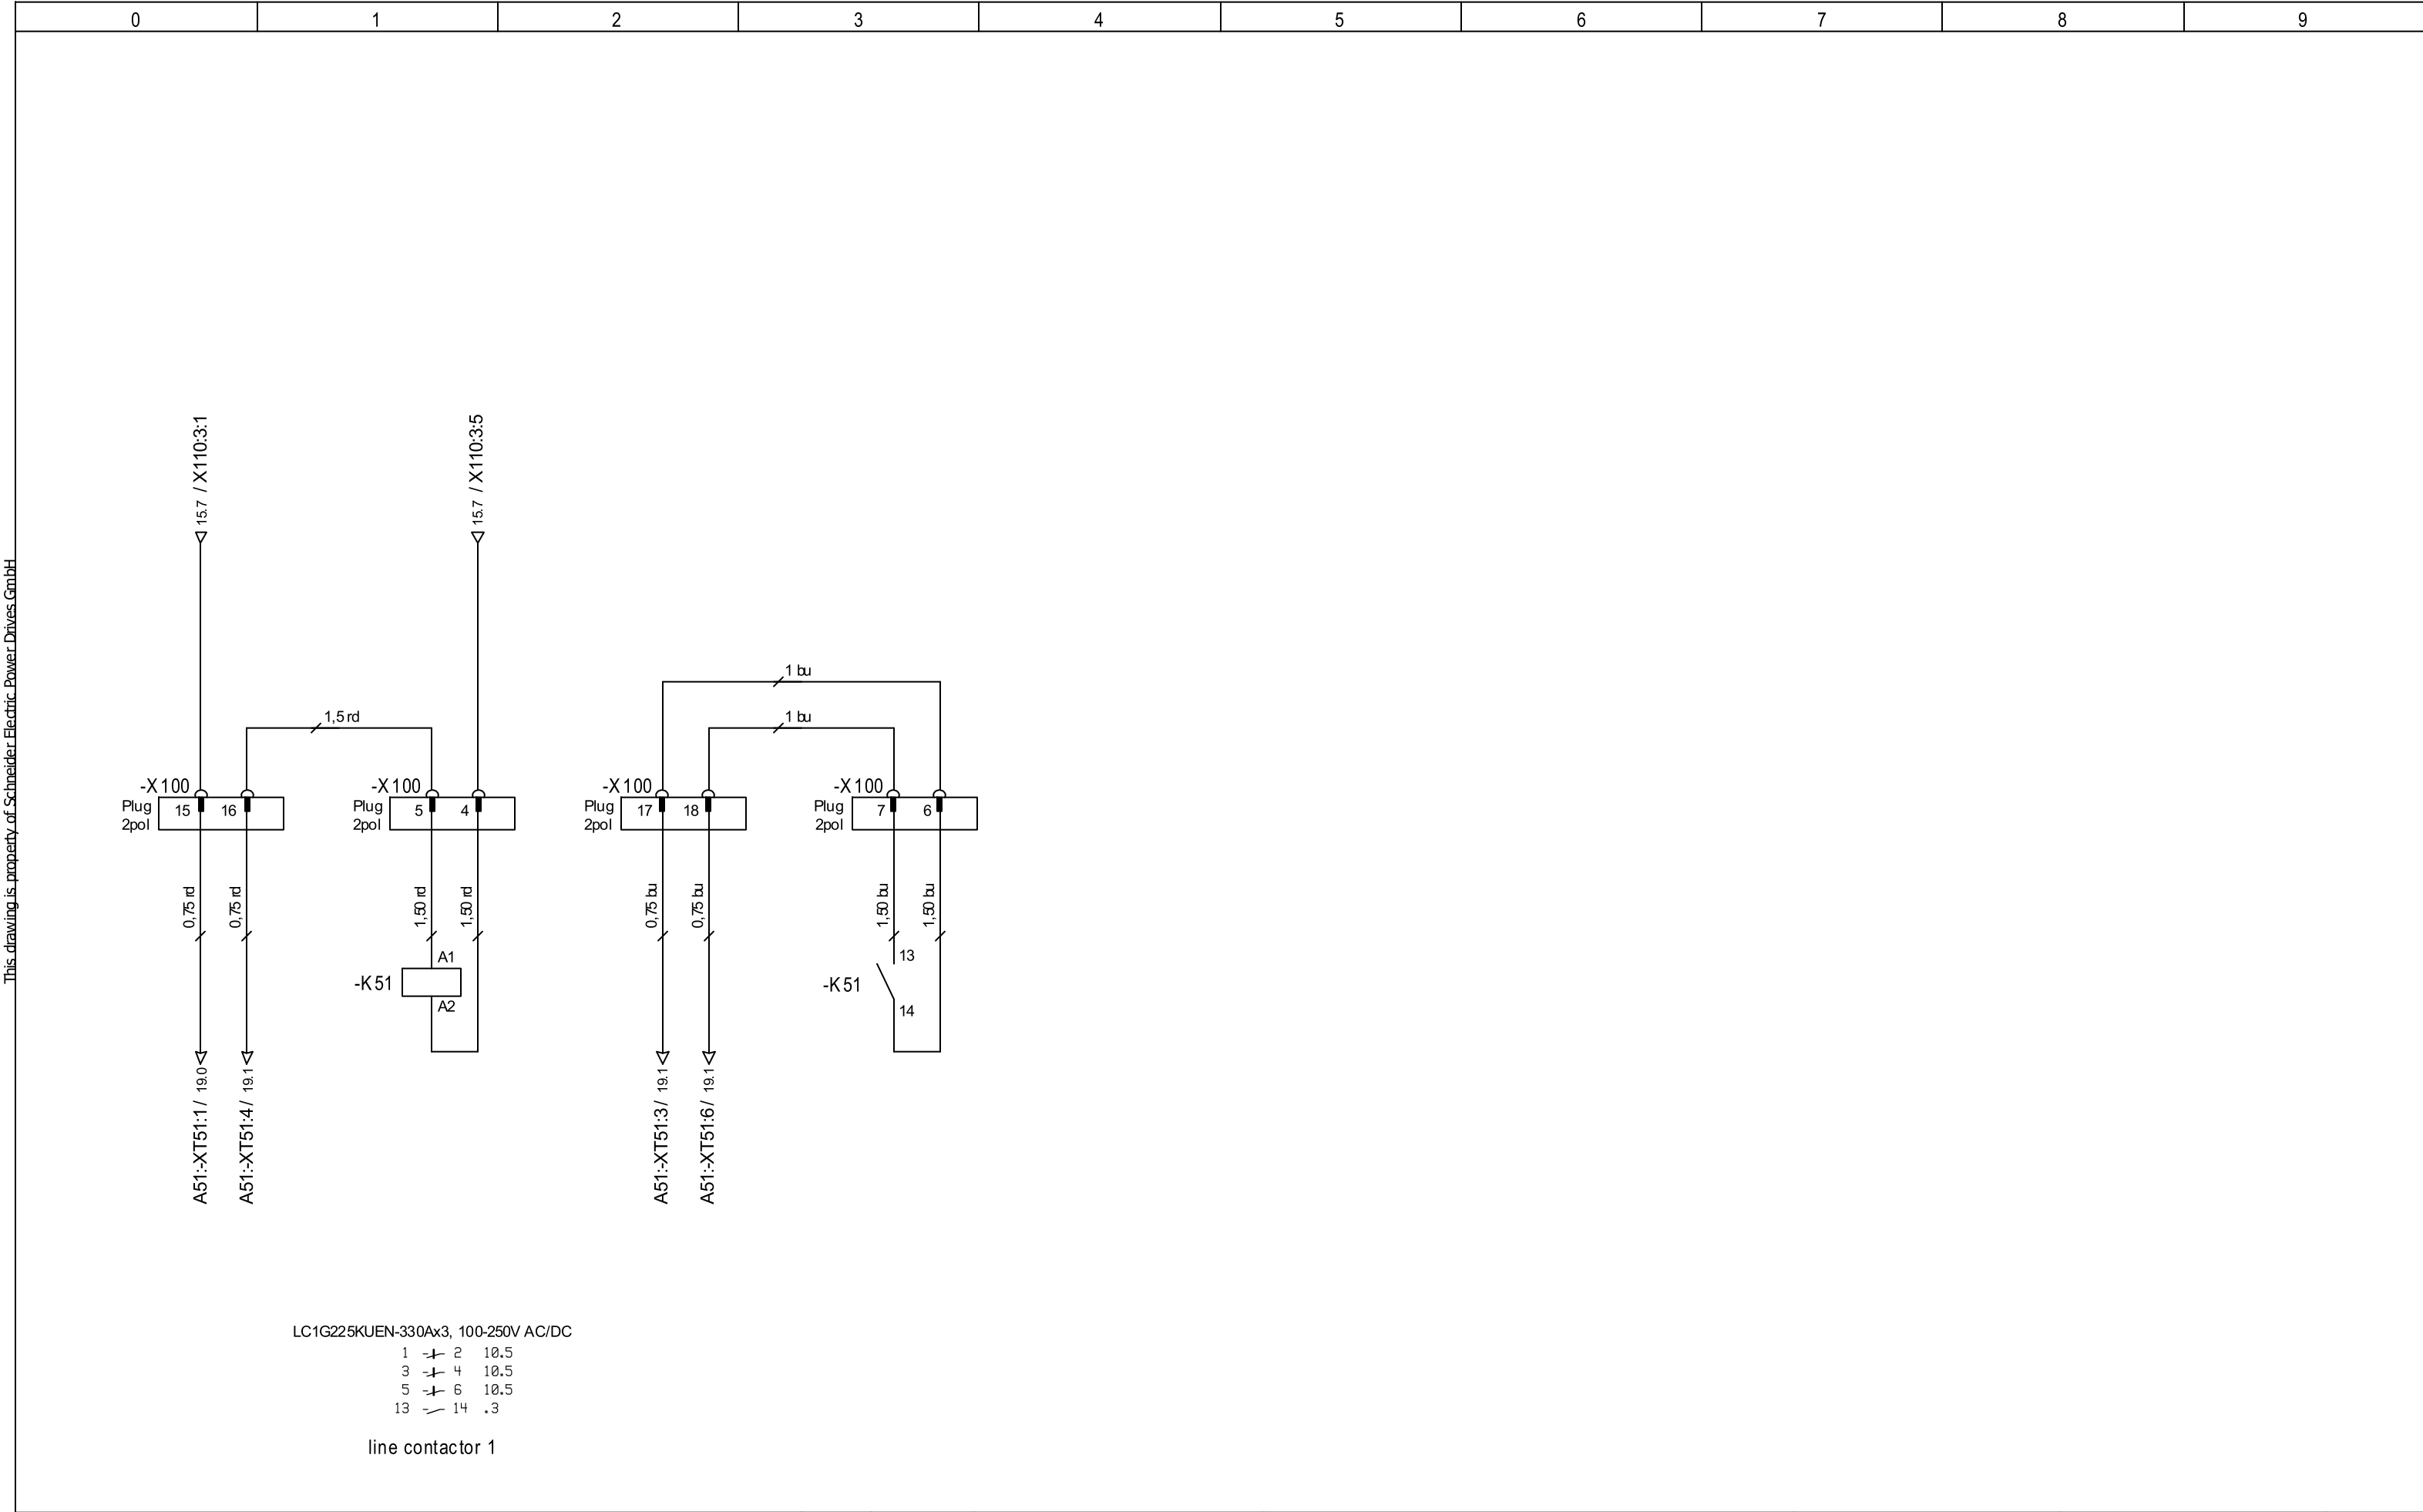




-A 03

Cabinet I/O extended



This drawing is property of Schneider Electric Power Drives GmbH

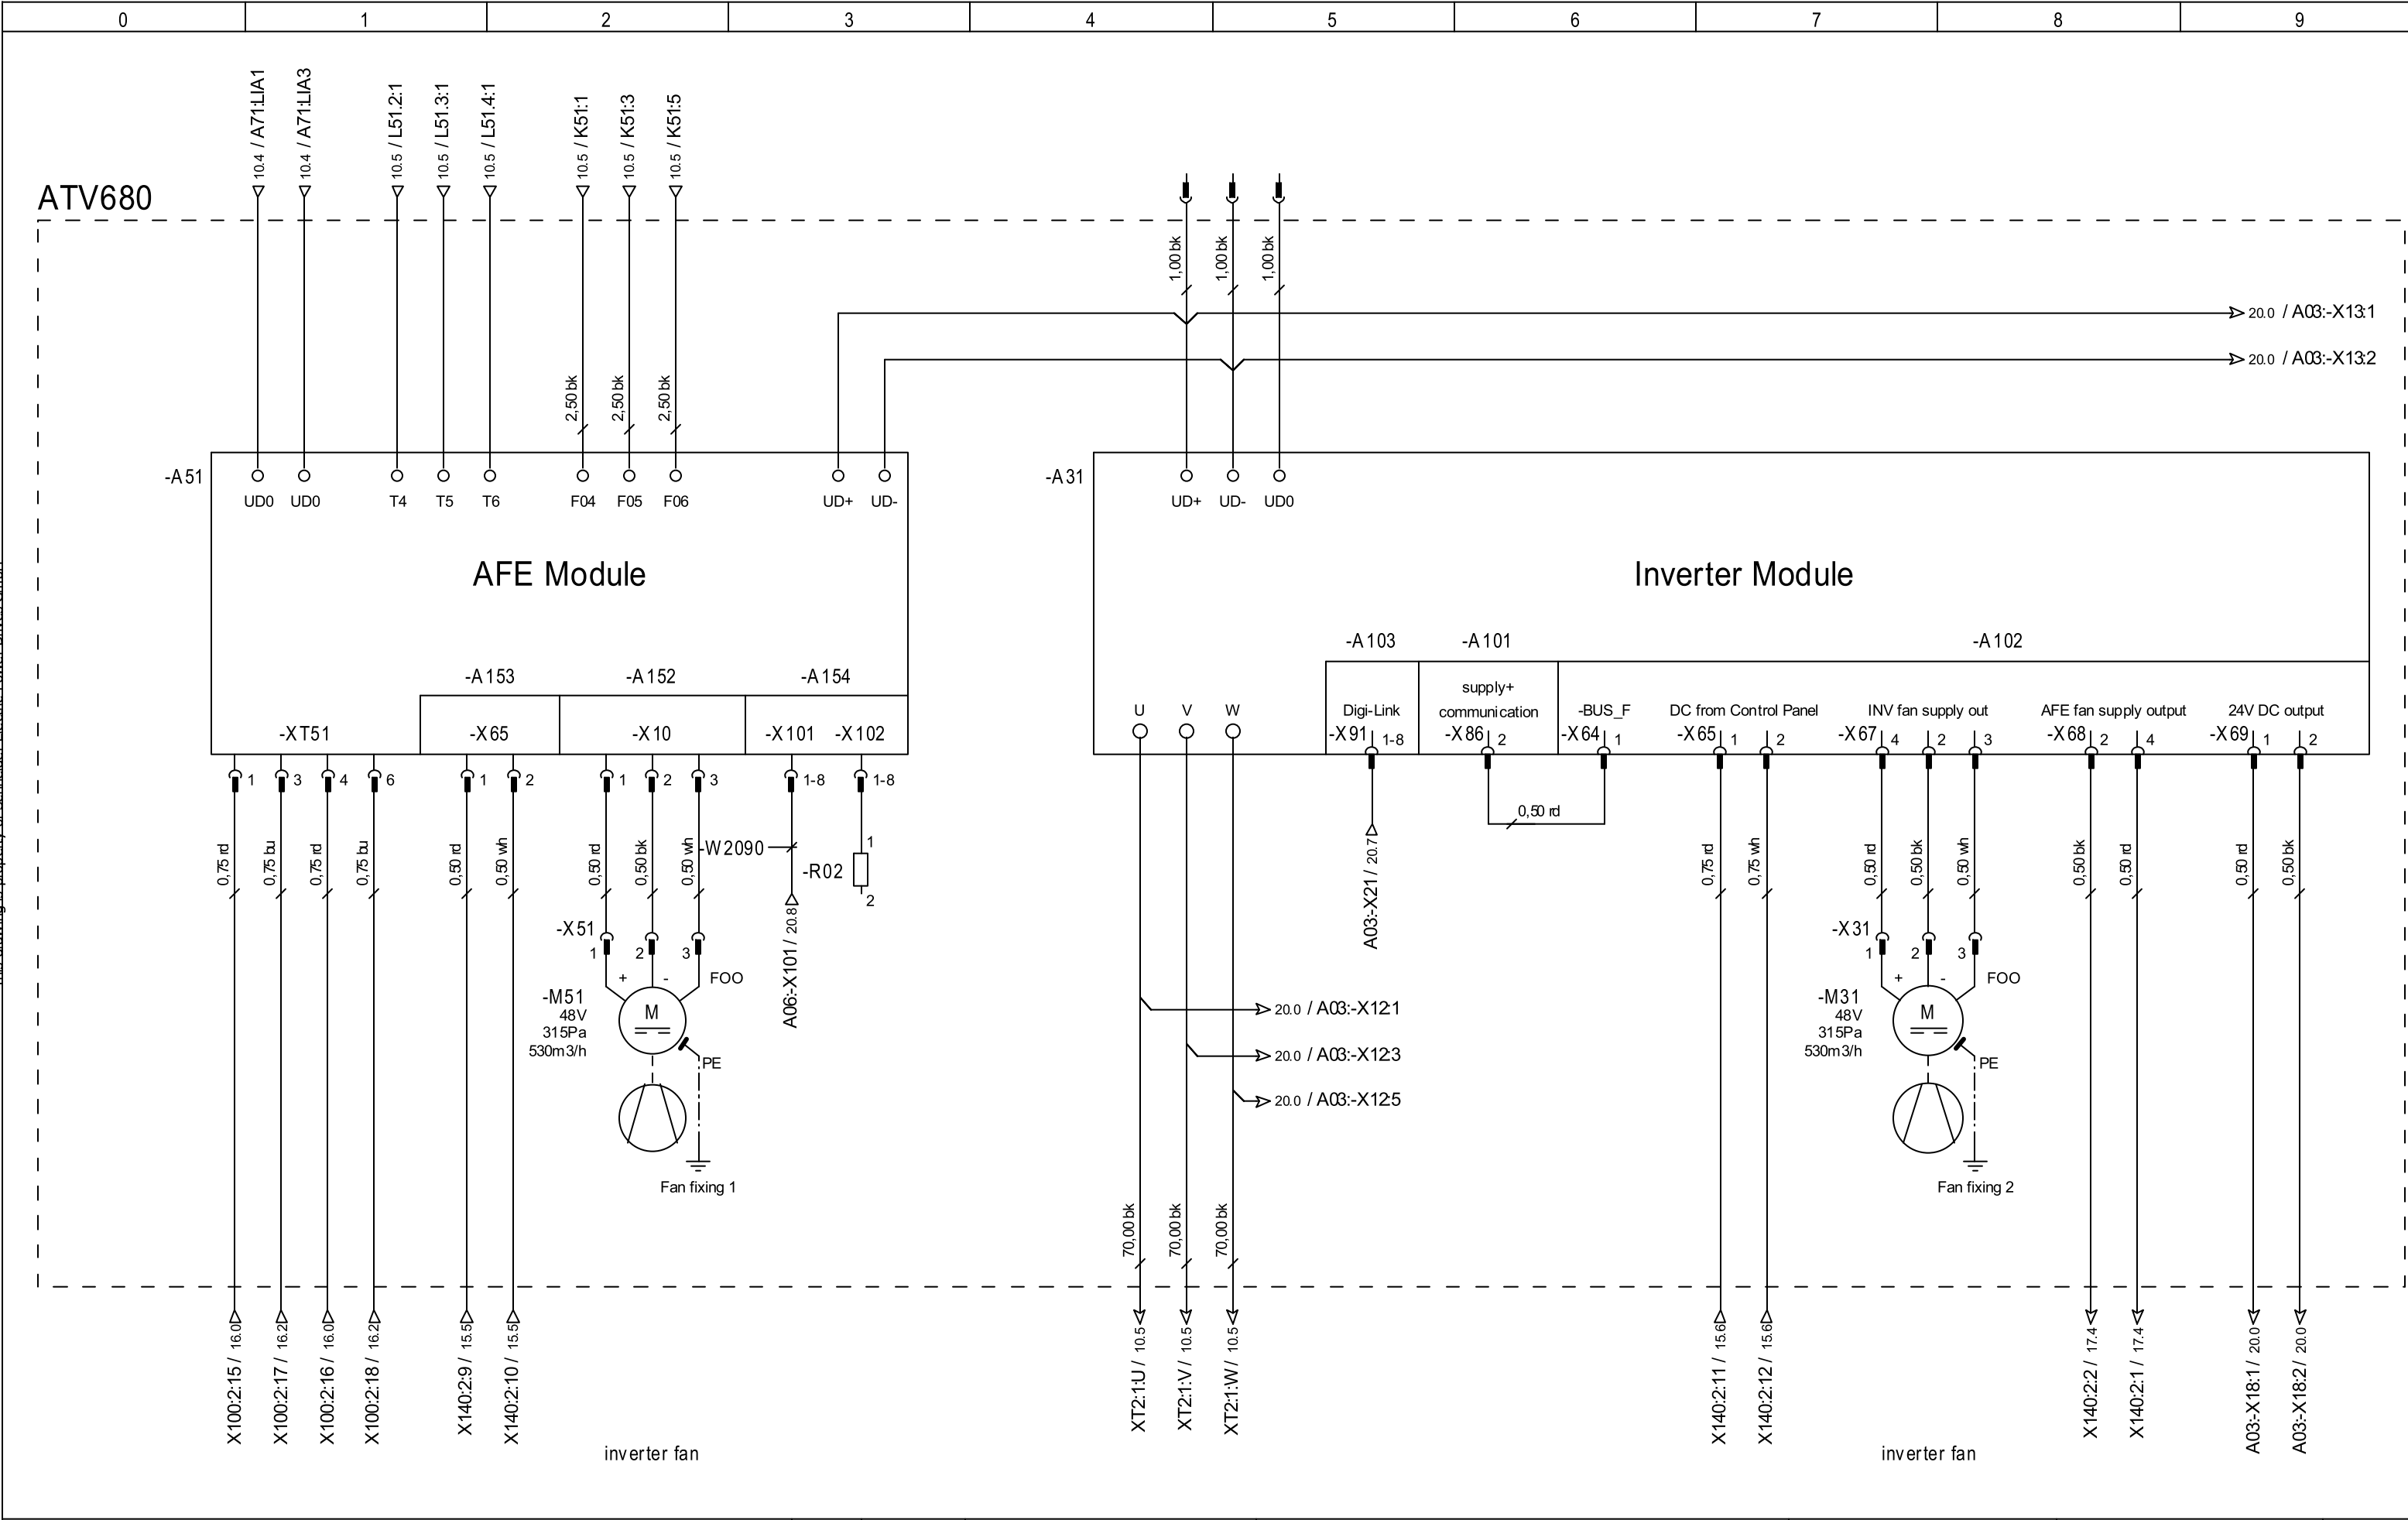

Frequenzy inverter


Date	17.08.2026
Design	Gill
Checked	Stojkov



ATV680C13Q4X1
SE d.o.o. (Croatia)
Nabla Plus-Sintaksa

=	+	Page 19
8AP5126.00/00		

This drawing is property of Schneider Electric Power Drives GmbH

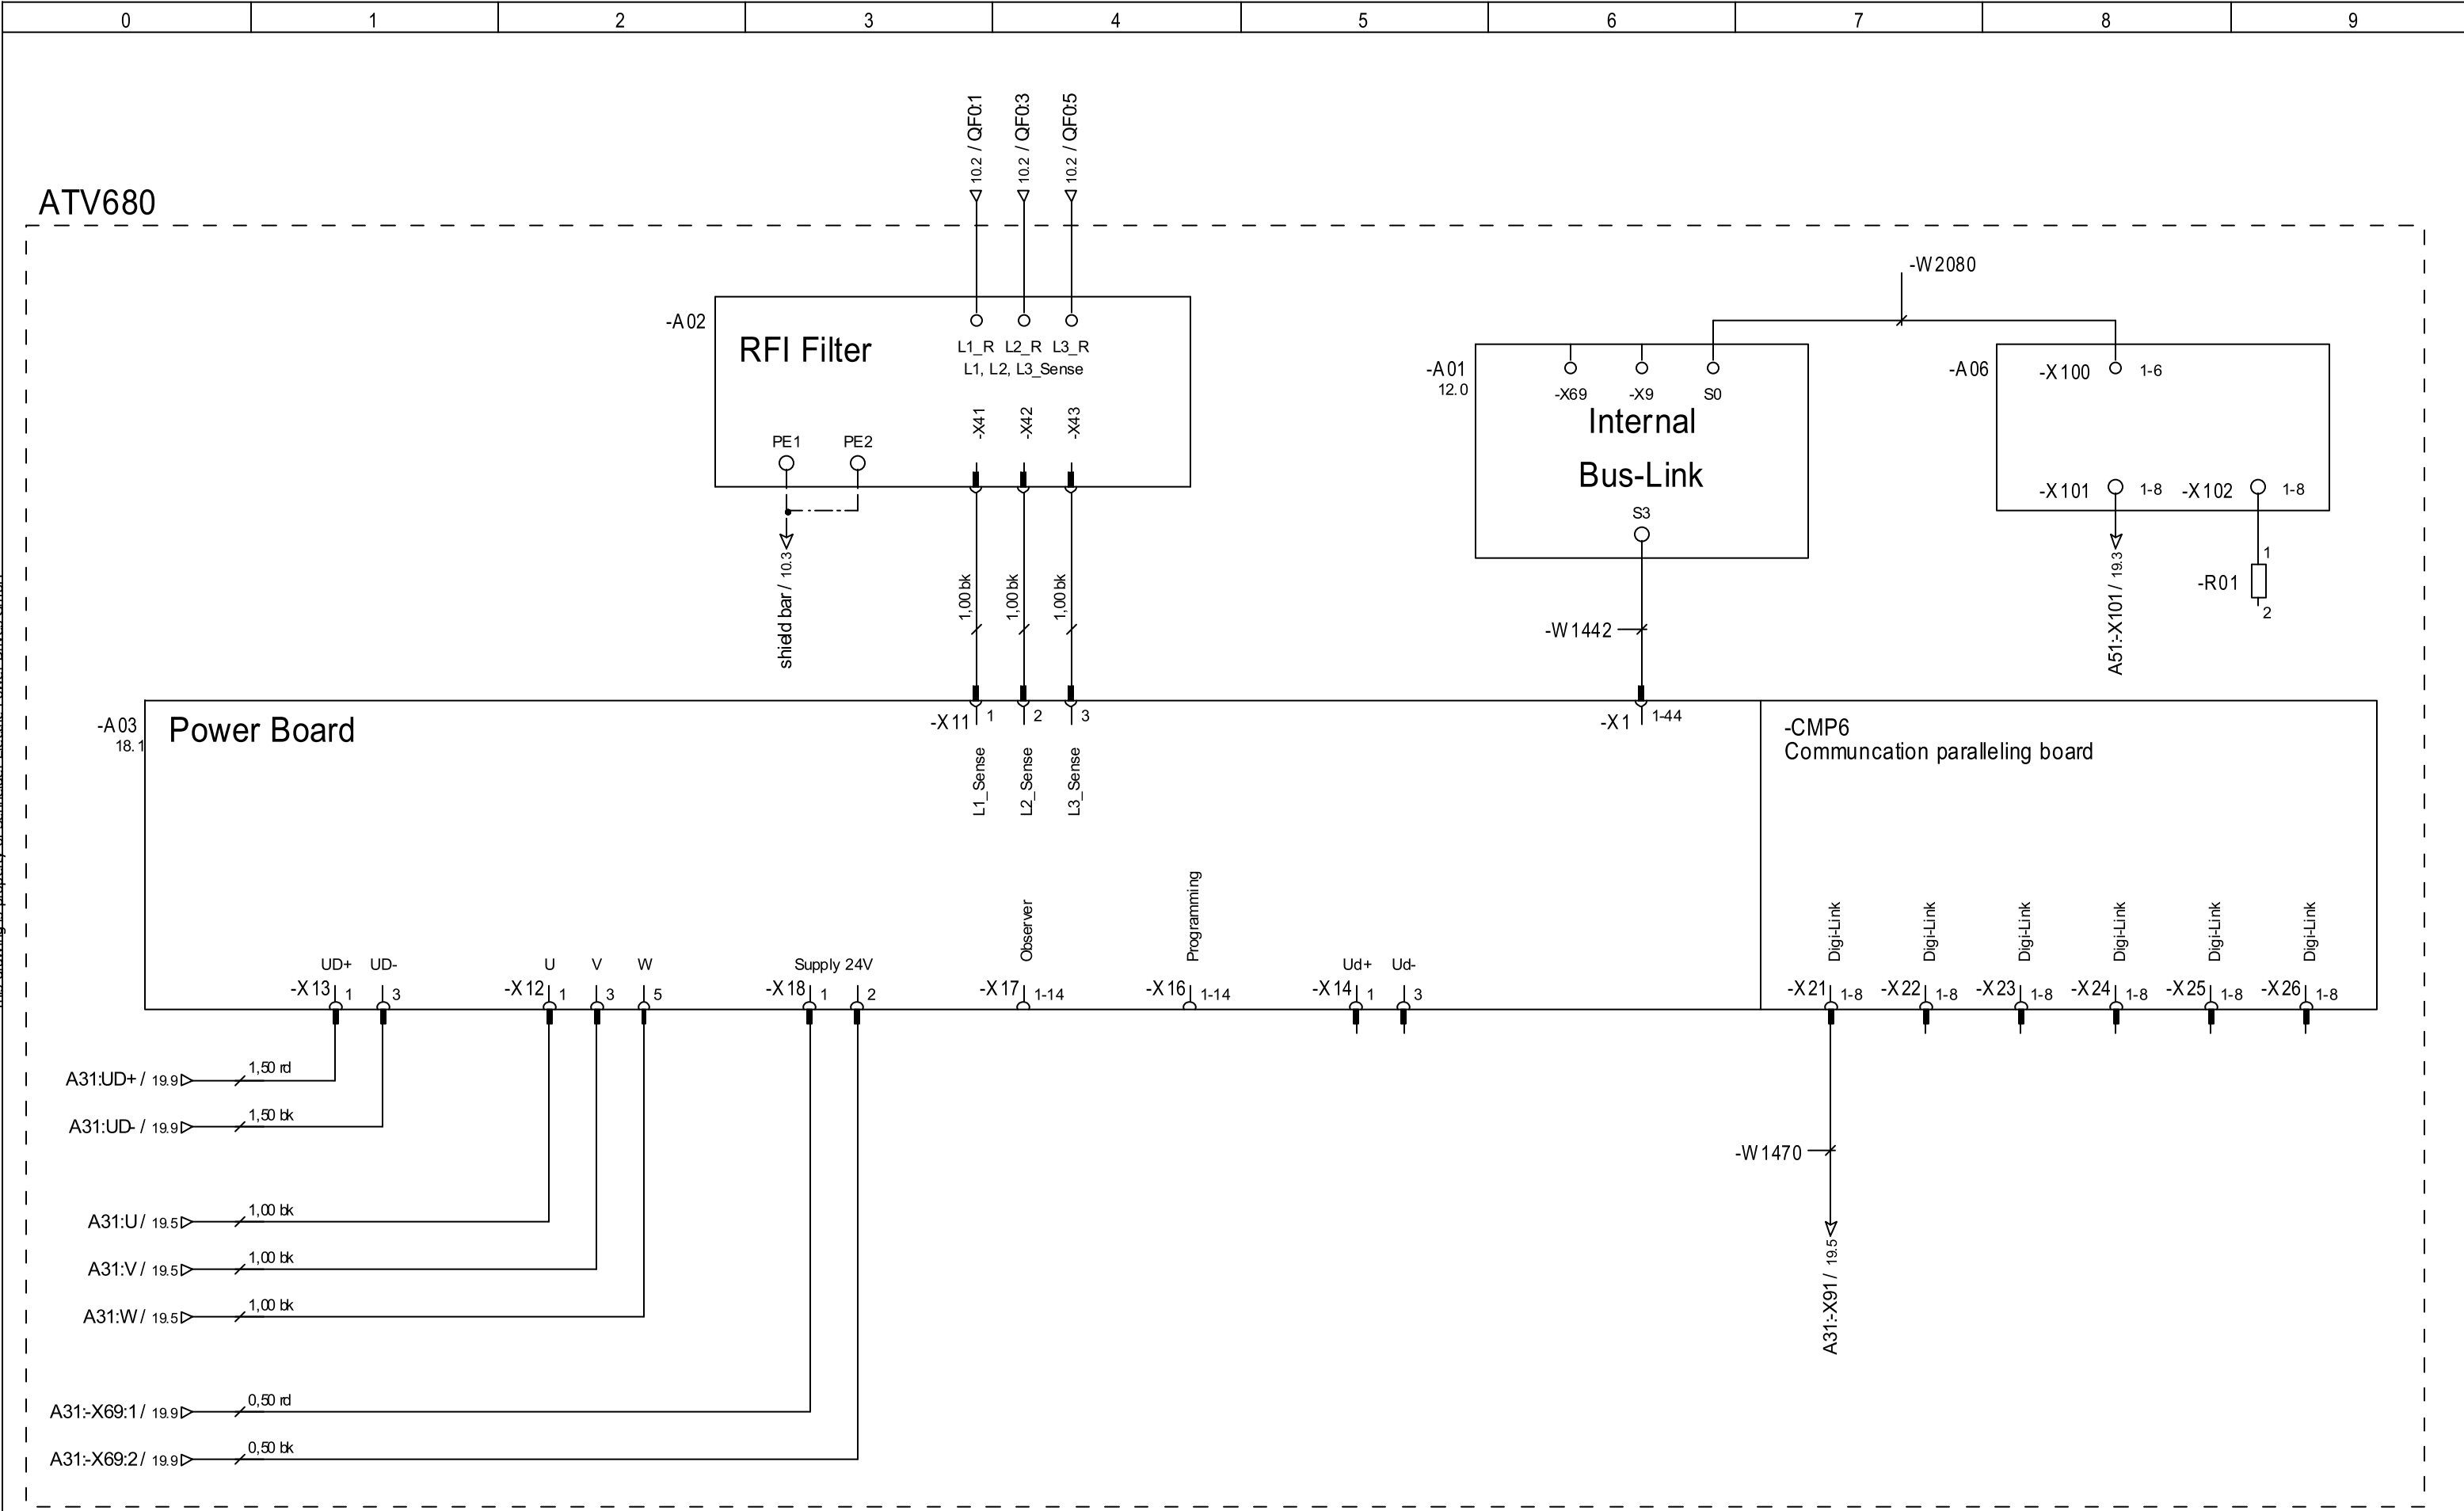

Terminal Strip Designation
-X100

[illegible]A 20x20 grid with 15 black squares forming a diagonal line from the top-left to the bottom-right. The squares are located at the following coordinates (row, column): (1, 1), (2, 2), (3, 3), (4, 4), (5, 5), (6, 6), (7, 7), (8, 8), (9, 9), (10, 10), (11, 11), (12, 12), (13, 13), (14, 14), and (15, 15).

Terminal Strip Designation

-X110

[illegible]

Terminal Strip Designation -X110								
Destination	Connection	Wire Colour	Terminal Nr.	Jumper	Page - Area	Destination	Connection	Wire Colour

[illegible]A full-page sheet of white graph paper with a light gray grid. The grid consists of small squares, approximately 10 units wide by 10 units high. There are two small black square marks near the top right corner of the page.[illegible][illegible]

Terminal Strip Designation
-X120

[illegible]

A 20x20 grid with black squares at the following coordinates (row, column):

1	5																		
2		5																	
3	5																		
4			5																
5	5																		
6	5																		
7	5																		
8	5																		
9			5																
10			5																
11				5															
12			5																
13					5														
14			5																
15						5													
16							5												
17								5											
18									5										
19										5									
20											5								

Terminal Strip Designation
-X 1 3 0

[illegible]

A scatter plot on a grid showing a positive linear trend. The data points are approximately at (1, 95), (2, 85), (3, 75), (4, 65), (5, 55), (6, 45), (7, 35), (8, 25), (9, 15), and (10, 5).

Terminal Strip Designation
-X140

Terminal Strip Designation								
-X140								
Destination	Connection	Wire Colour	Terminal Nr.	Jumper	Page - Area	Destination	Connection	Wire Colour

[illegible][illegible]

Terminal Strip Designation

-X170

[illegible]

A scatter plot on a 20x20 grid. The data points are located at approximately (1, 18), (2, 17), (3, 16), (4, 14), (5, 12), (6, 10), (7, 8), (8, 6), (9, 4), (10, 2), (11, 1), (12, 0), (13, 0), (14, 0), (15, 0), (16, 0), (17, 0), (18, 0), (19, 0), (20, 0). The points show a downward trend, starting at a high y-value for low x and decreasing as x increases, eventually leveling off at y=0 for x values greater than 12.

Terminal Strip Designation

-X170

[illegible]This image shows a full page of blank graph paper. The grid consists of small, equal-sized squares formed by thin black lines. There are no margins, text, or other markings on the page.

Terminal Strip Designation

-X195

[illegible]

Terminal Strip Designation

-X200

[illegible]This image shows a full page of blank graph paper. The grid consists of small, equal-sized squares formed by thin black lines. There are no margins, text, or other markings on the page.

Terminal Strip Designation

-X205

Terminal Strip Designation								
-X205								
Destination	Connection	Wire Colour	Terminal Nr.	Jumper	Page - Area	Destination	Connection	Wire Colour

[illegible][illegible][illegible]

-XT 1

[illegible]A full page of blank graph paper with a uniform grid of small squares. The grid covers the entire area of the page, leaving no margins or additional markings.

Terminal Strip Designation

-XT2

[illegible][illegible]

This drawing is property of Schneider Electric Power Drives GmbH

0	1	2	3	4	5	6	7	8	9								
Bill of Materials																	
Ident. No.	Quantity	Designation	Reference	Producer	Stock No.	Page-Path											
-A01	1	Control Unit	400V - ATV660,680	Schneider Electric	NHA37081	12.0											
-A01	1	extension card	Logic and Analog I/O card	Schneider Electric	VW3A3203	12.0											
-A01	1	extension card	3x Digital output	Schneider Electric	VW3A3204	12.0											
-A02	1	RFI Filter 400V	MCE Filter AC 400V	Jabil Circuit Co. Ltd	EAV97602	20.2											
-A03	1	Power board		Schneider Electric	PART OF CONTROL UNIT	20.0											
-A06	1	Module link		Schneider Electric	EAV97606	20.8											
-A07	1	Assembly Kit	VW3A1112	Schneider Electric	VW3A1112	14.5											
-A31	1	Inverter module	132kW	Schneider Electric	NHA21901	19.4											
-A51	1	AFE module	400V 132kW	Schneider Electric	NHA55081	19.0											
-A51	1	Coupling RJ45	female pin - female pin - 1689064	Phoenix Contact	NHA90274	19.0											
-A71	1	AFE Filter Module	400V 160kW	Schneider Electric	QGH70696	10.3											
-B01	1	holder for thermostat		Schneider Electric	HUA42850	18.4											
-B01	1	Thermostat	0-60°C	Microtherm	NVE25549	18.4											
-B51	1	Thermostat	0-60°C	Schneider Electric	NSYCCOTHC	11.6											
-C01	1	Capacitor	30uF 5% -25°C/70°C	Kement	HUA40570	15.1											
-E51	1	cubicle heating	400W/230V	Schneider Electric	NSYCR400W230VV	11.7											
-E55	1	Cubicle light	10W/230VAC VDE	Schneider Electric	NSYLAMLDS	11.2											
Bill of materials			<table><tr><td>Date</td><td>17.08.2026</td></tr><tr><td>Design</td><td>Gill</td></tr><tr><td>Checked</td><td>Stojkov</td></tr><tr><td></td><td></td></tr></table>	Date	17.08.2026	Design	Gill	Checked	Stojkov				ATV680C13Q4X1 SE d.o.o. (Croatia) Nabla Plus-Sintaksa	=	+	Page 33	
Date	17.08.2026																
Design	Gill																
Checked	Stojkov																
						8AP5126.00/00											

This drawing is property of Schneider Electric Power Drives GmbH

0	1	2	3	4	5	6	7	8	9	
Bill of Materials										
Ident. No.	Quantity	Designation	Reference	Producer	Stock No.	Page-Path				
-F51	1	miniature circuit-breaker	6A/440V C 2P iC60H	Schneider Electric	A9F07206	11.6				
-F51.1	1	fuse	315A/690V sf aR size 1 - 170M3467	Cooper Bussmann	HUA38866	10.5				
-F55	1	miniature circuit breaker	2A/440V C 1+N iC60H	Schneider Electric	A9F07602	11.2				
-G01	1	power supply unit	100-240VAC/24VDC	Schneider Electric	ABLS1A24050	15.5				
-J01	2	cubicle side panel	600x2000 SFN RAL 7035	Schneider Electric	NSY2SPN206	9.5				
-J01	1	cubicle	600x600x2000 SFN RAL 7035	Schneider Electric	NSYSFN20660	9.5				
-J01	2	plinth element	SF W600xH200	Schneider Electric	NSYSPF6200	9.5				
-J01	2	plinth panel	SF T600xH200	Schneider Electric	NSYSPS6200	9.5				
-K51	1	contactor	LC1G225KUEN-330Ax3, 100-250V AC/DC	Schneider Electric	LC1G225KUEN	16.1				
-L51.1	1	filter choke	160kW	Leader electronic	NHA59179	10.5				
-L51.2	1	choke	boost choke	Leader electronic	EAV37447	10.5				
-L51.3	1	choke	boost choke	Leader electronic	EAV37447	10.5				
-L51.4	1	choke	boost choke	Leader electronic	EAV37447	10.5				
-M11	1	filter fan	48VDC, 0,5A, 330m³/h	Schneider Electric	NSYSFRSKA00031	17.2				
-M31	1	fan	48VDC 2,9A 315Pa 530m³/h	Schneider Electric	HRB54890	19.7				
-M51	1	fan	48VDC 2,9A 315Pa 530m³/h	Schneider Electric	HRB54890	19.2				
-P65	1	front element for indicator light	ORANGE	Schneider Electric	ZB4BV053	18.6				
Bill of materials			Date	17.08.2026		ATV680C13Q4X1 SE d.o.o. (Croatia) Nabla Plus-Sintaksa		=	+	Page 34
			Design	Gill						
			Checked	Stojkov						
8AP5126.00/00										

This drawing is property of Schneider Electric Power Drives GmbH

Bill of Materials

Ident. No.	Quantity	Designation	Reference	Producer	Stock No.	Page-Path
-P65	1	signal lamp	WHITE 24VDC/AC	Schneider Electric	ZB4BVB1	18.6
-P66	1	front element for indicator light	GREEN	Schneider Electric	ZB4BV033	18.6
-P66	1	signal lamp	WHITE 24VDC/AC	Schneider Electric	ZB4BVB1	18.6
-P67	1	front element for indicator light	RED	Schneider Electric	ZB4BV043	18.7
-P67	1	signal lamp	WHITE 24VDC/AC	Schneider Electric	ZB4BVB1	18.7
-Q01	1	current limiter	GV1L3	Schneider Electric	GV1L3	15.1
-Q01	1	motor overload switch	GV2-RT14 - 6-10A	Schneider Electric	GV2RT14	15.1
-Q11	1	motor overload switch	GV2-RT10 - 4,0-6,3A	Schneider Electric	GV2RT10	15.3
-QF0	1	rotary drive with door clutch black	INS320 - 630	Schneider Electric	31052	9.1
-QF0	1	load break switch	INS320 - 320A/3 pol.	Schneider Electric	31108	9.1
-R01	1	terminating connector	CAN open	Schneider Electric	TCSCAR013M120	20.9
-R02	1	terminating connector	CAN open	Schneider Electric	TCSCAR013M120	19.3
-S55	1	cubicle door switch	10A / 500V - Spacial SF	Schneider Electric	NSYDCM20	11.2
-S61	1	Emergency stop pushbutton	ZB4BS844	Schneider Electric	ZB4BS844	12.8
-S61	1	auxiliary contact	1NC	Schneider Electric	ZB4BZ102	12.8
-S61	1	auxiliary contact	1NC	Schneider Electric	ZBE102	12.8
-S61	1	protective shroud emerg. stop	ZBZ1605 - yellow	Schneider Electric	ZBZ1605	12.8

This drawing is property of Schneider Electric Power Drives GmbH

0	1	2	3	4	5	6	7	8	9
Bill of Materials									
Ident. No.	Quantity	Designation	Reference	Producer	Stock No.	Page-Path			
-S65	1	key switch	ZB4BG4	Schneider Electric	ZB4BG4	18.4			
-S65	1	auxiliary contact	1NO; 1NC	Schneider Electric	ZB4BZ105	18.4			
-T01	1	transformer	400..480VAC/230V - 1000VA	JQH Everise	EAV52650_400	15.1			
F51.2	1	fuse	315A/690V sf aR size 1 - 170M3467	Cooper Bussmann	HUA38866	10.5			
F51.3	1	fuse	315A/690V sf aR size 1 - 170M3467	Cooper Bussmann	HUA38866	10.5			
				</					

This drawing is property of Schneider Electric Power Drives GmbH


0	1	2	3	4	5	6	7	8	9
Bill of Materials (Terminals)								Page reference in terminal diagram	
Ident. No.	Quantity	Designation	Reference			Producer		Stock No.	
-X100	6	plug	SP 2,5/ 1-R gnye - 3043093			Phoenix Contact		3A20108	
-X100	4	Double-level terminal block	STTB 2,5 2p PE - 3040067			Phoenix Contact		HUA38881	
-X100	2	plug	SP 2,5/ 1-R gy - 3043077			Phoenix Contact		HUA39540	
-X100	10	plug	SP 2,5/ 1-L gy - 3043019			Phoenix Contact		HUA39541	
-X100	5	plug	SP 2,5/ 1-M gy - 3043043			Phoenix Contact		HUA41264	
-X100	2	plug	SP 2,5/ 1-M gnye - 3043064			Phoenix Contact		HUA41266	
-X100	11	Double-level terminal block	STTB 2,5 2p - 3040054			Phoenix Contact		ST440-201-185	
-X110	8	spring-type terminal	ST 2,5-TWIN - 3031241			Phoenix Contact		HUA34111	
-X120	2	plug	SP 2,5/ 1-R gy - 3043077			Phoenix Contact		HUA39540	
-X120	2	plug	SP 2,5/ 1-L gy - 3043019			Phoenix Contact		HUA39541	
-X120	16	plug	SP 2,5/ 1-M gy - 3043043			Phoenix Contact		HUA41264	
-X120	10	Double-level terminal block	STTB 2,5 2p - 3040054			Phoenix Contact		ST440-201-185	
-X130	14	spring-type terminal	ST 2,5-TWIN - 3031241			Phoenix Contact		HUA34111	
-X140	8	plug	SP 2,5/ 1-R gy - 3043077			Phoenix Contact		HUA39540	
-X140	8	plug	SP 2,5/ 1-L gy - 3043019			Phoenix Contact		HUA39541	
-X140	8	Double-level terminal block	STTB 2,5 2p - 3040054			Phoenix Contact		ST440-201-185	
-X170	2	Double-level terminal block	STTB 2,5 2p PE - 3040067			Phoenix Contact		HUA38881	
Bill of materials			Date	17.08.2026		=		+	
			Design	Gill					
			Checked	Stojkov					
					ATV680C13Q4X1 SE d.o.o. (Croatia) Nabla Plus-Sintaksa		8AP5126.00/00		Page 37

Bill of Materials (Terminals)


Page reference in
terminal diagram

[illegible]




This drawing is property of Schneider Electric Power Drives GmbH

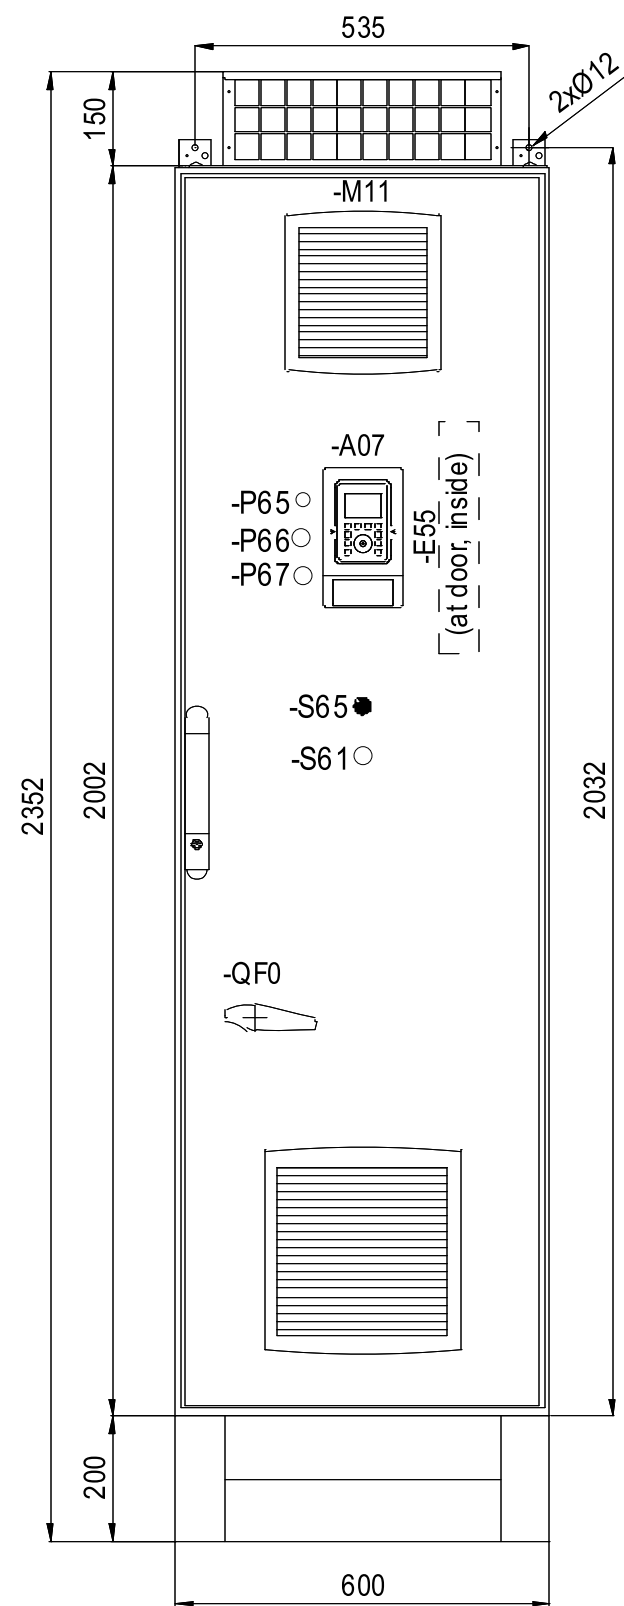

IP23 - Filters and Fan-Filter-Units without Filter Mats

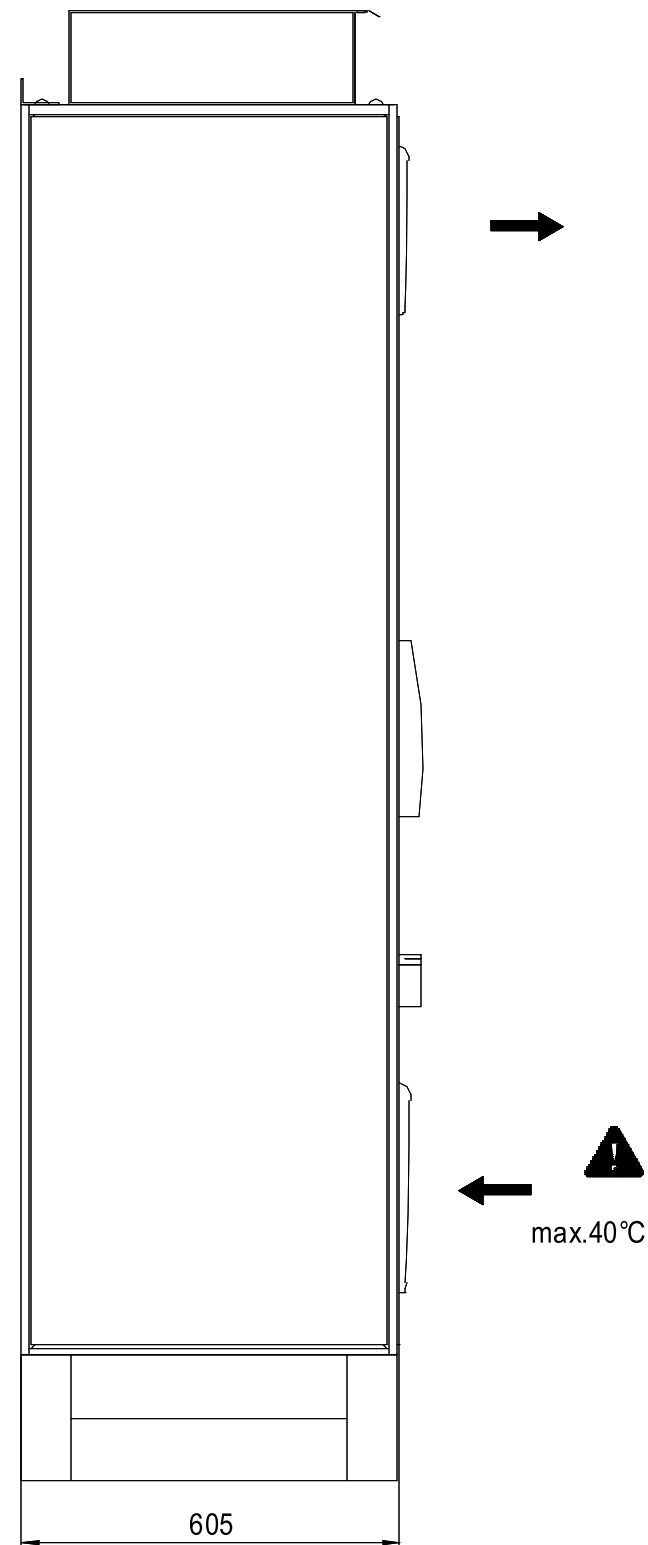


This drawing is property of Schneider Electric Power Drives GmbH

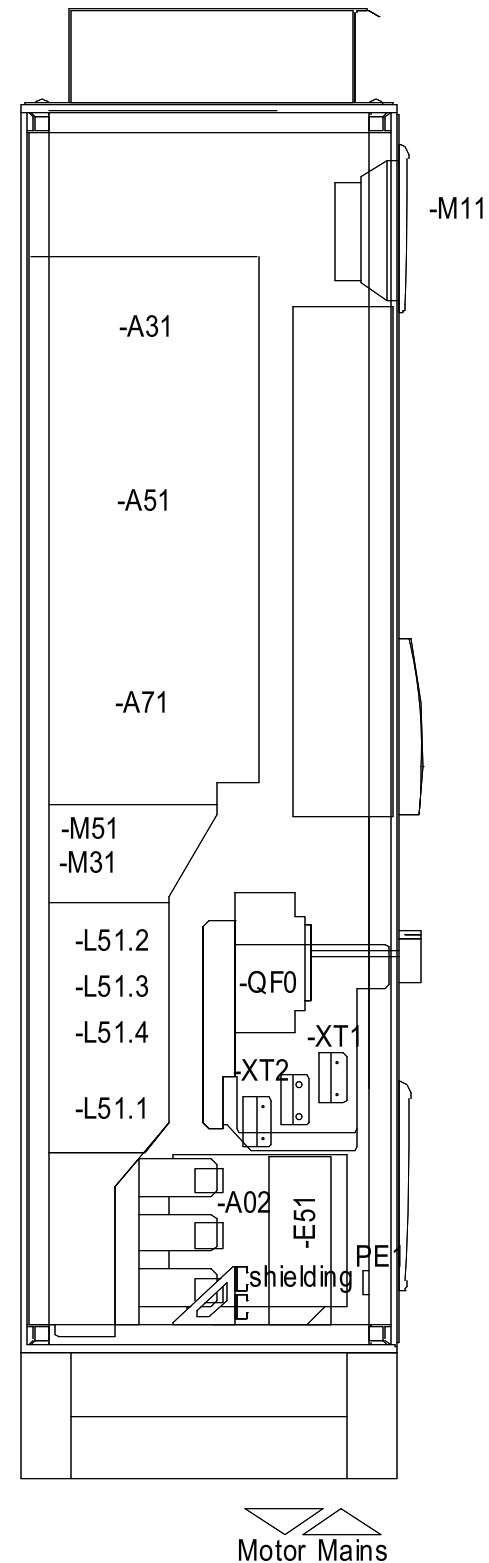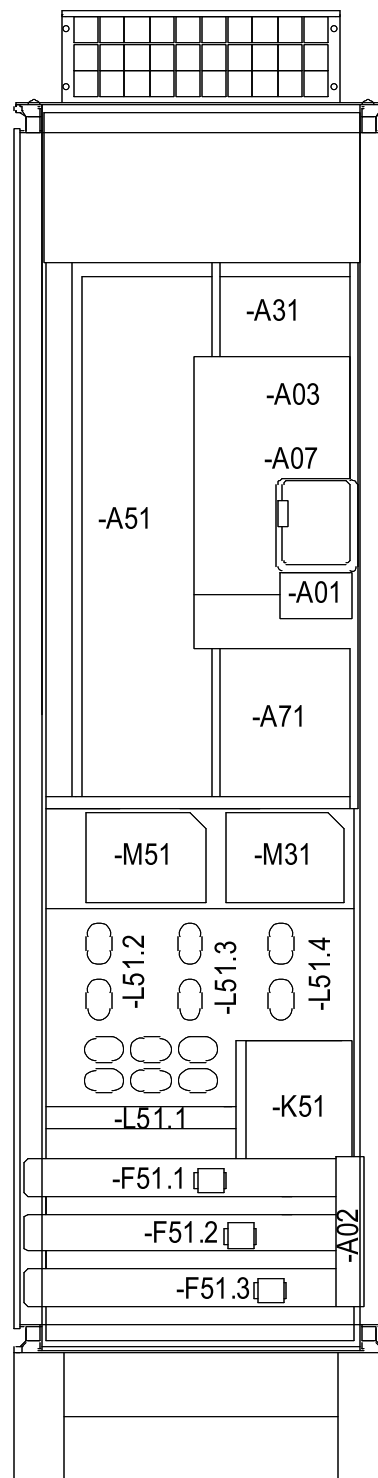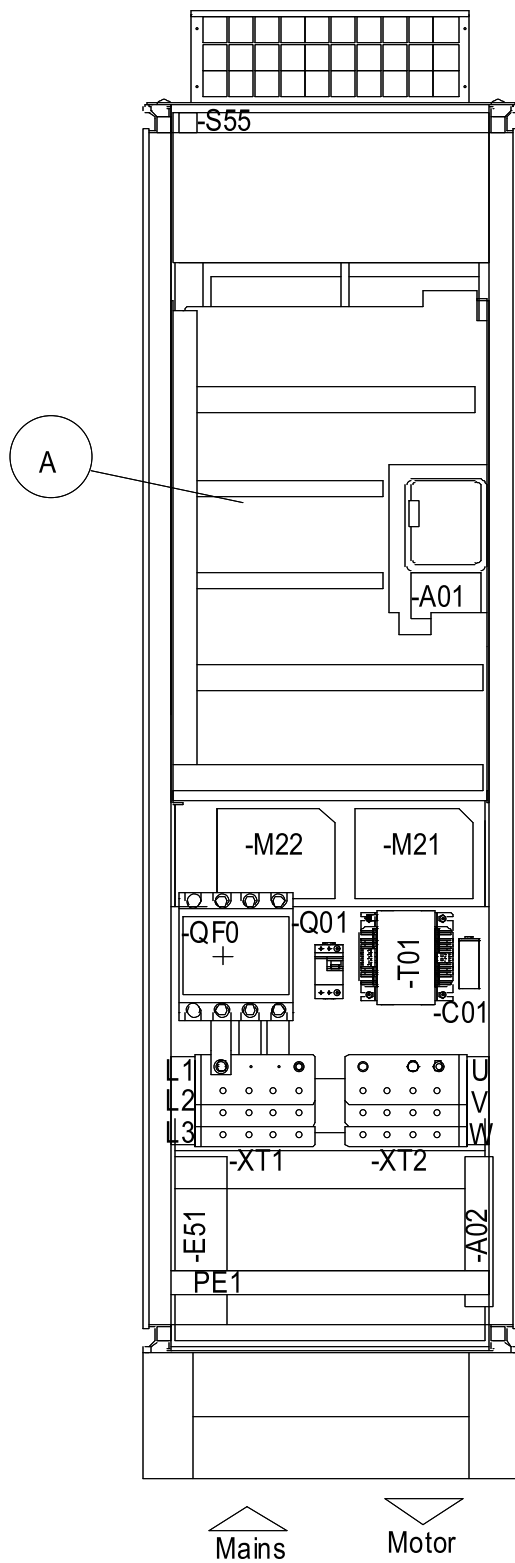

This drawing is property of Schneider Electric Power Drives GmbH

Detail A

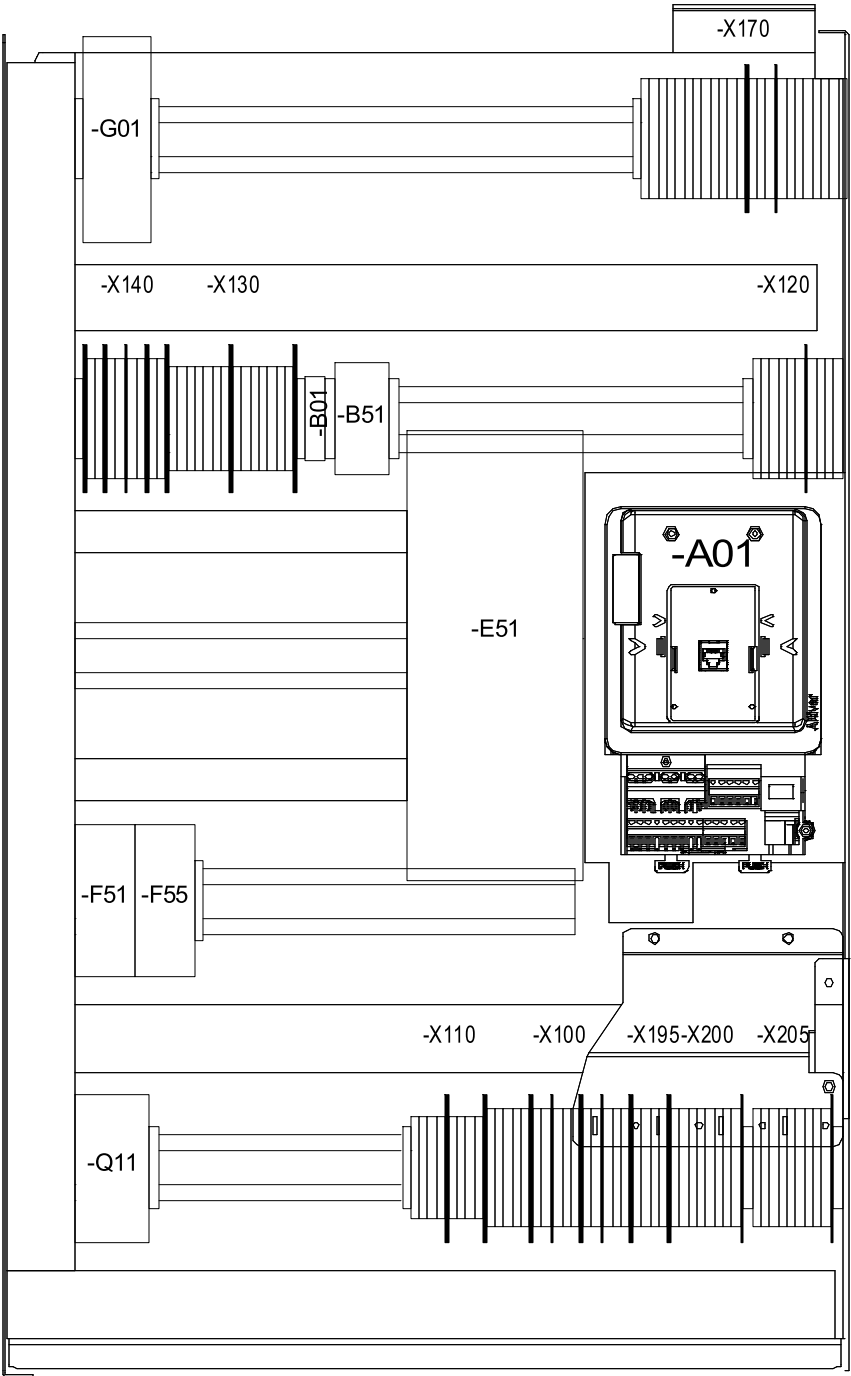

Date	17.08.2026
Design	Gill
Checked	Stojkov



ATV680C13Q4X1
SE d.o.o. (Croatia)
Nabla Plus-Sintaksa


=

+ O2

8AP5126.00/00

This drawing is property of Schneider Electric Power Drives GmbH

Bottom View

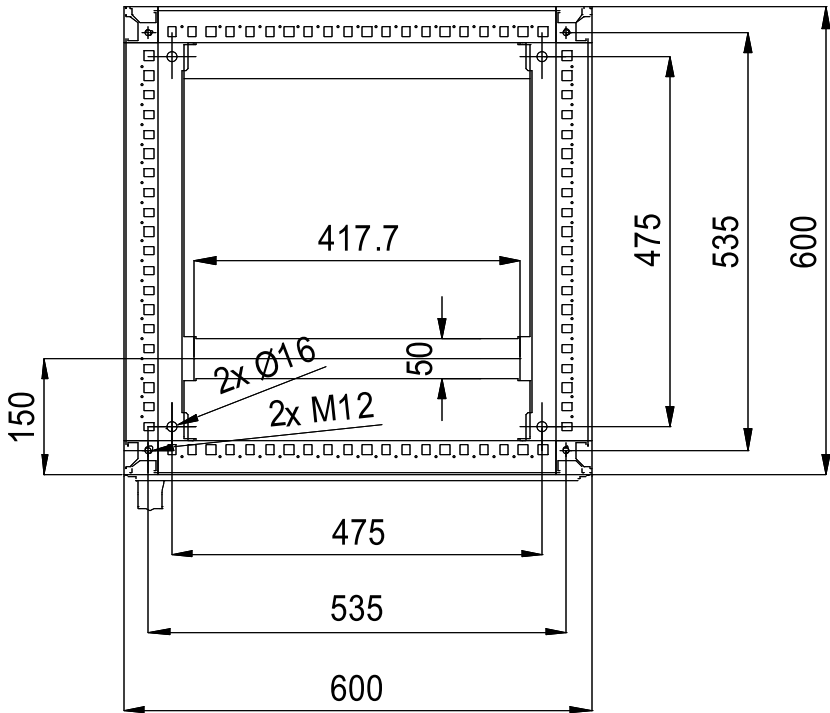

Date	17.08.2026
Design	Gill
Checked	Stojkov



ATV680C13Q4X1
SE d.o.o. (Croatia)
Nabla Plus-Sintaksa

=

+ 01

This drawing is property of Schneider Electric Power Drives GmbH

Plinth view

