




Star 1000

Model 1550

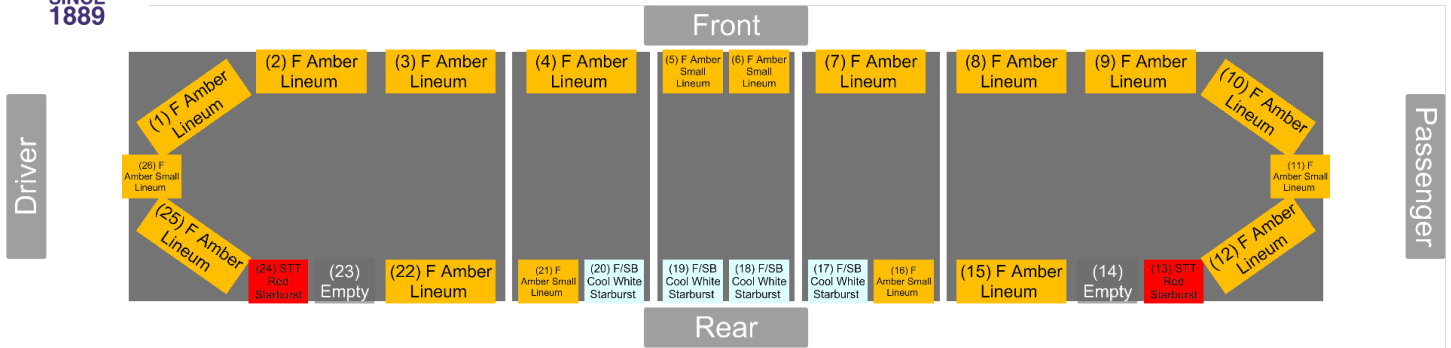


Position	Light Head Type and Style	Amperage
01	Amber Lineum	0.550
02	Amber Lineum	0.550
03	Amber Lineum	0.550
04	Amber Lineum	0.550
05	Amber Small Lineum	0.550
06	Amber Small Lineum	0.550
07	Amber Lineum	0.550
08	Amber Lineum	0.550
09	Amber Lineum	0.550
10	Amber Lineum	0.550
11	Amber Small Lineum	0.550
12	Amber Lineum	0.550
13	Red Starburst	0.550
14	--	--
15	Amber Lineum	0.550
16	Amber Small Lineum	0.550
17	Cool White Starburst	0.550
18	Cool White Starburst	0.550
19	Cool White Starburst	0.550
20	Cool White Starburst	0.550
21	Amber Small Lineum	0.550
22	Amber Lineum	0.550
23	--	--
24	Red Starburst	0.550
25	Amber Lineum	0.550
26	Amber Small Lineum	0.550

Customer	Order Number / PO	Order Date Jun 23, 2015
Order Notes		


Model 1550

Production Copy - Bill of Materials

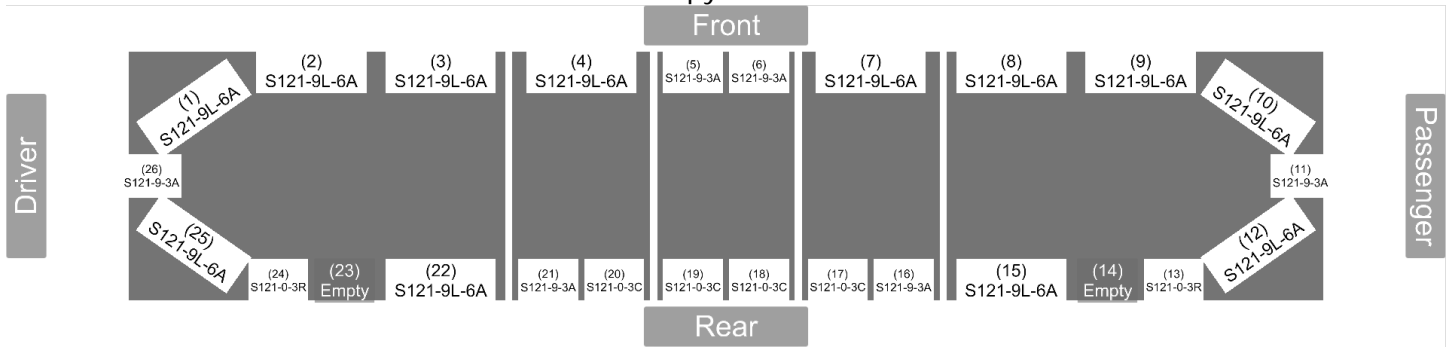


Quantity	Component	Description
12	S121-9L-6A	Amber Lineum
6	S121-9-3A	Amber Small Lineum
2	S121-0-3R	Red Starburst
4	S121-0-3C	Cool White Starburst

Wiring Diagram

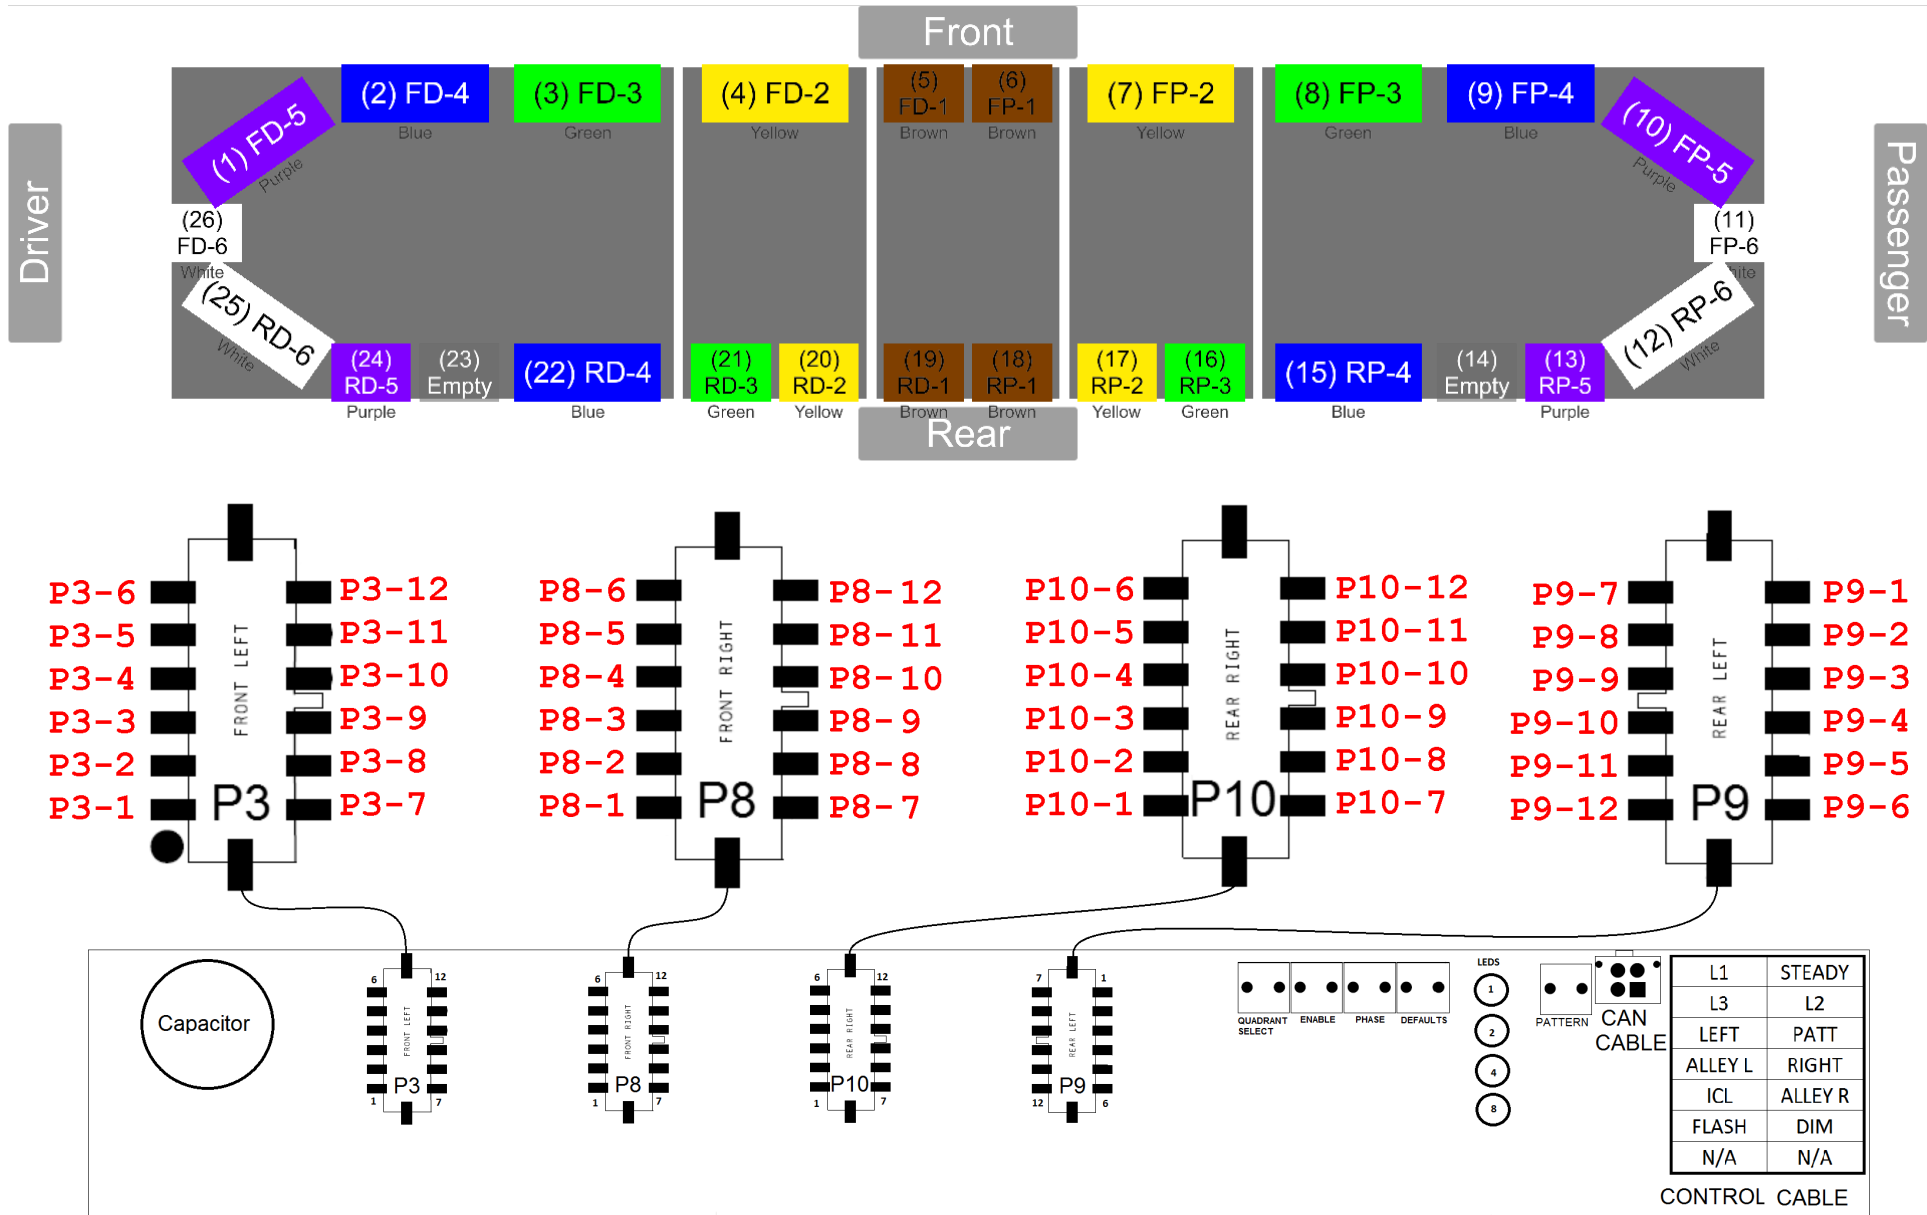

Bar Programming

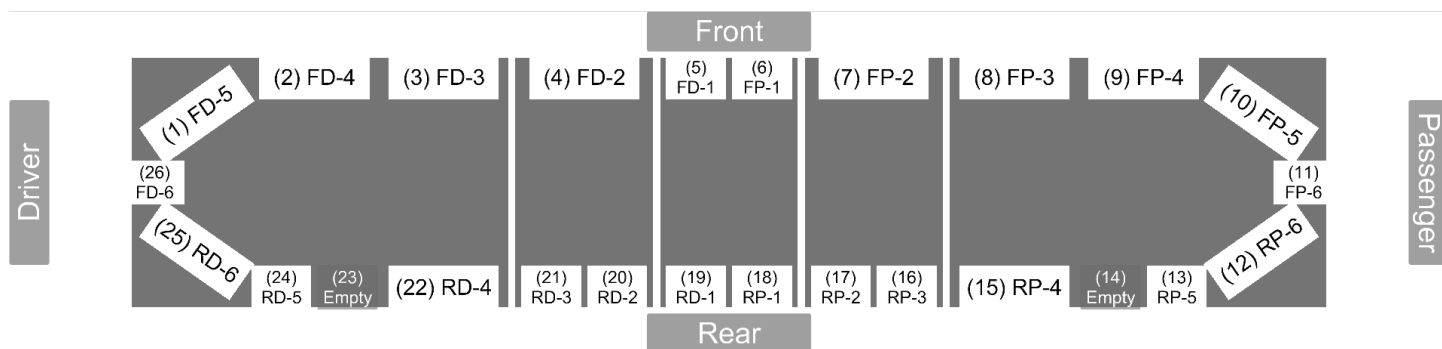

Input Map

Level 1
Level 2
Brake Lights
ICL
Turn Left
Left Alley

Takedown / Work Lights
Flashing Alley & Pursuit
Pattern
Dimmer
Turn Right
Right Alley

Default
Program
2

Default
Program
2

Function Definitions

Function	Positions		Pattern(s)
	Phase A	Phase B	
Takedown / Work Lights	RP-1, RD-1		Steady Burn
Level 1	RP-2 thru -4, RP-6	RD-2 thru -4, RD-6	Slow Triple
Level 2	FP-1 thru -6, RP-2 thru -4, RP-6	FD-1 thru -6, RD-2 thru -4, RD-6	Quadruple w/ Post Pop
Left Alley	FD-6		Steady Burn
Right Alley	FP-6		Steady Burn
ICL	FP-5	FD-5	Flicker
Dimmer	FD-1 thru -6, FP-1 thru -6, RP-1 thru -6, RD-1 thru -6		Steady Burn
Flashing Pursuit	RP-1, RD-1		Fast Triple
Flashing Alley	FP-6	FD-6	Flicker
Turn Left	RD-5		Steady Burn
Turn Right	RP-5		Steady Burn
Brake Lights	RP-5, RD-5		Steady Burn