




Star 1000

Model 1550

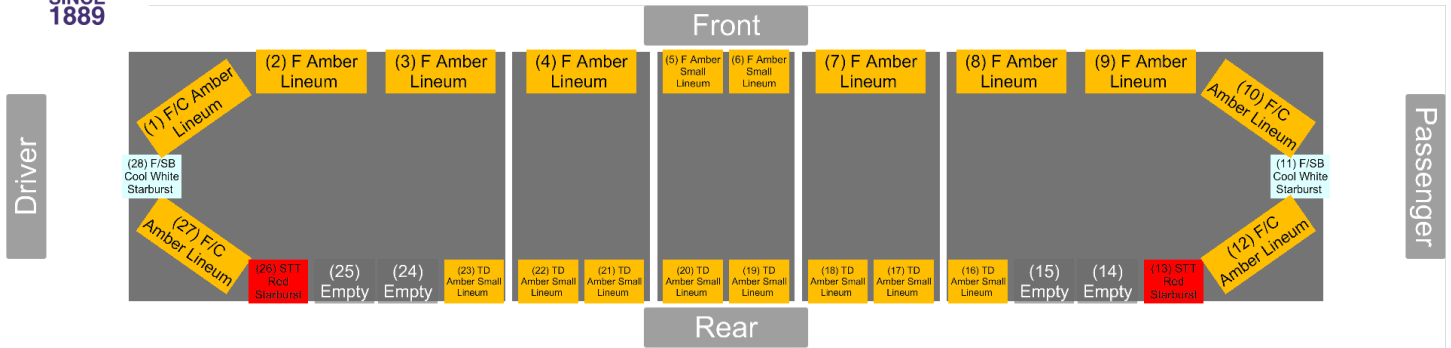


Position	Light Head Type and Style	Amperage
01	Amber Lineum	0.550
02	Amber Lineum	0.550
03	Amber Lineum	0.550
04	Amber Lineum	0.550
05	Amber Small Lineum	0.550
06	Amber Small Lineum	0.550
07	Amber Lineum	0.550
08	Amber Lineum	0.550
09	Amber Lineum	0.550
10	Amber Lineum	0.550
11	Cool White Starburst	0.550
12	Amber Lineum	0.550
13	Red Starburst	0.550
14	--	--
15	--	--
16	Amber Small Lineum	0.550
17	Amber Small Lineum	0.550
18	Amber Small Lineum	0.550
19	Amber Small Lineum	0.550
20	Amber Small Lineum	0.550
21	Amber Small Lineum	0.550
22	Amber Small Lineum	0.550
23	Amber Small Lineum	0.550
24	--	--
25	--	--
26	Red Starburst	0.550
27	Amber Lineum	0.550
28	Cool White Starburst	0.550

Customer	Order Number / PO	Order Date Jun 23, 2015
Order Notes		


Model 1550

Production Copy - Bill of Materials

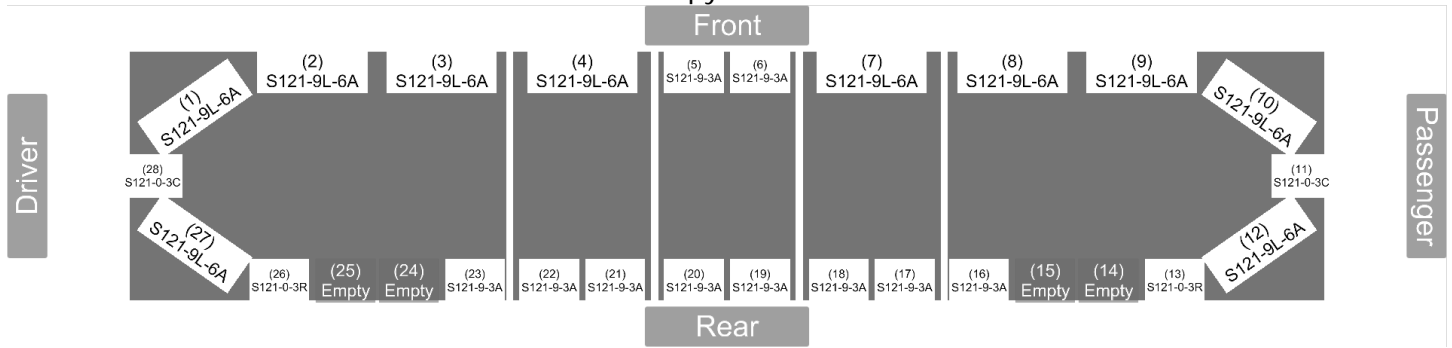


Quantity	Component	Description
10	S121-9L-6A	Amber Lineum
10	S121-9-3A	Amber Small Lineum
2	S121-0-3C	Cool White Starburst
2	S121-0-3R	Red Starburst

Wiring Diagram

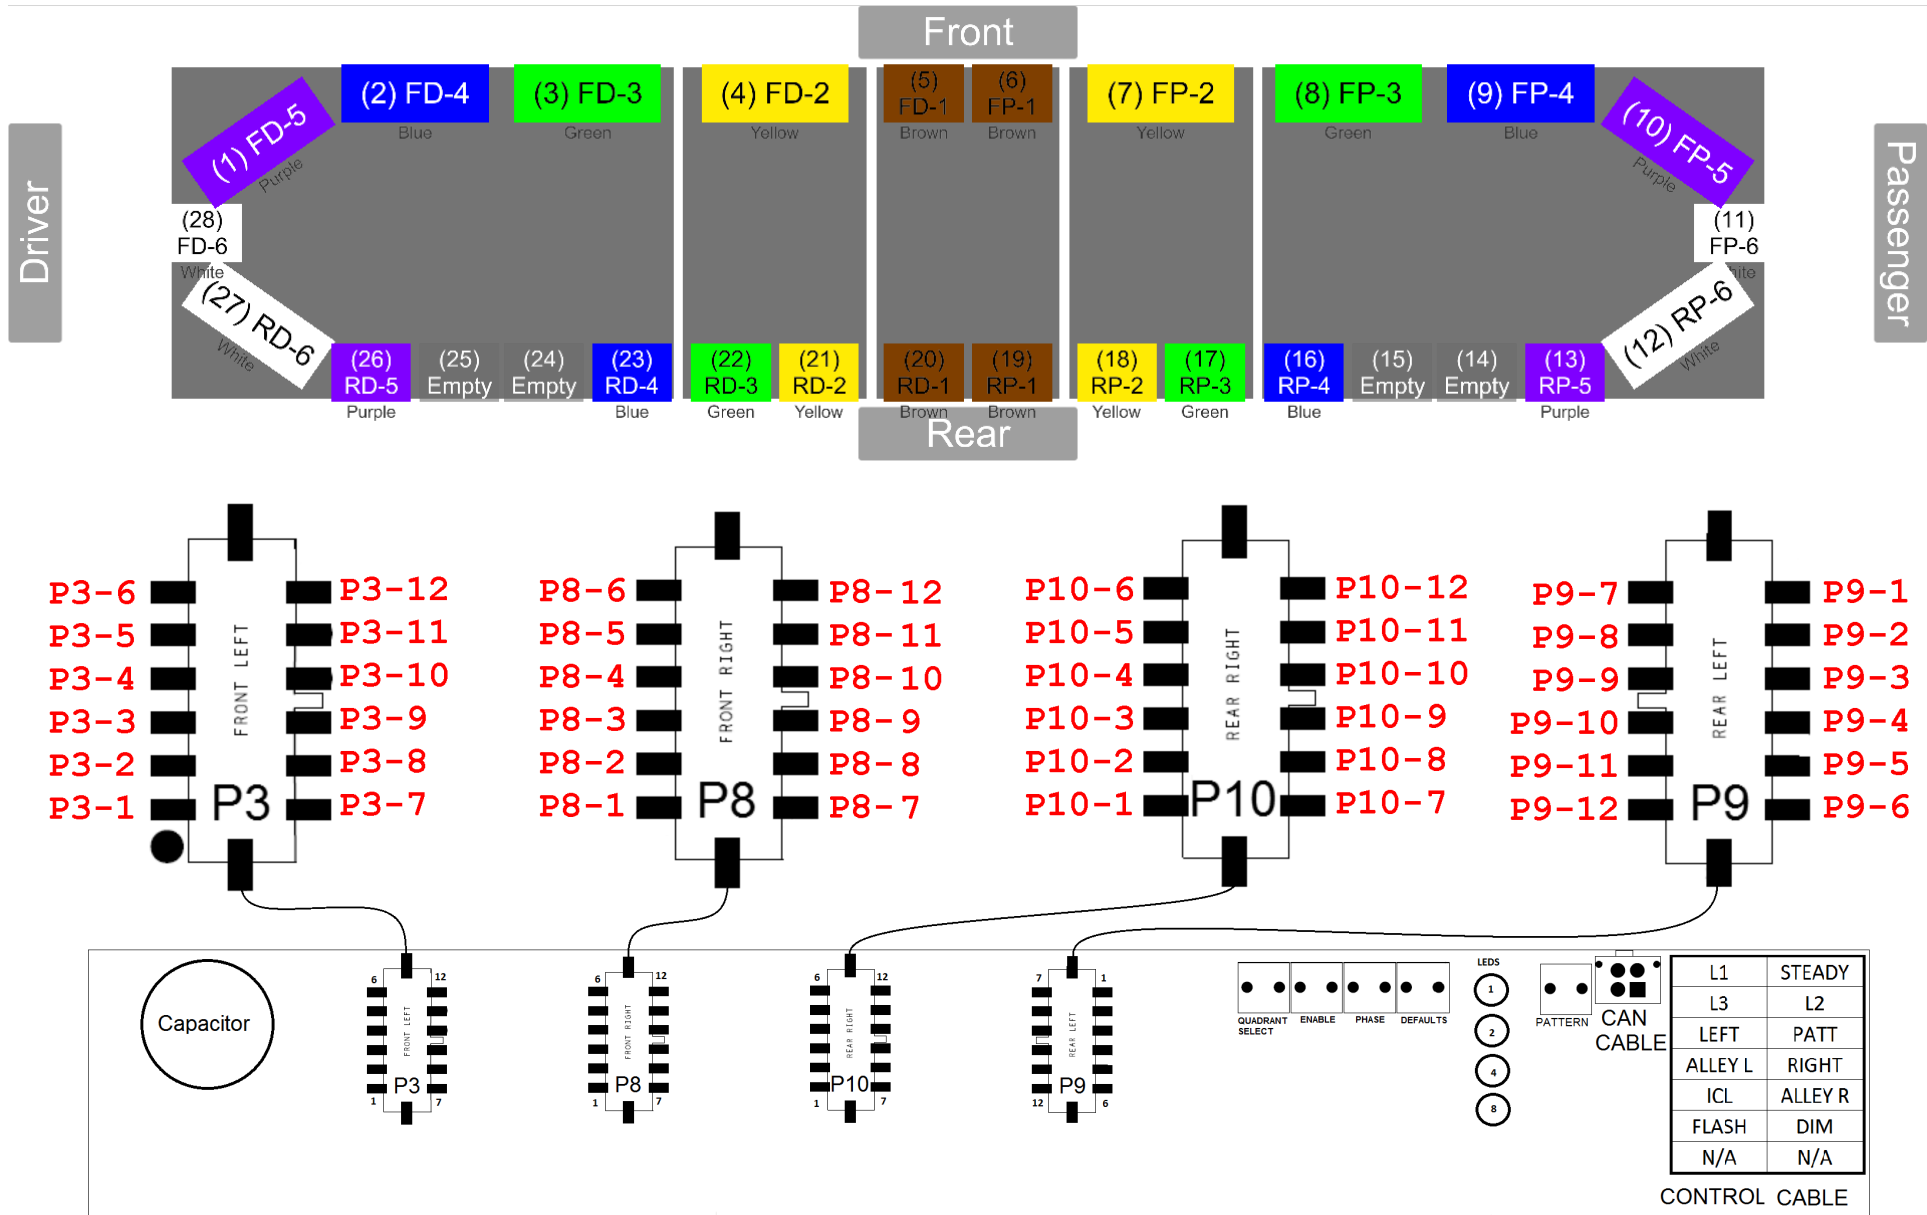

Bar Programming

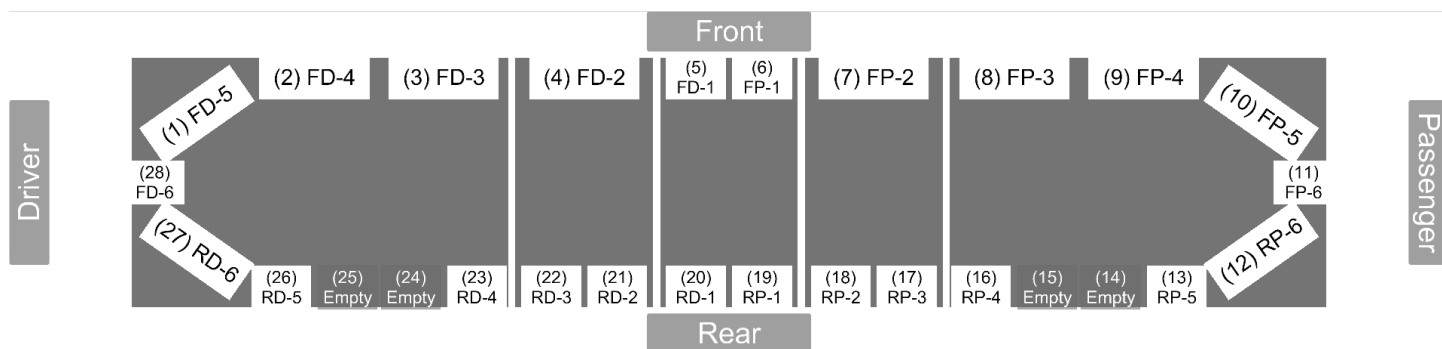

Input Map

Takedown / Work Lights
Level 1
Level 2
Level 3
Direct Left
Direct Right
Left Alley
Right Alley
ICL
Dimmer
Flashing Pursuit
Flashing Alley

Cruise
Turn Left
Turn Right
Brake Lights
California T13 Steady
Level 4
Level 5
Emitter
POWER
GROUND

Default
Program
5

Default
Program
5

Function Definitions

Function Break Out Box	Positions		Pattern(s)
	Phase A	Phase B	
Takedown / Work Lights			Steady Burn
Level 1	RP-1 thru -6	RD-1 thru -6	Slow Triple
Level 2	FP-1 thru -6, RP-5 thru -6	FD-1 thru -6, RD-5 thru -6	Quadruple w/ Post Pop
Level 3	FP-1 thru -6, RP-5 thru -6	FD-1 thru -6, RD-5 thru -6	Random 2
Direct Left	RP-1 thru -4, RD-1 thru -4		Snake
Direct Right	RP-1 thru -4, RD-1 thru -4		Snake
Left Alley			Steady Burn
Right Alley			Steady Burn
ICL			
Dimmer	FD-1 thru -6, FP-1 thru -6, RP-1 thru -6, RD-1 thru -6		Steady Burn
Flashing Pursuit			
Flashing Alley			
Cruise	FD-5, FP-5, RP-6, RD-6		Steady Burn
Turn Left	RD-5		Steady Burn
Turn Right	RP-5		Steady Burn
Brake Lights	RP-5, RD-5		Steady Burn
California T13 Steady	FD-4		Steady Burn
Level 4	FP-1 thru -6, RP-1 thru -4, RP-6	FD-1 thru -6, RD-1 thru -4, RD-6	Full Bounce
Level 5	FP-1 thru -6, RP-1 thru -4, RP-6	FD-1 thru -6, RD-1 thru -4, RD-6	Slow Triple, Fast Double, Slow Single, Full Bounce
Emitter	FD-1 thru -2		Steady Burn