UML
Bergstrom

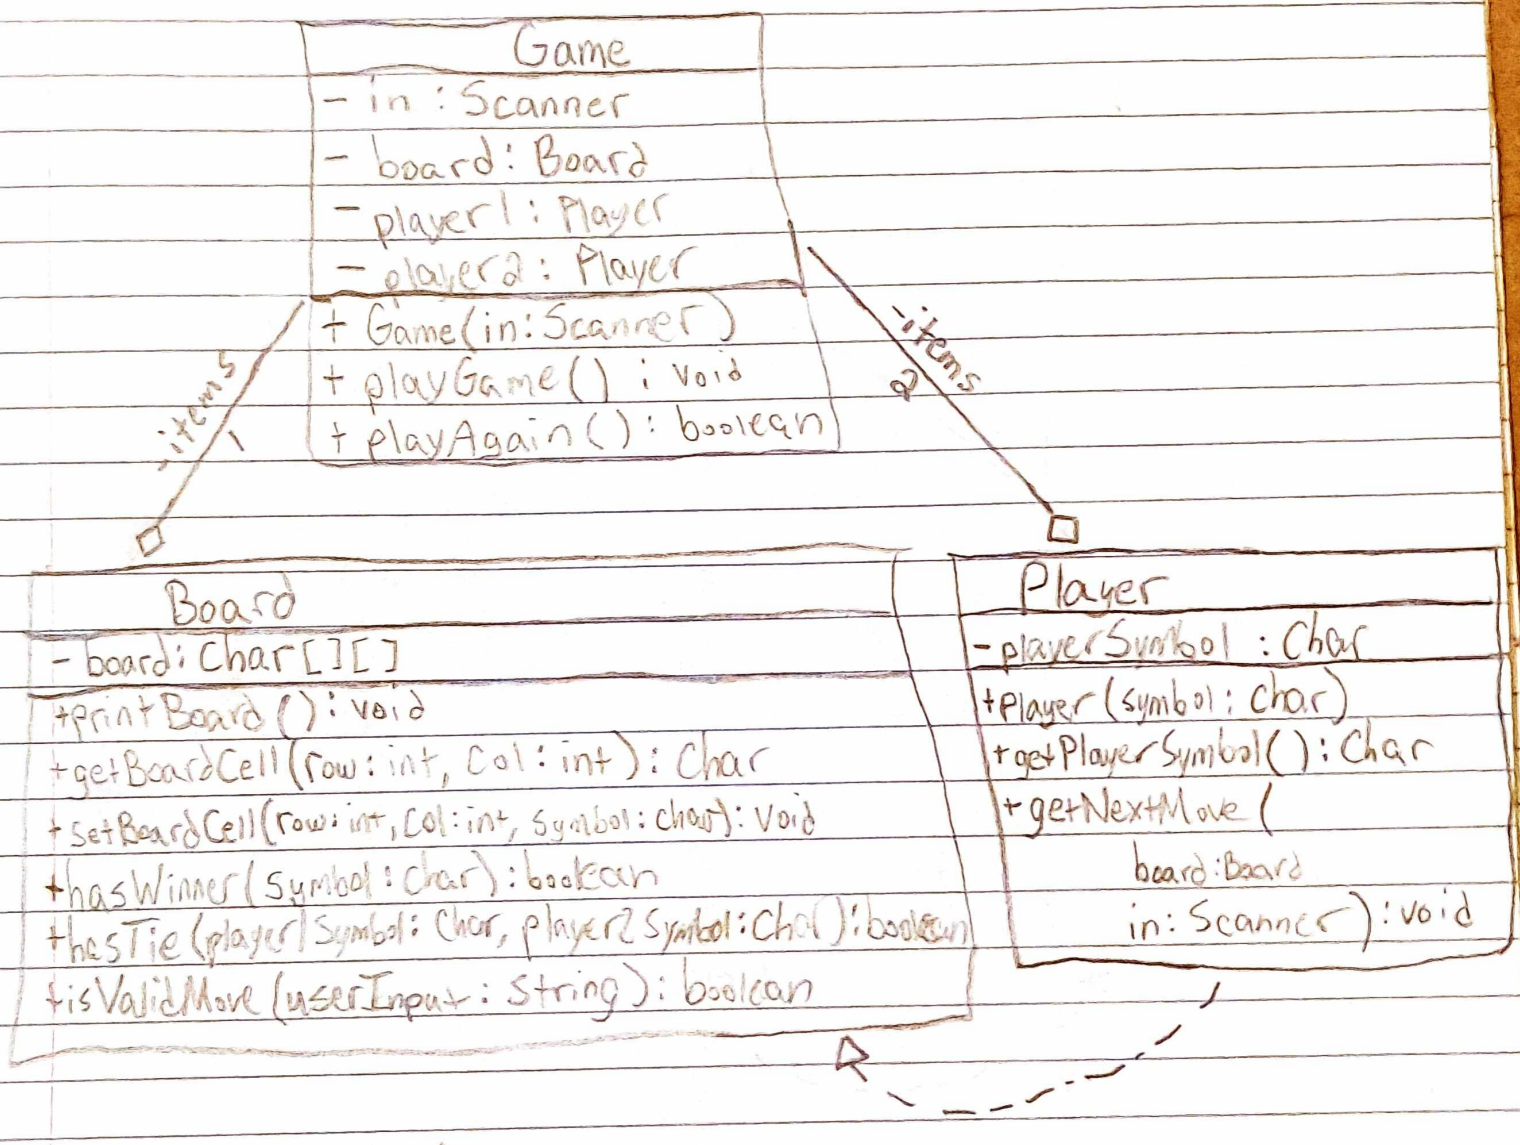

hasTie() takes any Char, so I don't think it is dependant on Player.