


### **Special Porpoise Fuzz Tremolo**

Revised 4/14/24

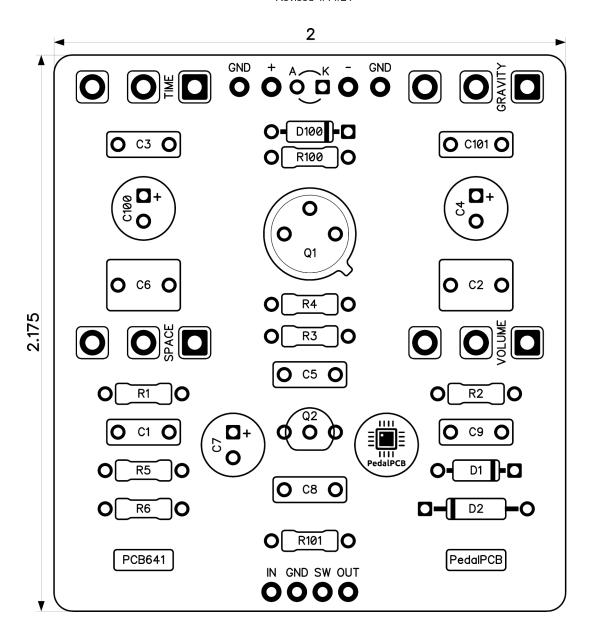

### **CONTROLS AND FEATURES**

- Gravity
- Time
- Volume
- Space

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.




Parts List (Page 1 of 1)

LOCATION	VALUE	TYPE	NOTES
R1	1M	Resistor, 1/4W	
R2	4K7	Resistor, 1/4W	
R3	68K	Resistor, 1/4W	
R4	33K	Resistor, 1/4W	
R5	750K	Resistor, 1/4W	
R6	47K	Resistor, 1/4W	
R100	100R	Resistor, 1/4W	
R101	4K7	Resistor, 1/4W	* LED current limiting resistor
		rtosistor, mini	
C1	220p	Ceramic capacitor	
C2	220n	Film capacitor, 7.2 x 5.0mm	
C3	4n7	Film capacitor, 7.2 x 2.5mm	
C4	10u	Electrolytic capacitor, 5mm	
C5	47p	Ceramic capacitor	
C6	1n	Film capacitor, 7.2 x 2.5mm	
C7	22u	Electrolytic capacitor, 5mm	
C8	330p	Ceramic capacitor	
C9	47n	Film capacitor, 7.2 x 2.5mm	
C100	100u	Electrolytic capacitor, 5mm	
C100	100u	Film capacitor, 7.2 x 2.5mm	
0101	10011	I IIII Capacitor, 7.2 x 2.5mm	
D1	1N914	Signal diode, DO-35	
D2	GE	Germanium diode	
D100	1N5817	Schottky diode, DO-41	
D 100	1113017	Ochotiky Glode, BO-41	
Q1	1T308A	Germanium transistor, PNP TO-5	
Q2	PN2222A	BJT transistor, NPN TO-92	
QZ	INZZZZA	DOT (TATISISTO), 141 14 10-32	
GRAVITY	B2K	16mm right-angle PCB mount pot	
TIME	C500K	16mm right-angle PCB mount pot	
VOLUME	A100K	16mm right-angle PCB mount pot	
SPACE	B50K	16mm right-angle PCB mount pot	
OI /\OL	DOOR	Tomm right-arigie i OB mount pot	




# Special Porpoise Fuzz Tremolo Schematic Diagram

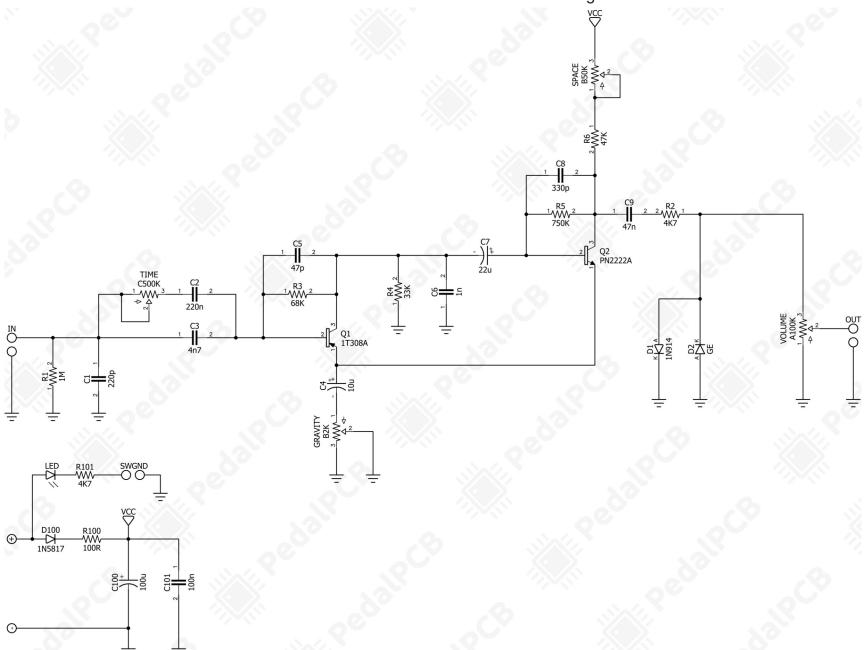



# PedalPCB Special Porpoise Fuzz Tremolo Wiring Diagram

Wiring Diagram

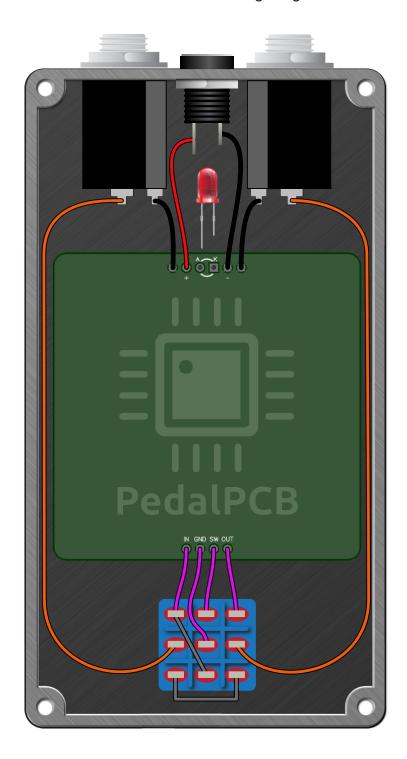



## PedalPCB Special Porpoise Fuzz Tremolo

**Drill Template** 125B Enclosure

