

CONTROLS AND FEATURES

- Level
- Drive

All trademarks and registered trademarks are the property of their respective owners. The company, product, and service names used in this web site are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.




Barrage Fuzz Parts List (Page 1 of 1)

LOCATION	VALUE	TYPE	NOTES
R1	10K	Resistor, 1/4W	
R2	200R	Resistor, 1/4W	
R3	22K	Resistor, 1/4W	
CLR	4K7	Resistor, 1/4W	* LED current limiting resistor
		,	
C1	22n	Film capacitor, 7.2 x 2.5mm	
C2	1n	Film capacitor, 7.2 x 2.5mm	
C1 C2 C3	100u	Electrolytic capacitor, 5mm	
C4	68n	Film capacitor, 7.2 x 2.5mm	
C100	100u	Electrolytic capacitor, 5mm	
D100	1N5817	Schottky diode, DO-41	
Q1	PF5102	JFET transistor, N-channel	
Q1 Q2	MPSA13	BJT transistor, NPN TO-92	
LEVEL	B100K	16mm right-angle PCB mount pot	
DRIVE	B250K	16mm right-angle PCB mount pot	




Barrage Fuzz Schematic Diagram

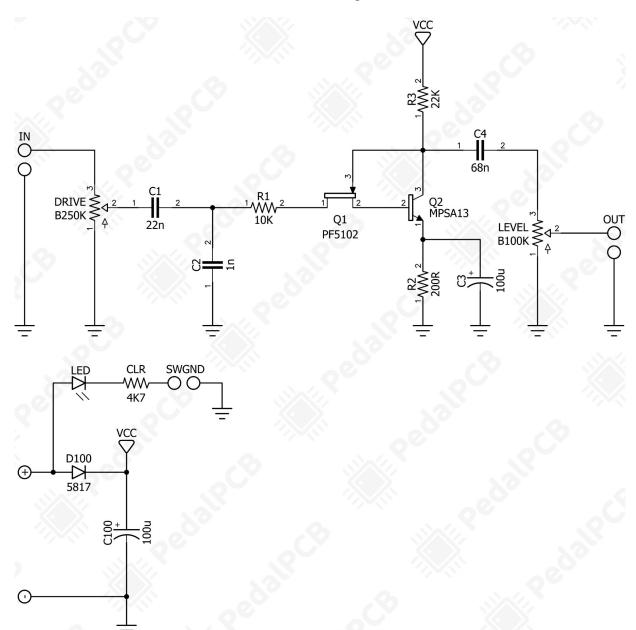



Barrage Fuzz Wiring Diagram

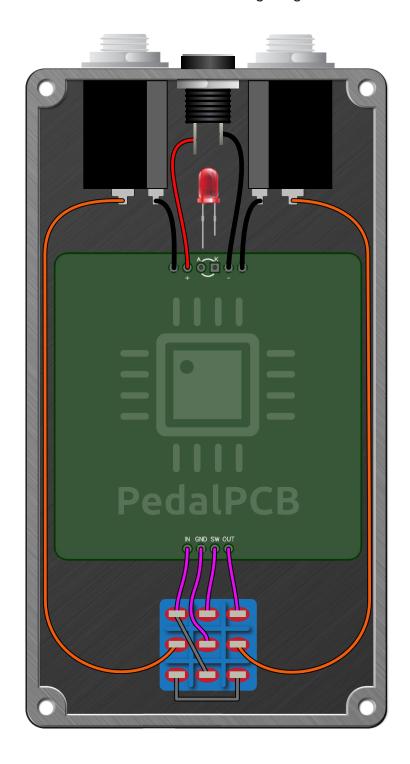



Barrage Fuzz Drill Template

125B Enclosure

