

## V440MC02-LF

PHASE NOISE (1 Hz BW, typical)

Rev A1

14118 Stowe Drive, Suite B Poway, CA 92064

TEL: (858) 621-2700 | FAX: (858) 486-1927

URL: www.zcomm.com

EMAIL: applications@zcomm.com


## Voltage-Controlled Oscillator Surface Mount Module

## **Applications**

- VHF Radios
- · Test Instrumentation
- Mobile Radios

## **Application Notes**

- AN-101: Mounting and Grounding
- AN-102: Output Loading
- AN-107: Manual Soldering

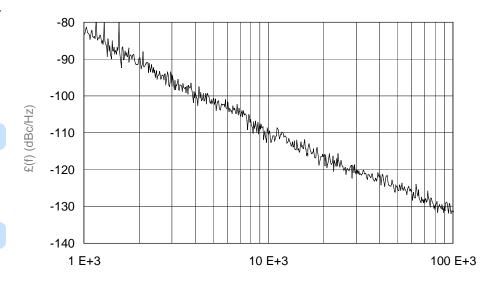

OFFSET (Hz)


Performance Specifications	Min	Тур	Max	Units
Oscillation Frequency Range	370		460	MHz
Phase Noise @ 10 kHz offset (1 Hz BW)		-107		dBc/Hz
Harmonic Suppression (2nd)		-8	-6	dBc
Tuning Voltage	0.5		4.5	Vdc
Tuning Sensitivity (avg.)		39		MHz/V
Power Output	4	7.5	11	dBm
Load Impedance		50		$\Omega$
Input Capacitance			250	pF
Pushing			1	MHz/V
Pulling (12 dB Return Loss, Any Phase)			1	MHz
Operating Temperature Range	-40		85	°C
Package Style		MINI-14S		
Power Supply Requirements	Min	Тур	Max	Units
Supply Voltage (Vcc. nom.)		5		Vdc

Power Supply Requirements	Min	Тур	Max	Units
Supply Voltage (Vcc, nom.)		5		Vdc
Supply Current (Icc)		15	18	mA

#### **Additional Notes**


Rev A1


## Tuning Curve, typ.

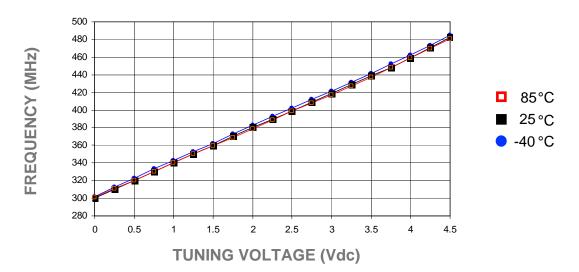


## Power Curve, typ.

# **Footprint**

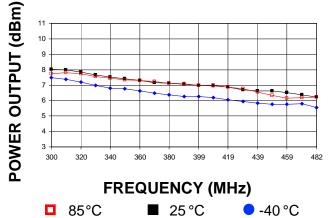

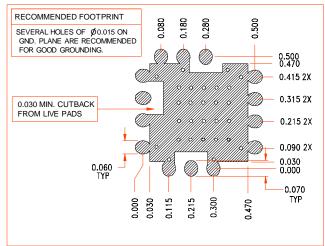

## **Physical Dimensions**

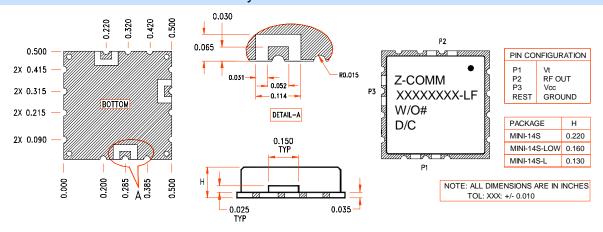

LFSuffix = RoHS Compliant. All specifications are subject to change without notice.