

# MX-1200 Importing Custom Graphics



Universal Remote Control Tech Bulletin #22

**Models Affected:** MX-1200


**Serial Numbers Affected:** NA

**Firmware Version:** NA

**Software:** CCP: Complete Control Program

## Symptom

- Importing your own images/custom graphics for the MX-1200 in CCP seems impossible. CCP does not provide access to the windows folder structure, which allows you to use your own images.

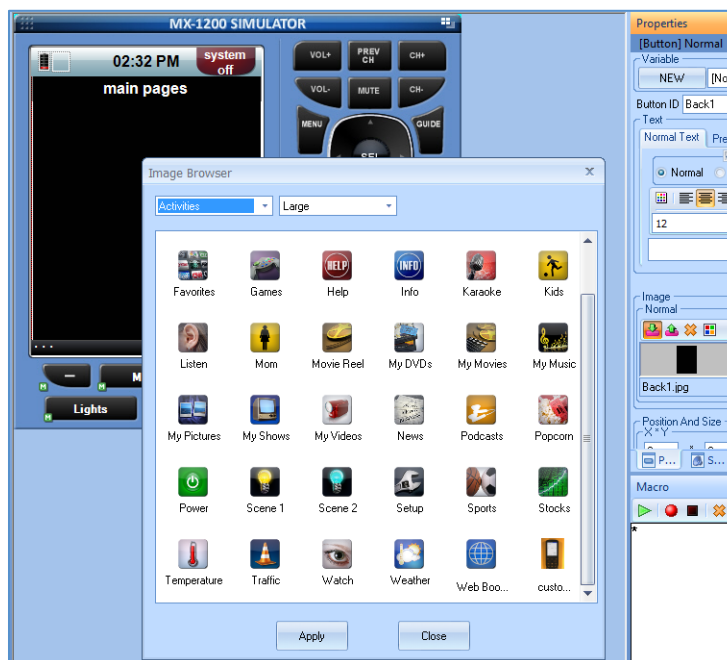

## Solution

---

Well, you CAN import your custom images into CCP by adding an image(s) to one of CCP's image folder.

1. Make sure the new image is **no larger than 240 x 320 pixels** (for background images). It will NOT BE POSSIBLE to resize your image once it is imported, so be sure it is the right size.

*Use the example below to judge the size of the buttons you will create;  
using the full resolution of 240x320 to fill the entire screen.*


2. Navigate to the following folder location: [C:\Program Files \(x86\)\Universal Remote Control, Inc\Complete Control Program\MX-1200\Images](C:\Program Files (x86)\Universal Remote Control, Inc\Complete Control Program\MX-1200\Images). (This is the default location where graphic files are saved.)
3. Choose the **main** folder where you would like to categorize the new image; Activities, Blanks, Brands, Buttons & Backgrounds, Devices, Favorite Channel Icons, or Rooms.
4. Select a "button size" **subfolder** where you would like to save the image; **Large** or **Small**.

# MX-1200 Importing Custom Graphics




Universal Remote Control Tech Bulletin #22

5. **Save** the image in the appropriate folder containing a .vfd file. (All URC graphics folders for the MX-1200 contain a .vfd file that stores the default URC images in a compressed form. Adding YOUR graphic to the same folder will allow it to be seen by CCP.)

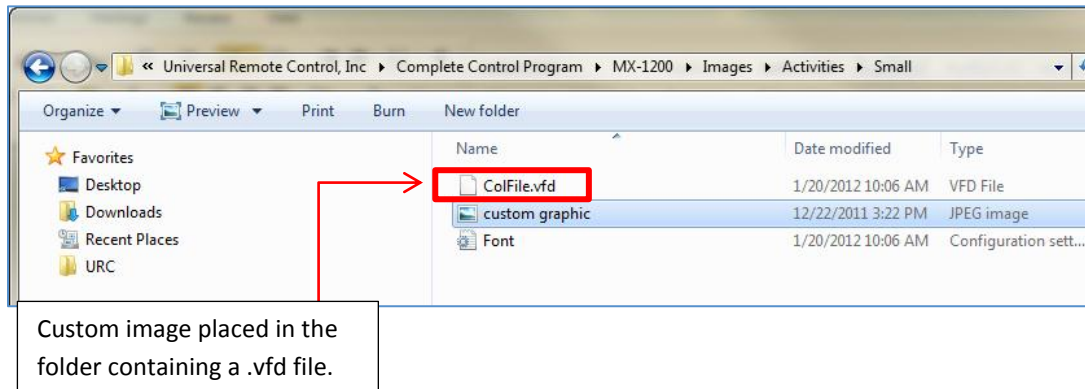

6. Return to the **MX-1200 CCP Image Gallery** and select an onscreen button.
7. Click the Properties window to view the **Image Normal/Pressed** area and select the **Import** button.
8. The **Image Browser** opens. Select the **drop-down boxes** and navigate to the location where you saved the image.
9. **Click and drag** the custom image to the MX-1200 screen.
10. **Save** your file.

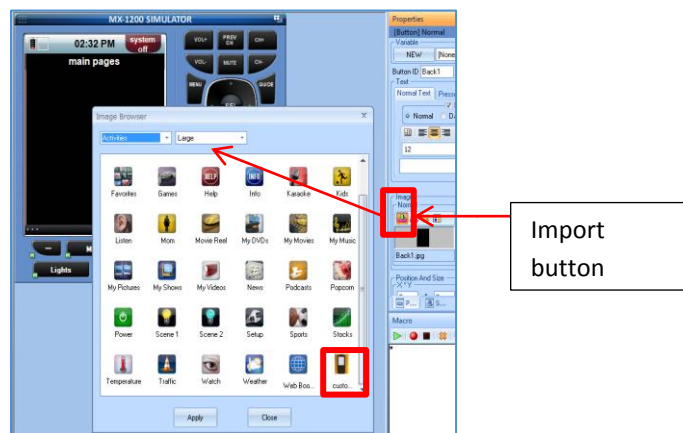

*I selected Activities/Large and my custom graphic was included.*

**IMPORTANT:** Be sure to leave a copy of the original custom graphics for the customer, as a future upload from the remote **WILL NOT** retain the images.