PP 1: Display Stock/Requirements List

Exercise Use the SAP Fiori Launchpad to display the Stock/Requirements List. **Time** 5 min

Task Review the material status of your Deluxe Touring bike (finished good) in the Dallas plant using the Stock/Requirements list.

Name (Position) Lars Iseler (Shop Floor Worker 2)

The Stock/Requirements list contains up-to-date information on the current status of inventory on hand, requirements, and receipts. It is a dynamic list that allows you to view changes made to material status.

Stock/Requirements List


To review the material status, in the space *Production Planning and Execution* space and the role of *Shop Floor Worker*, use the app *Monitor Stock / Requirements List*.

Start



Firstly, you need to find the material number(s) for your Deluxe Touring bikes. For this, click the *Material* field and press **F4** (or click on the search icon next to the field). This will open the *Material Number (1)* search screen.

F4

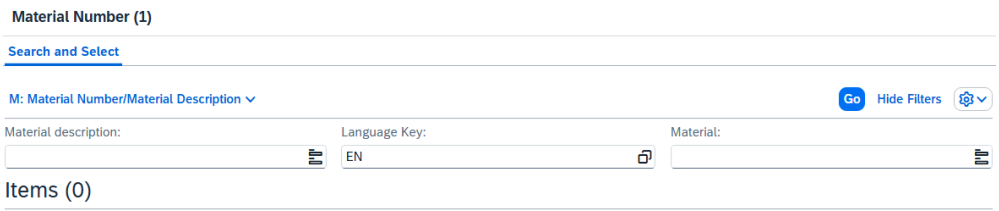

Go to the T: *Material by Material Type* tab. Use the icon to display a list of all search tabs available.

Material by Material Type


In the *Material Type* field, select **Finished Product** (**FERT**). In order to display your Deluxe Touring bikes only, you need to define two more search criteria. First, in the *Material Description* field type **Deluxe Touring***.

Finished Product

Deluxe Touring*

Second, in the *Material* field (which is the field for the unique material number) type ***###**. Remember to replace ### with your three-digit number, e.g., *014 if your number is 014. *###

Compare your entries with the screen below before pressing Enter or clicking on Go to start the search.

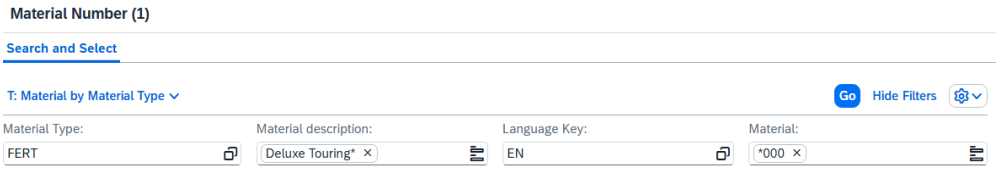


The result of this search should give you a list of all:

a) finished goods,


b) names (with a short description) that start with Deluxe Touring,

c) material numbers that end with your number (###).

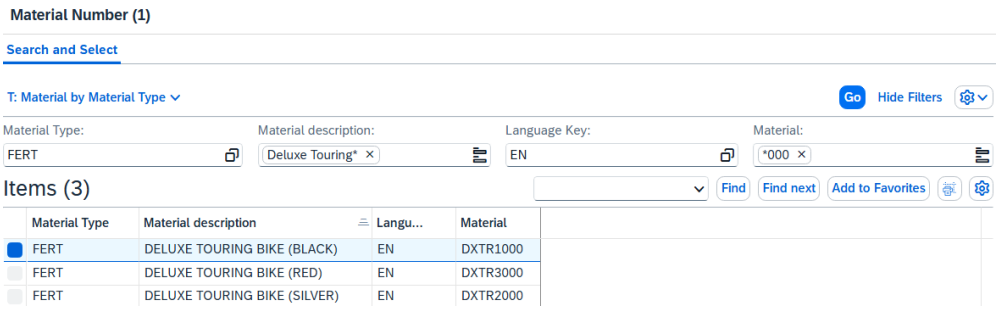


You should get a list of three different Deluxe Touring bikes – black, red and silver (please note that the material numbers in your screen will be different). Double-click on your black Touring bike which will copy its unique material number (**DXTR1###**) into the *Material* field. DXTR1###

In addition to the material number, in the *Plant* field select Global Bike's manufacturing facility in Dallas (**DL00**). DL00

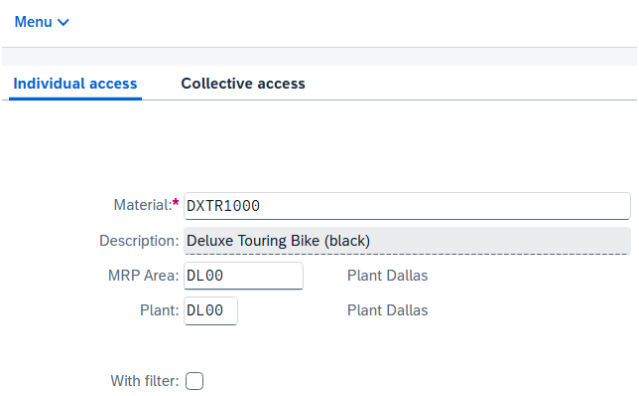

Then, click on Continue. You should be displayed a screen similar to the one shown below.

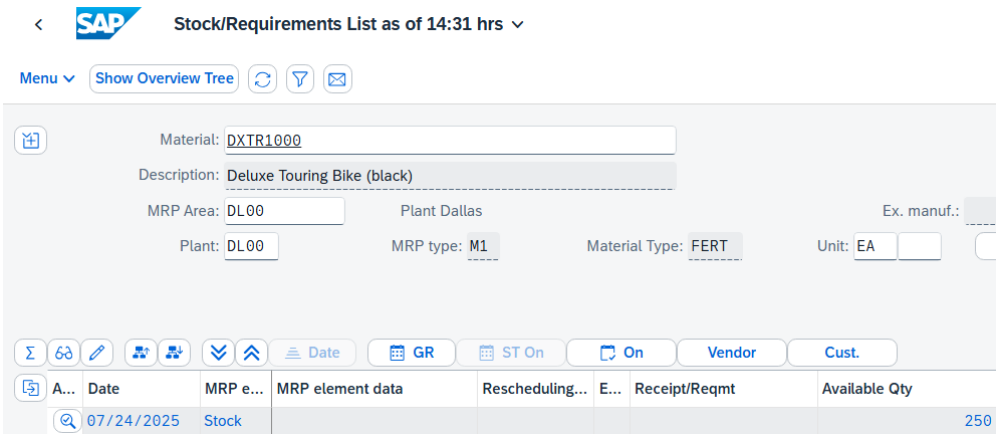

As you can see, Global Bike has currently 250 black Deluxe Touring bikes on stock. Repeat the same procedure for the other two deluxe bikes (red and silver).

Note You might see a different amount based on the case studies you did before.

How many red Deluxe Touring Bikes are available in Dallas?

_____ pieces

How many silver Deluxe Touring Bikes are stored in the DL00 plant?

_____ pieces

Click SAP to return to the SAP Fiori Launchpad.

PP 2: Display Bill of Material

Exercise Use the SAP Fiori Launchpad to display a bill of material. **Time** 10 min

Task Review the components of your black Deluxe Touring bike and the components of the Touring Aluminum Wheel Assembly within the finished bike bill of material.


Name (Position) Jun Lee (Production Manager)

A bill of material (BOM) is a list of the components that are needed to create a given product. The list contains the description, the quantity, and unit of measure. The BOM can contain items of different item categories such as stock items, non-stock items, document items, and text items.

Bill of Material (BOM)

To review a bill of material, in the space *Production Planning and Execution* space and the role of *Production Manager*, use the app *Maintain Bill Of Material – Create, change & display*.

Start




Enter for *material* **DXTR1###** and **DL00** for the *plant* in **Dallas**.


DXTR1###
DL00

Select **Production** in the dropdown menu for **BOM Usage** as seen below.

Production

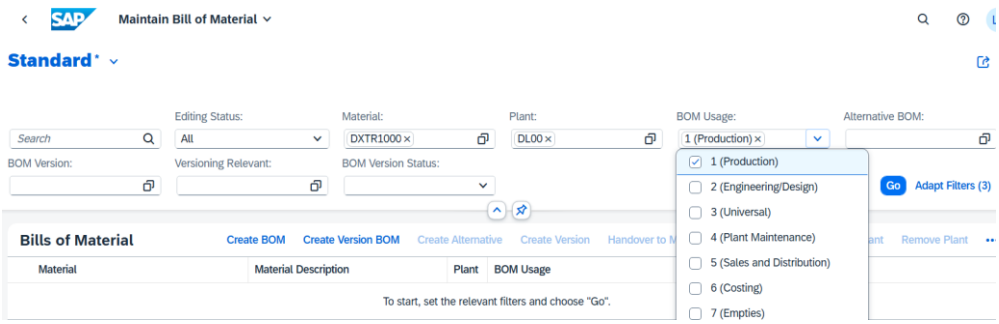

Press Enter or Go to run the search. You will be shown the parts list of your black Deluxe Touring Bike.

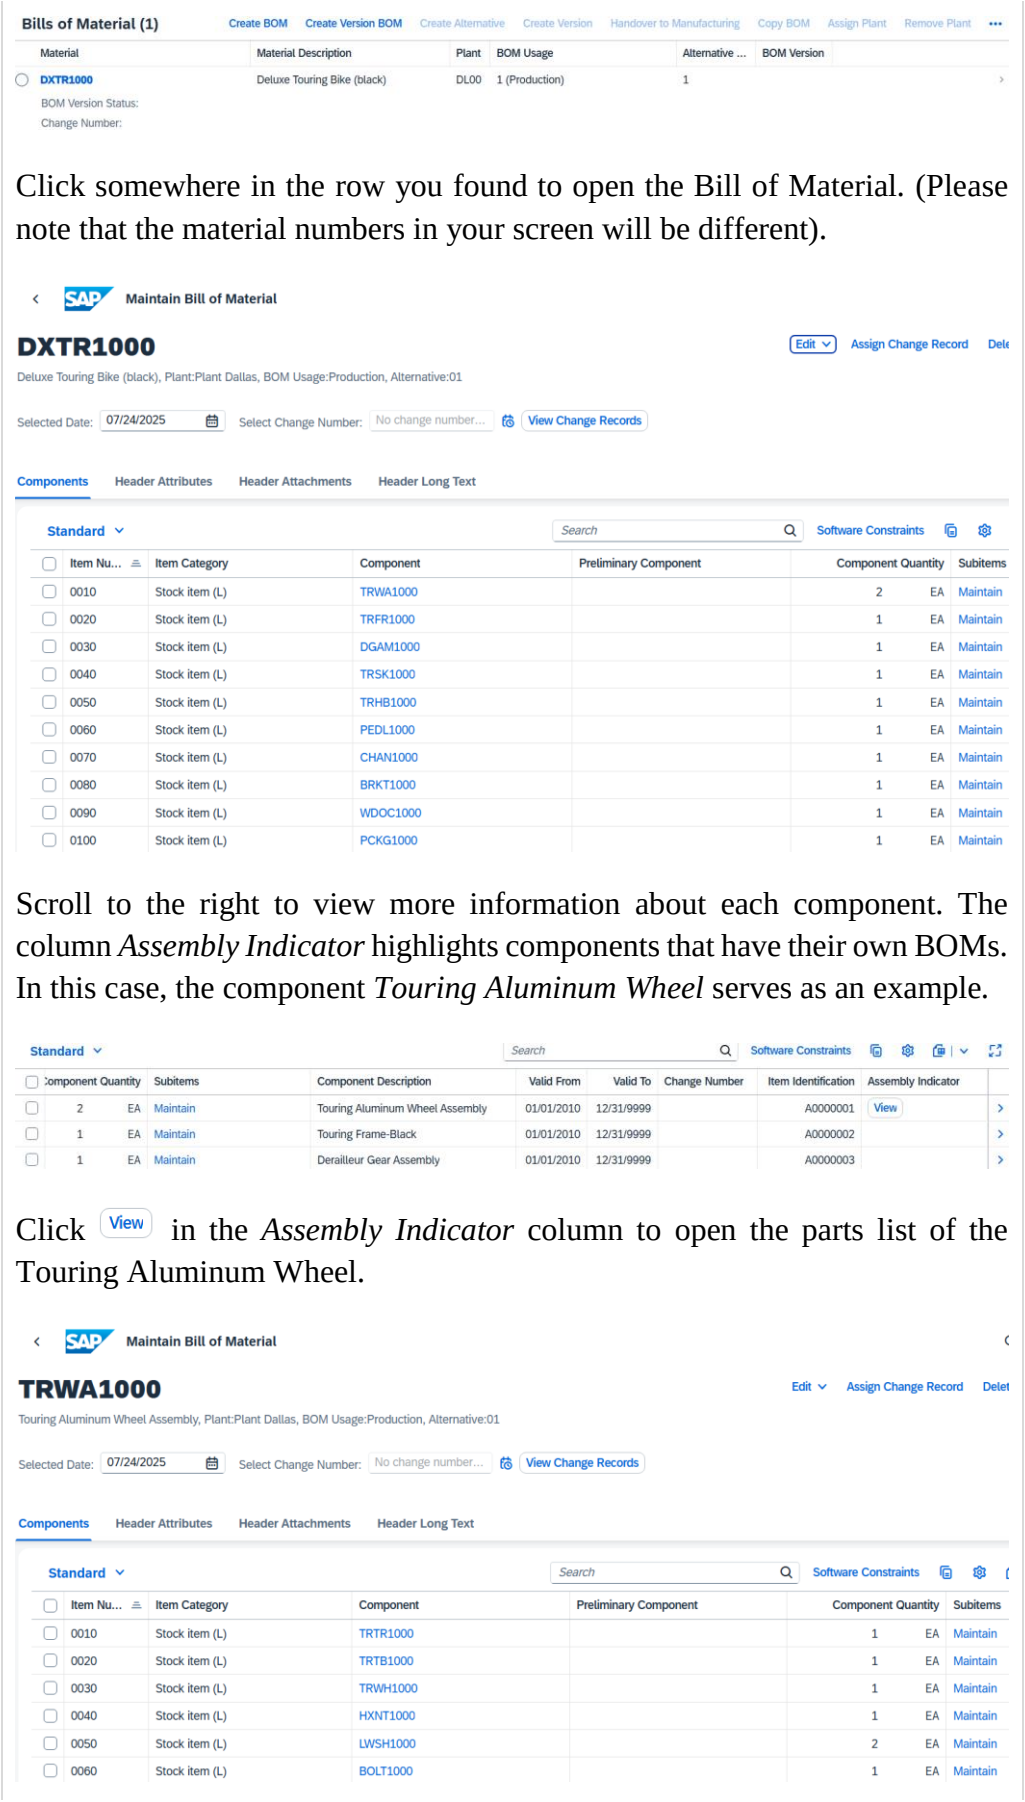

Click somewhere in the row you found to open the Bill of Material. (Please note that the material numbers in your screen will be different).

Scroll to the right to view more information about each component. The column *Assembly Indicator* highlights components that have their own BOMs. In this case, the component *Touring Aluminum Wheel* serves as an example.

Click View in the *Assembly Indicator* column to open the parts list of the Touring Aluminum Wheel.

Thus, this is a multi-level BOM, since components of the BOM contain their own BOM with components

Click once on the back button ‹ to navigate back to the Bill of Material of your material DXTR1###.

How many parts of the TRWA1## component are needed to manufacture the DXTR1##?

_____

Repeat the procedure for your red and the silver Deluxe Touring bike to identify the differences in their bills of materials. You can also use multiple windows or tabs of your browser to better compare the BOMs.

Click SAP to return to the SAP Fiori Launchpad.

PP 3: Display Multi-Level Bill of Materials

Exercise Use the SAP Fiori Launchpad to display a multi-level BOM. **Time** 5 min

Task Review the BOM for your black Deluxe Touring bike from a multi-level hierarchy level.

Name (Position) Jun Lee (Production Manager)


To display a multi-level BOM, in the space *Production Planning and Execution* space and the role of *Production Manager*, use the app *Multilevel BOM.*

Start




In the following window, enter **DXTR1###** as the *material* and **DL00** as the *plant*. Click on Start.

DXTR1###
DL00
PP01
1

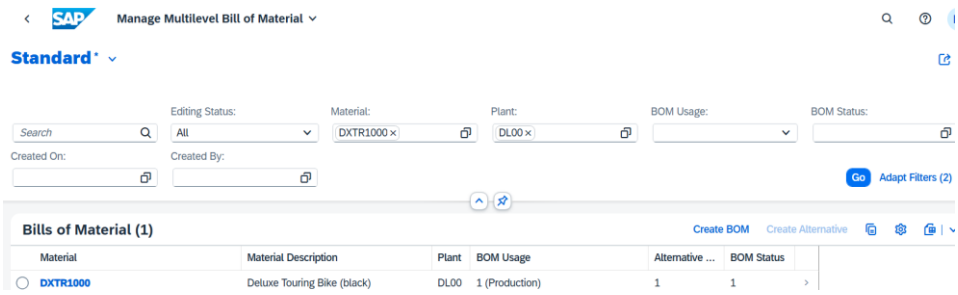

Click on ❯ to open the details.

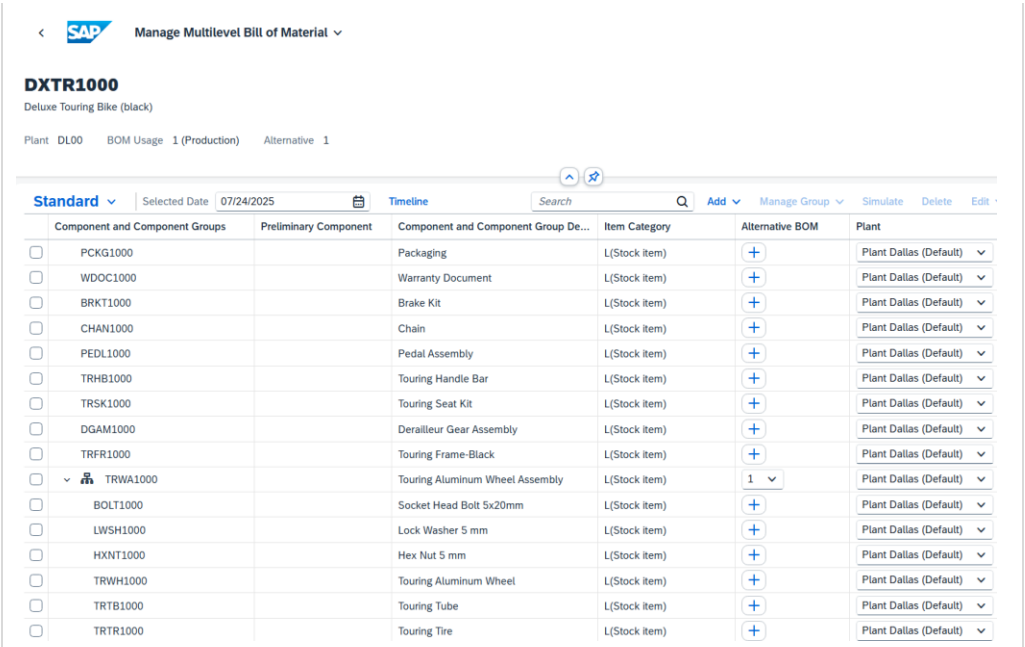

You will now see a summarized list of all the materials required for both the Deluxe Touring Bike (DXTR1###) and the Touring Aluminum Bike (TRWA1###). In contrast to the previous task, in which individual parts lists were considered, all materials for the touring aluminum bike are now also multiplied by the corresponding quantity required. This means that the total consumption of all materials across all stages can be considered.

Click SAP to return to the SAP Fiori Launchpad.

PP 4: Display Routing

Exercise Use SAP Fiori Launchpad to display a routing. **Time** 10 min

Task Review the routing for your black Deluxe Touring bike.

Name (Position) Jun Lee (Production Manager)

A routing is a series of sequential operations that are carried out to produce an end product. Routings contain information about where work needs to be performed, steps that need to be completed, and timelines assigned for each operation.

Routing


To review a routing, in the space *Production Planning and Execution* space and the role of *Production Manager*, use the app *Display Routing*.

Start




Enter *Material* **DXTR1###** and *Plant* **DL00**.

DXTR1###
DL00

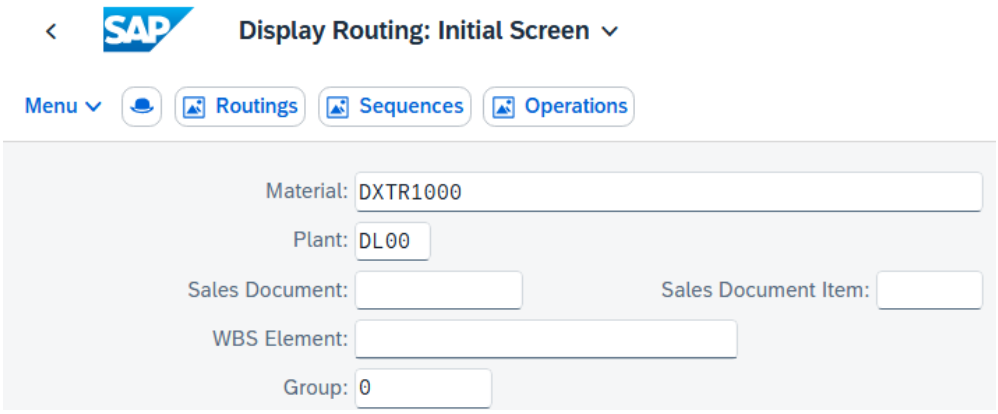

Then, click on Operations to display the following list of operations.

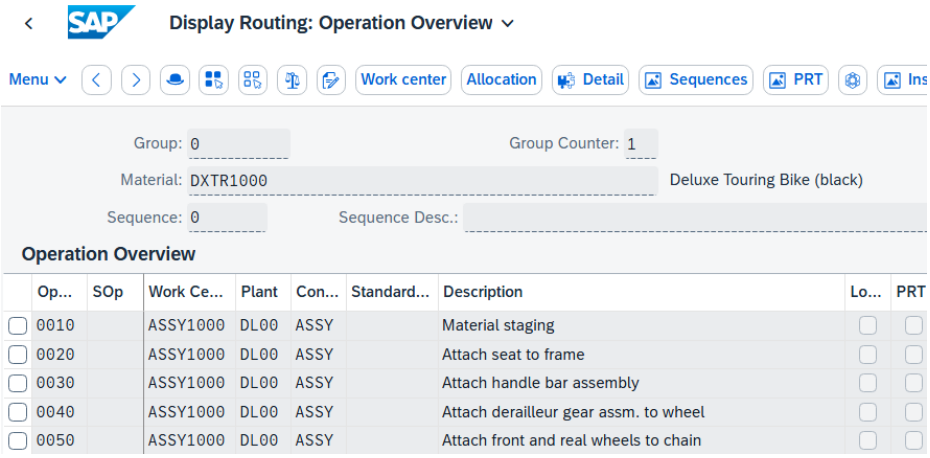

Select Allocation to display the list of components. If you don´t see the button Allocation follow the path **Menu ► Goto ► Allocation**.

Note None of the components is specifically assigned to an operation. The corresponding *Activity* column is empty for each component.




Select Operation to go back to the operation overview. Then find the following system menu item:

Menu ► Extras ► Scheduling ► Schedule

A popup for setting the scheduling appears. Enter **1** as the scheduling type and **10** as the lot size.

1
10

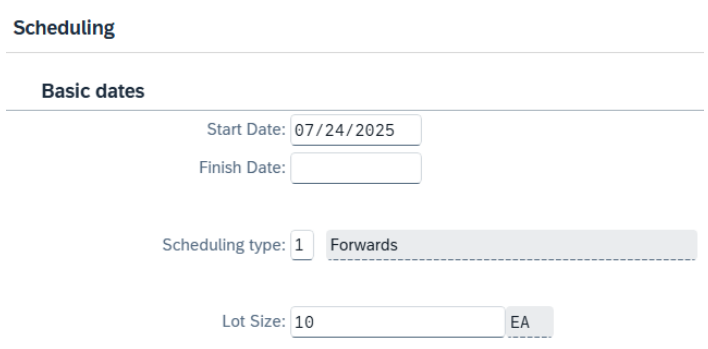

Press ✓. In the following popup, select as *overview var.* **000000000001** (operation segments). You can also use the value help for this.

000000000001



Press ✓ again. An overview of all operations, the latest start times and the respective setup, machining and teardown times is displayed.

Objects

Objects

Act.	Work Center	Latest start		Queue	Setup	Edit	Teardown	Wait	Transport
Sequence 0	Std.seq.								
0010	**ASSY1000**	**07/25/2025**	**08:00:00**	**0.0**	**0.0 MIN**	**6.7 MIN**	**0.0 MIN**	**0.0**	**0.0**
0020	ASSY1000	07/25/2025	08:07:30	0.0	0.0 MIN	10.0 MIN	0.0 MIN	0.0	0.0
0030	**ASSY1000**	**07/25/2025**	**08:18:45**	**0.0**	**0.0 MIN**	**20.0 MIN**	**0.0 MIN**	**0.0**	**0.0**
0040	ASSY1000	07/25/2025	08:41:15	0.0	0.0 MIN	20.0 MIN	0.0 MIN	0.0	0.0
0050	**ASSY1000**	**07/25/2025**	**09:03:45**	**0.0**	**0.0 MIN**	**50.0 MIN**	**0.0 MIN**	**0.0**	**0.0**
0060	ASSY1000	07/25/2025	10:00:00	0.0	0.0 MIN	20.0 MIN	0.0 MIN	0.0	0.0
0070	**ASSY1000**	**07/25/2025**	**10:22:30**	**0.0**	**0.0 MIN**	**20.0 MIN**	**0.0 MIN**	**0.0**	**0.0**
0080	INSP1000	07/25/2025	10:45:00	0.0	2.0 MIN	50.0 MIN	0.0 MIN	0.0	0.0
0090	**PACK1000**	**07/25/2025**	**11:43:30**	**0.0**	**0.0 MIN**	**50.0 MIN**	**0.0 MIN**	**0.0**	**0.0**
0100	PACK1000	07/25/2025	12:39:45	0.0	0.0 MIN	50.0 MIN	0.0 MIN	0.0	0.0
0110	**PACK1000**	**07/25/2025**	**13:36:00**	**0.0**	**0.0 MIN**	**3.3 MIN**	**0.0 MIN**	**0.0**	**0.0**

How long does sequence 0090 take?

_____

What is the total processing time?

_____

Click SAP to return to the SAP Fiori Launchpad.

PP 5: Display Work Center

Exercise Use the SAP Fiori Launchpad to display a work center. **Time** 15 min

Task Review a work center in Global Bike's plant in Dallas.


Name (Position) Jun Lee (Production Manager)

Work center

A work center is a location where operations are carried out for a production order. Capacities (setup, machine, and labor) are assigned to work centers so that they can be allocated and consumed within an order in a controlled and predictable manner. The work center capacity is created in and assigned to a single work center.


Start

To review a work center and the capacity assigned to it, in the space *Production Planning and Execution* space and the role of *Production Manager*, use the app *Display Work Center*.




DL00
F4

Enter *Plant* **DL00**. In the *Work center* field, use the **F4** help and choose Enter to display all work centers in Dallas. Then click in the *Work center* field and select the value help icon .

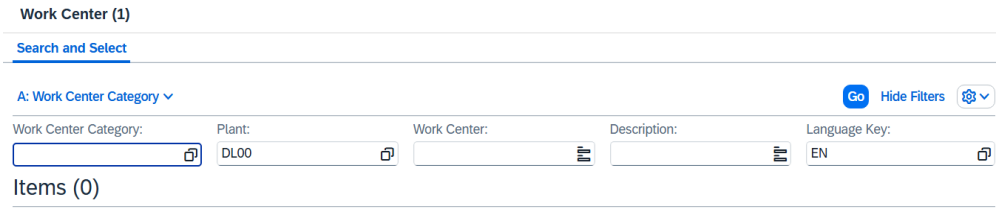


Accept the default settings and press Go to display all workstations in Dallas.

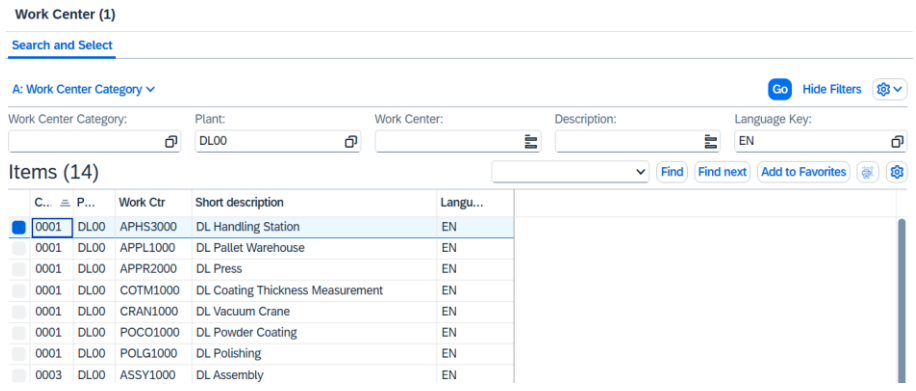

In the search results, click on the **DL Assembly** work center to select it and press OK to copy its number (**ASSY1000**).

ASSY1000

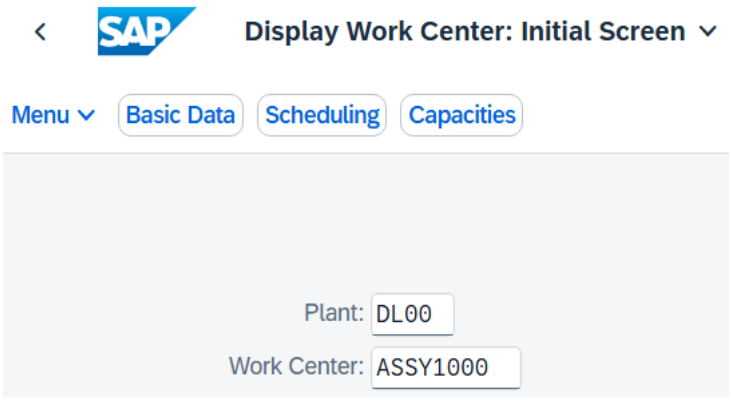


Back in the *Display Work Center: Initial Screen* press Basic Data.

On the *Basic Data* tab, find out who is the person responsible.


On the *Default Values* tab, click in the *Control key* field (**ASSY**) and select the value help icon. In the following popup, the entry Routing/Ref. op. set – internal proc. (**ASSY**) is already selected.

ASSY
F4

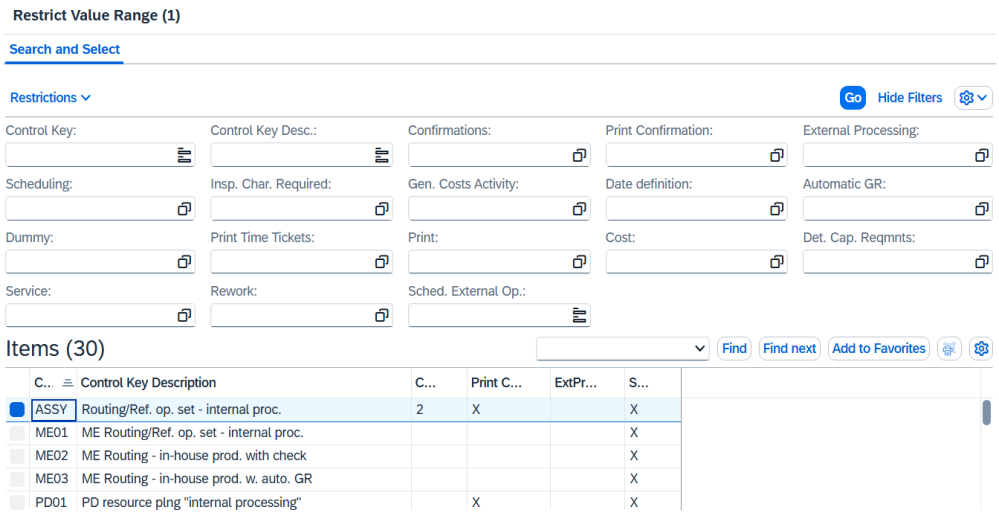

Press Cancel to return to the *Display Work Center: Scheduling*. Then select the *Scheduling* tab.

In the *Scheduling* tab, click next to the *Processing Duration* field. You will see the formula used for this formula key.

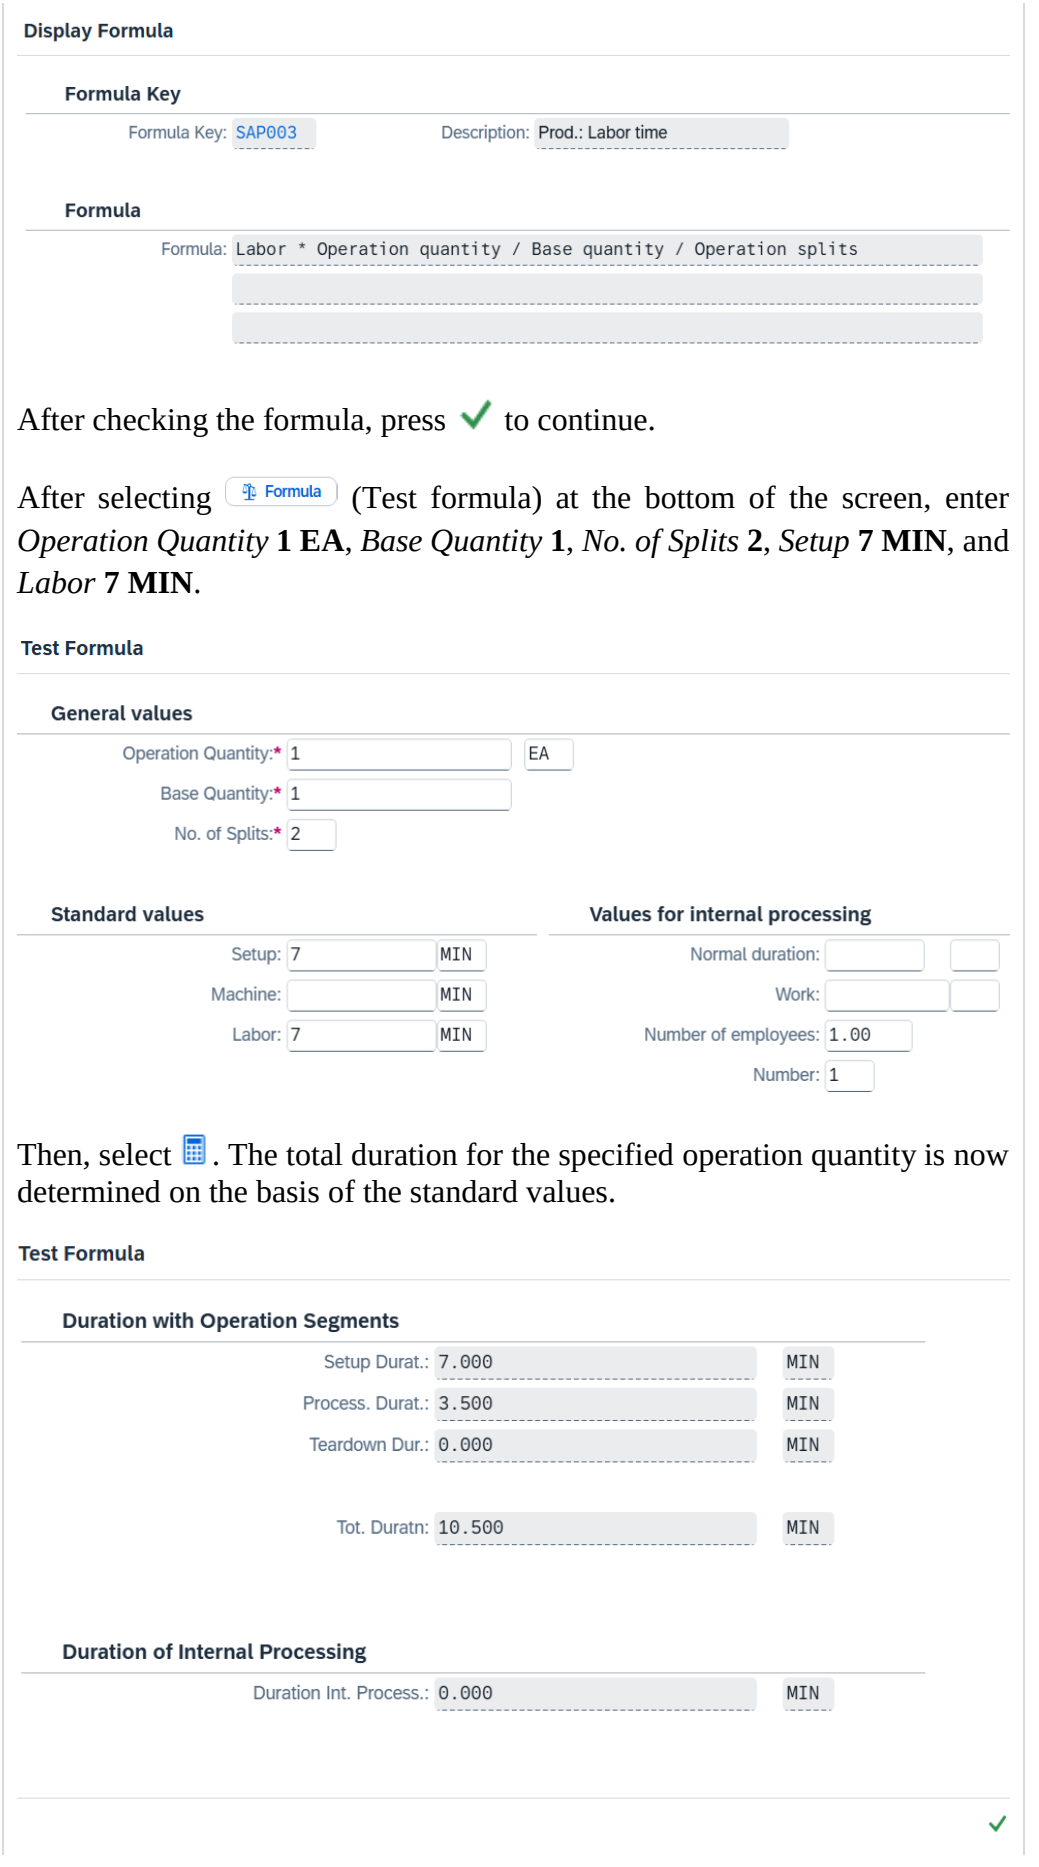

After checking the formula, press ✓ to continue.

After selecting Formula (Test formula) at the bottom of the screen, enter *Operation Quantity* **1 EA**, *Base Quantity* **1**, *No. of Splits* **2**, *Setup* **7 MIN**, and *Labor* **7 MIN**.

1 EA
1
2
7 MIN
7 MIN

Then, select . The total duration for the specified operation quantity is now determined on the basis of the standard values.

Click on ✓ to continue. The formula for process duration is:

```
Labor * Operation quantity / Base quantity / Operation splits
```

Did the Processing formula work correctly?

_____

Select End Formula Test to go back.

Click SAP to return to the SAP Fiori Launchpad.