

CS 493

Secure Software Systems

Intrusion Detection – part 1



Dr. Williams Central Connecticut State University

Know your intruder

- Not all intruders are the same

Classes of Intruders – Cyber Criminals


- Individuals or members of an organized crime group with a goal of financial reward
- Their activities may include:
 - Identity theft
 - Theft of financial credentials
 - Corporate espionage
 - Data theft
 - Data ransoming
- Typically they have some programming background – range from low skills to highly skilled driven by value of target
- They meet in underground forums to trade tips and data and coordinate attacks

Classes of Intruders – Activists

- Are either individuals, usually working as insiders, or members of a larger group of outsider attackers, who are motivated by social or political causes
- Also know as hacktivists
 - Skill level is often quite low
- Aim of their attacks is often to promote and publicize their cause typically through:
 - Website defacement
 - Denial of service attacks
 - Theft and distribution of data that results in negative publicity or compromise of their targets

Classes of Intruders – State-Sponsored Organizations

- Groups of hackers sponsored by governments to conduct espionage or sabotage activities
- Also known as **Advanced Persistent Threats** (APTs) due to the covert nature and persistence over extended periods involved with any attacks in this class
- Widespread nature and scope of these activities by a wide range of countries from China to the USA, UK, and their intelligence allies



Classes of Intruders – Others

- Hackers with motivations other than those previously listed
- Include classic hackers or crackers who are motivated by technical challenge or by peer-group esteem and reputation
- Many of those responsible for discovering new categories of buffer overflow vulnerabilities could be regarded as members of this class
- Given the wide availability of attack toolkits, there is a pool of “hobby hackers” using them to explore system and network security

Intruder Skill Levels – Apprentice

- Hackers with minimal technical skill who primarily use existing attack toolkits
- They likely comprise the largest number of attackers, including many criminal and activist attackers
- Given their use of existing known tools, these attackers are the easiest to defend against
- Also known as “script-kiddies” due to their use of existing scripts (tools)




Intruder Skill Levels – Journeyman

- Hackers with sufficient technical skills to modify and extend attack toolkits to use newly discovered, or purchased, vulnerabilities
- They may be able to locate new vulnerabilities to exploit that are similar to some already known
- Hackers with such skills are likely found in all intruder classes
- Adapt tools for use by others



Intruder Skill Levels – Master

- Hackers with high-level technical skills capable of discovering brand new categories of vulnerabilities
- Write new powerful attack toolkits
- Some of the better known classical hackers are of this level
- Some are employed by state-sponsored organizations
- Defending against these attacks is of the highest difficulty

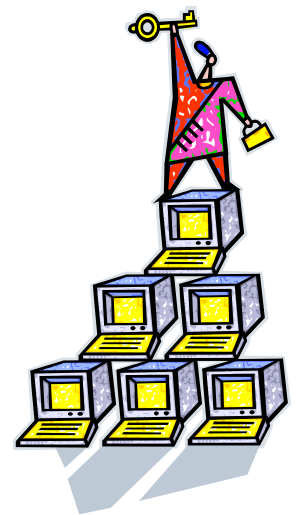

Examples of Intrusion

- Remote root compromise
- Web server defacement
- Guessing/cracking passwords
- Copying databases containing numbers
- Viewing sensitive data without authorization
- Running a packet sniffer
- Distributing pirated software
- Using an unsecured port to access internal network
- Using an unattended workstation



Intruder Behavior

Target acquisition
and information
gathering

Initial access

Privilege
escalation

Information
gathering or
system exploit

Maintaining
access

Covering tracks



Information gathering

Initial access

Privilege escalation

Information gathering or exploit

Maintain access

Cover tracks

(a) Target Acquisition and Information Gathering

- Explore corporate website for information on corporate structure, personnel, key systems, as well as details of specific web server and OS used.
- Gather information on target network using DNS lookup tools such as dig, host, and others; and query WHOIS database.
- Map network for accessible services using tools such as NMAP.
- Send query email to customer service contact, review response for information on mail client, server, and OS used, and also details of person responding.
- Identify potentially vulnerable services, eg vulnerable web CMS.



```
graph LR; A[Information gathering] --> B[Initial access]; B --> C[Privilege escalation]; C --> D[Information gathering or exploit]; D --> E[Maintain access]; E --> F[Cover tracks]
```

Information gathering

Initial access

Privilege escalation

Information gathering or exploit

Maintain access

Cover tracks

(b) Initial Access

- Brute force (guess) a user's web content management system (CMS) password.
- Exploit vulnerability in web CMS plugin to gain system access.
- Send spear-phishing email with link to web browser exploit to key people.

(c) Privilege Escalation

- Scan system for applications with local exploit.
- Exploit any vulnerable application to gain elevated privileges.
- Install sniffers to capture administrator passwords.
- Use captured administrator password to access privileged information.



Information gathering

Initial access

Privilege escalation

Information gathering or exploit

Maintain access

Cover tracks

(d) Information Gathering or System Exploit

- Scan files for desired information.
- Transfer large numbers of documents to external repository.
- Use guessed or captured passwords to access other servers on network.

(e) Maintaining Access

- Install remote administration tool or rootkit with backdoor for later access.
- Use administrator password to later access network.
- Modify or disable anti-virus or IDS programs running on system.



Information gathering

Initial access

Privilege escalation

Information gathering or exploit

Maintain access

Cover tracks

(f) Covering Tracks

- Use rootkit to hide files installed on system.
- Edit logfiles to remove entries generated during the intrusion.

Definitions

(From Internet Security Glossary)

Security Intrusion: A security event, or a combination of multiple security events, that constitutes a security incident in which an intruder gains, or attempts to gain, access to a system (or system resource) without having authorization to do so.

Intrusion Detection: A security service that monitors and analyzes system events for the purpose of finding, and providing real-time or near real-time warning of, attempts to access system resources in an unauthorized manner.

Intrusion Detection System (IDS)

- Host-based IDS (HIDS)
 - Monitors the characteristics of a single host for suspicious activity
- Network-based IDS (NIDS)
 - Monitors network traffic and analyzes network, transport, and application protocols to identify suspicious activity
- Distributed or hybrid IDS
 - Combines information from a number of sensors, often both host and network based, in a central analyzer that is able to better identify and respond to intrusion activity

Comprises three logical components:

- **Sensors - collect data**
- **Analyzers - determine if intrusion has occurred**
- **User interface - view output or control system behavior**

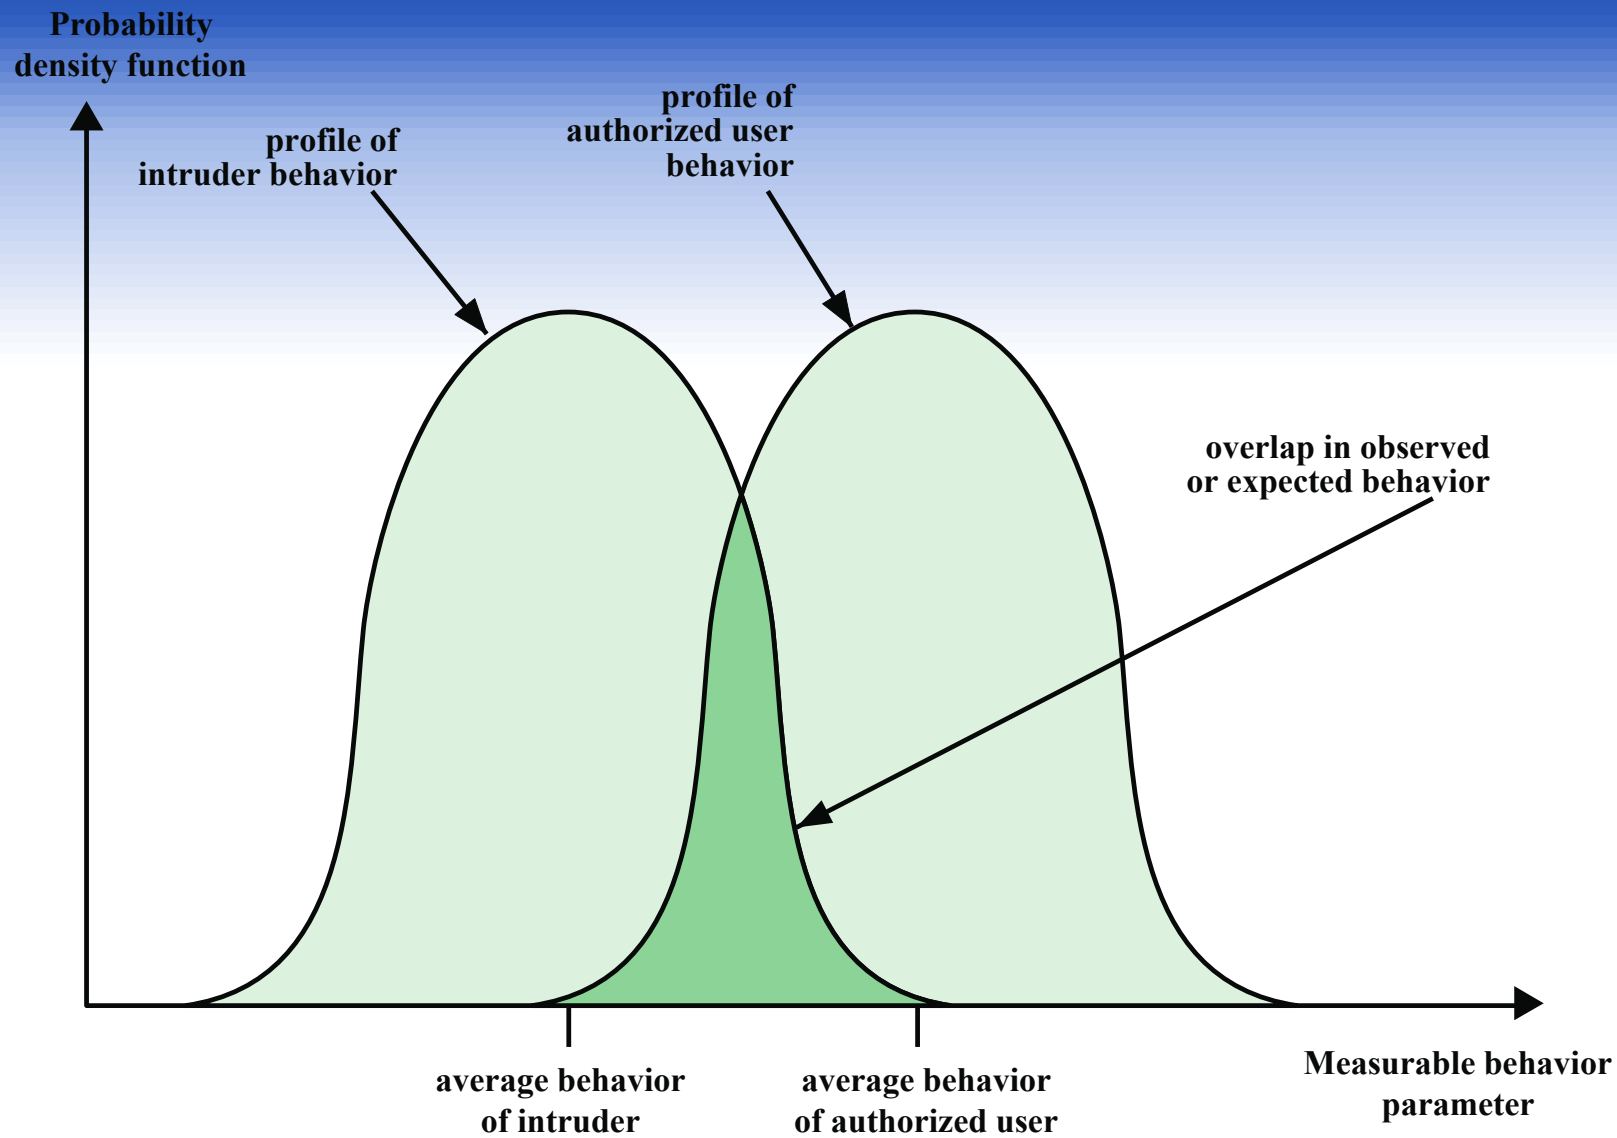


Figure 8.1 Profiles of Behavior of Intruders and Authorized Users

IDS Requirements

Run continually

Be fault tolerant

Resist subversion

**Impose a minimal
overhead on
system**

**Configured
according to
system security
policies**

**Adapt to changes
in systems and
users**

**Scale to monitor
large numbers of
systems**

**Provide graceful
degradation of
service**

**Allow dynamic
reconfiguration**

Analysis Approaches

Anomaly detection

- Involves the collection of data relating to the behavior of legitimate users over a period of time
- Current observed behavior is analyzed to determine whether this behavior is that of a legitimate user or that of an intruder

Signature/Heuristic detection

- Uses a set of known malicious data patterns or attack rules that are compared with current behavior
- Also known as misuse detection
- Can only identify known attacks for which it has patterns or rules

Anomaly Detection

A variety of classification approaches are used:

Statistical

- Analysis of the observed behavior using univariate, multivariate, or time-series models of observed metrics

Knowledge based

- Approaches use an expert system that classifies observed behavior according to a set of rules that model legitimate behavior

Machine-learning

- Approaches automatically determine a suitable classification model from the training data using data mining techniques

Signature or Heuristic Detection

Signature approaches

Match a large collection of known patterns of malicious data against data stored on a system or in transit over a network

The signatures need to be large enough to minimize the false alarm rate, while still detecting a sufficiently large fraction of malicious data

Widely used in anti-virus products, network traffic scanning proxies, and in NIDS

Rule-based heuristic identification

Involves the use of rules for identifying known penetrations or penetrations that would exploit known weaknesses

Rules can also be defined that identify suspicious behavior, even when the behavior is within the bounds of established patterns of usage

Typically rules used are specific


SNORT is an example of a rule-based NIDS

Host-Based Intrusion Detection (HIDS)

- Adds a specialized layer of security software to vulnerable or sensitive systems
- Can use either anomaly or signature and heuristic approaches
- Monitors activity to detect suspicious behavior
 - Primary purpose is to detect intrusions, log suspicious events, and send alerts
 - Can detect both external and internal intrusions



Data Sources and Sensors

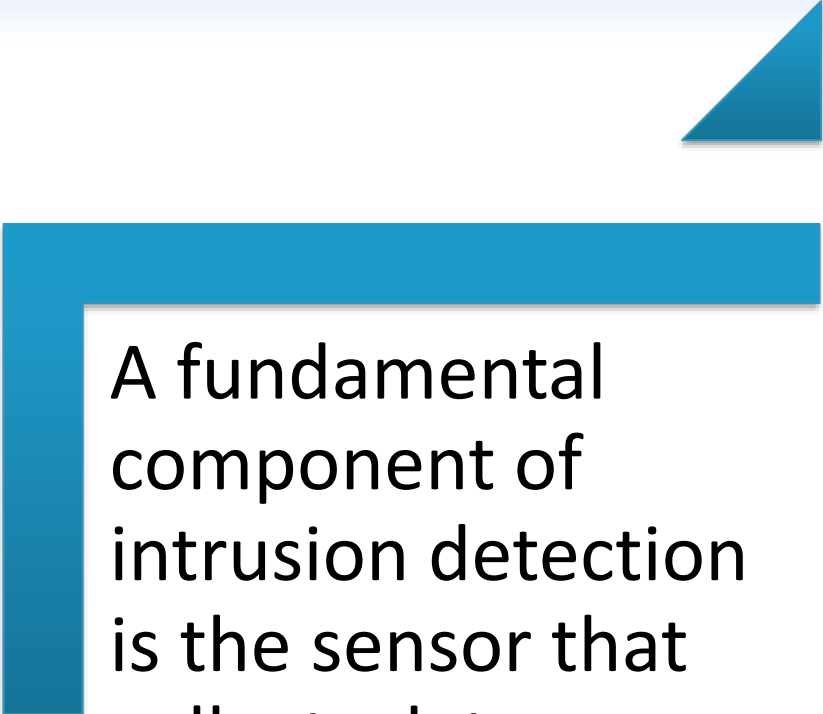

A fundamental component of intrusion detection is the sensor that collects data



Common data sources include:

- System call traces
- Audit (log file) records
- File integrity checksums
- Registry access

Network-Based IDS (NIDS)

Monitors traffic at selected points on a network

Examines traffic packet by packet in real or close to real time

May examine network, transport, and/or application-level protocol activity

Comprised of a number of sensors, one or more servers for NIDS management functions, and one or more management consoles for the human interface

Analysis of traffic patterns may be done at the sensor, the management server or a combination of the two

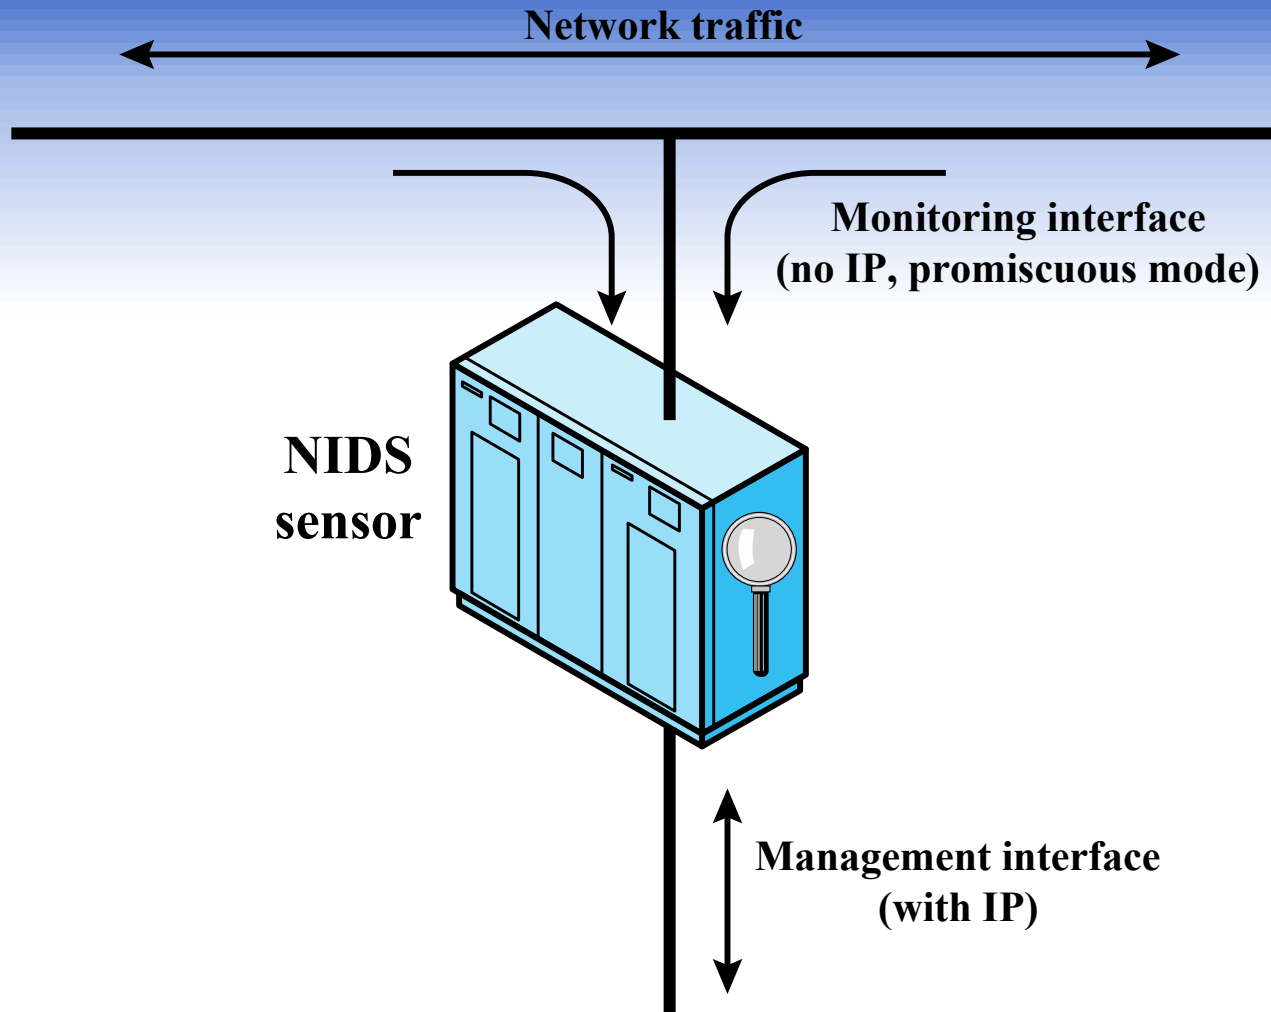


Figure 8.4 Passive NIDS Sensor

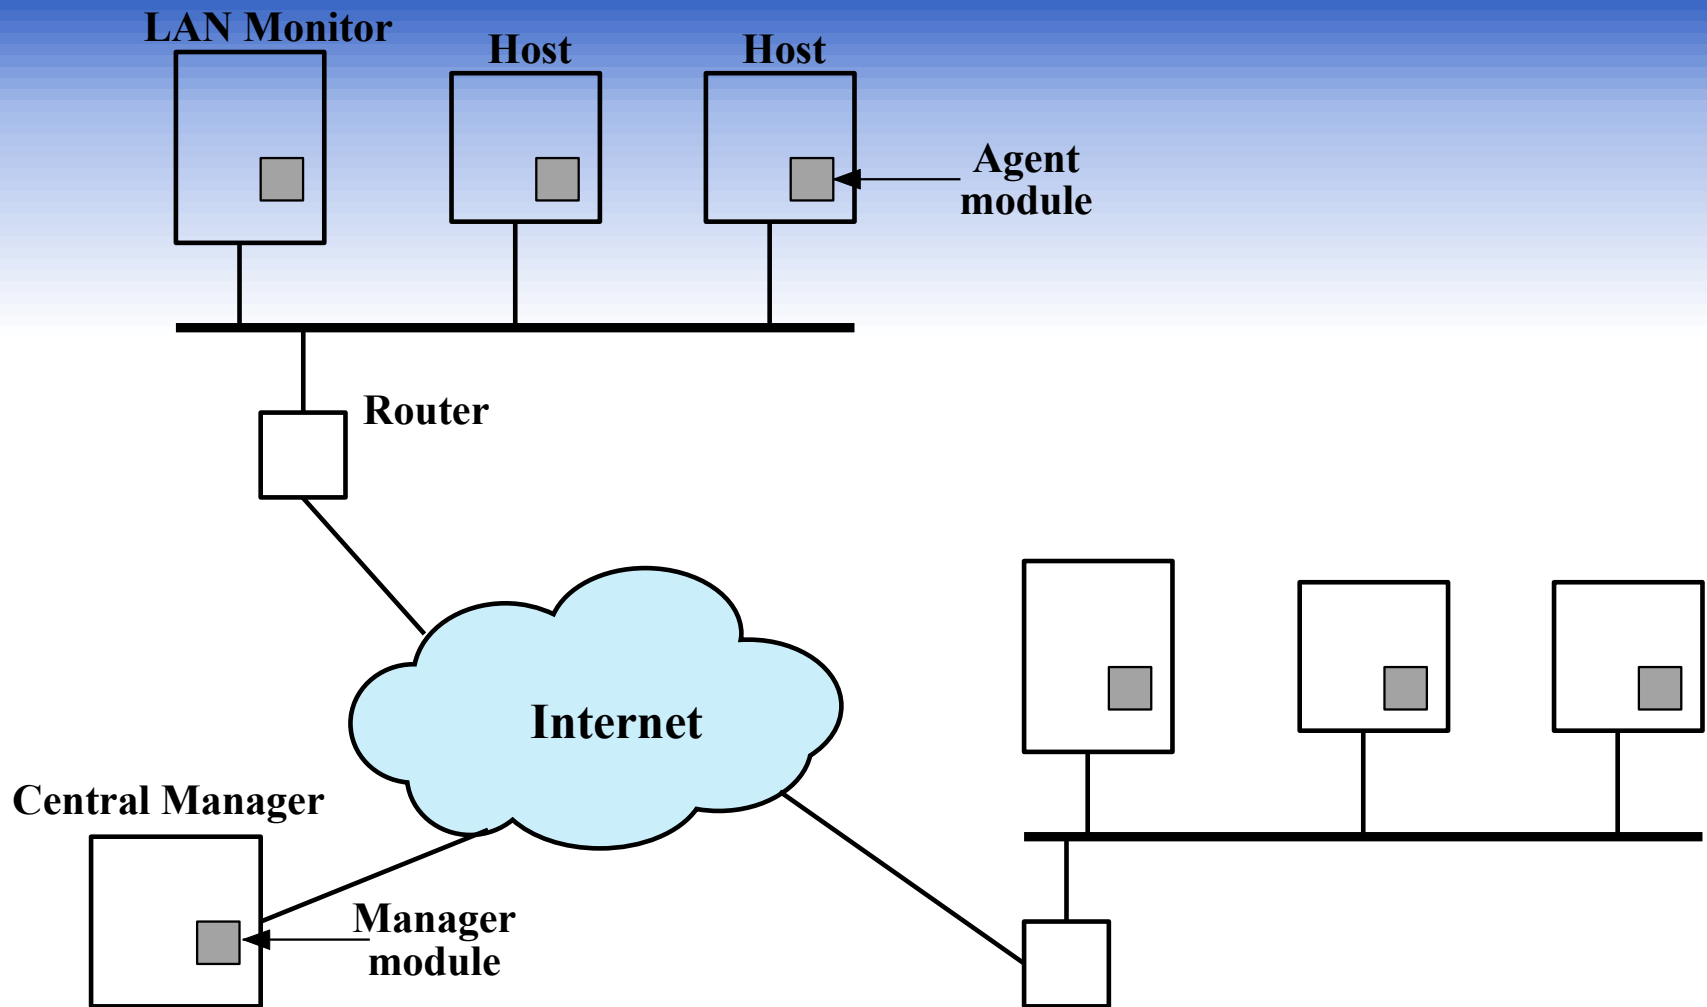


Figure 8.2 Architecture for Distributed Intrusion Detection


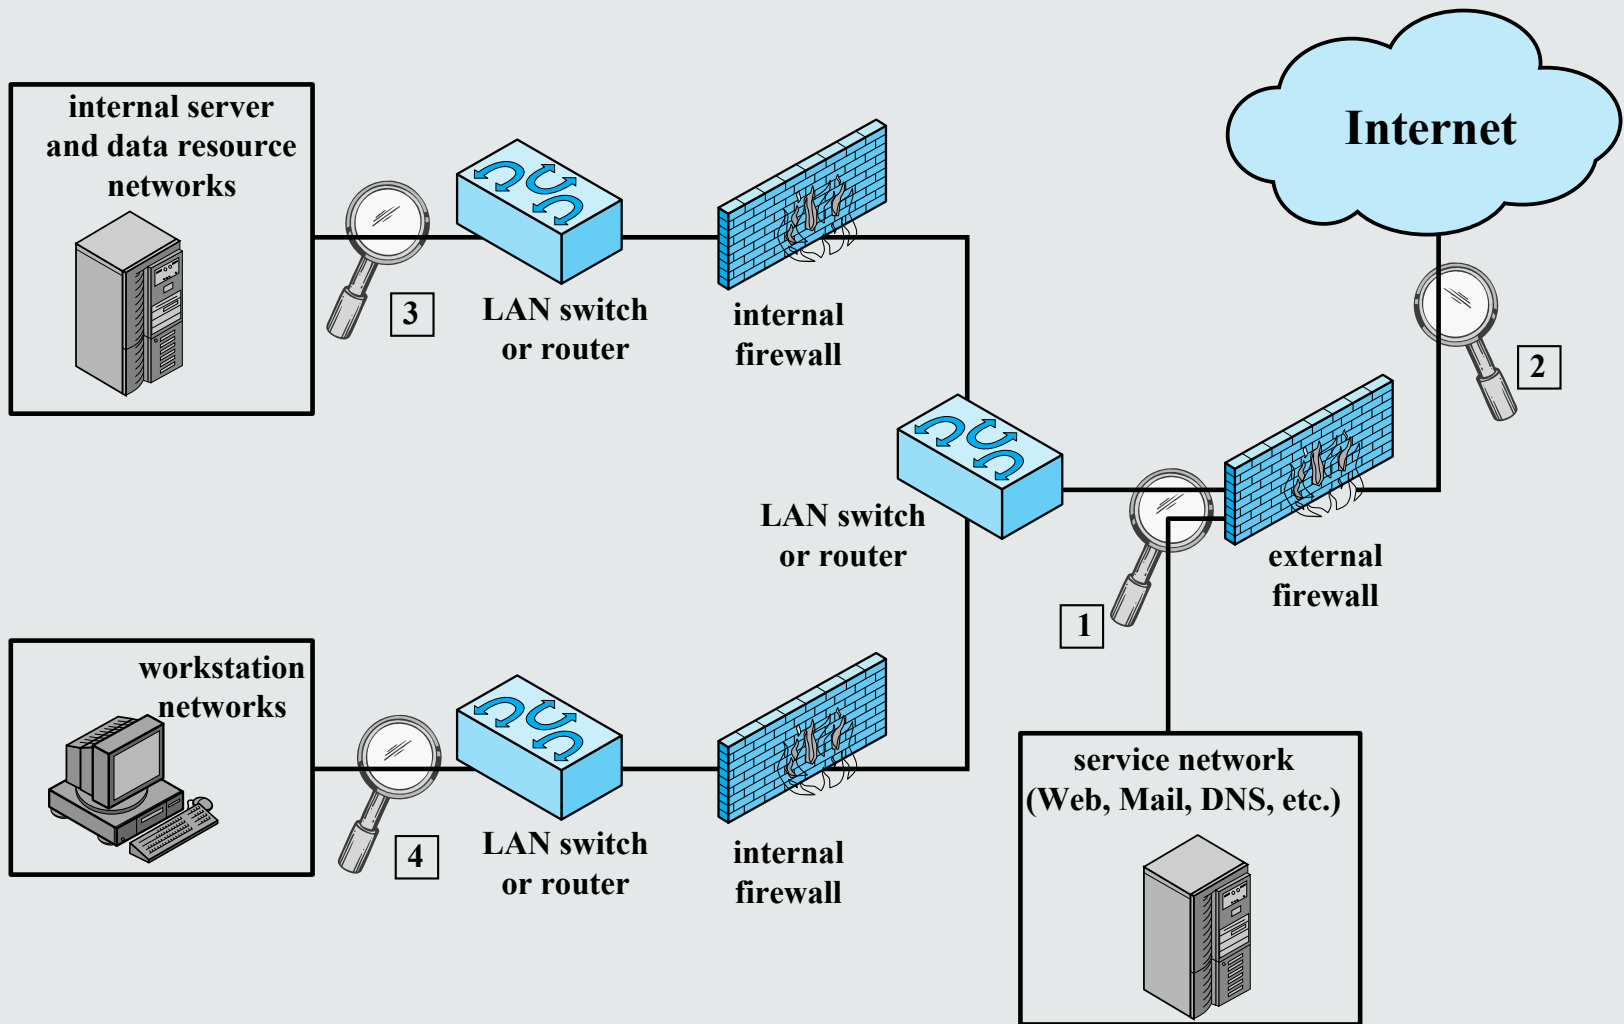


Figure 8.5 Example of NIDS Sensor Deployment

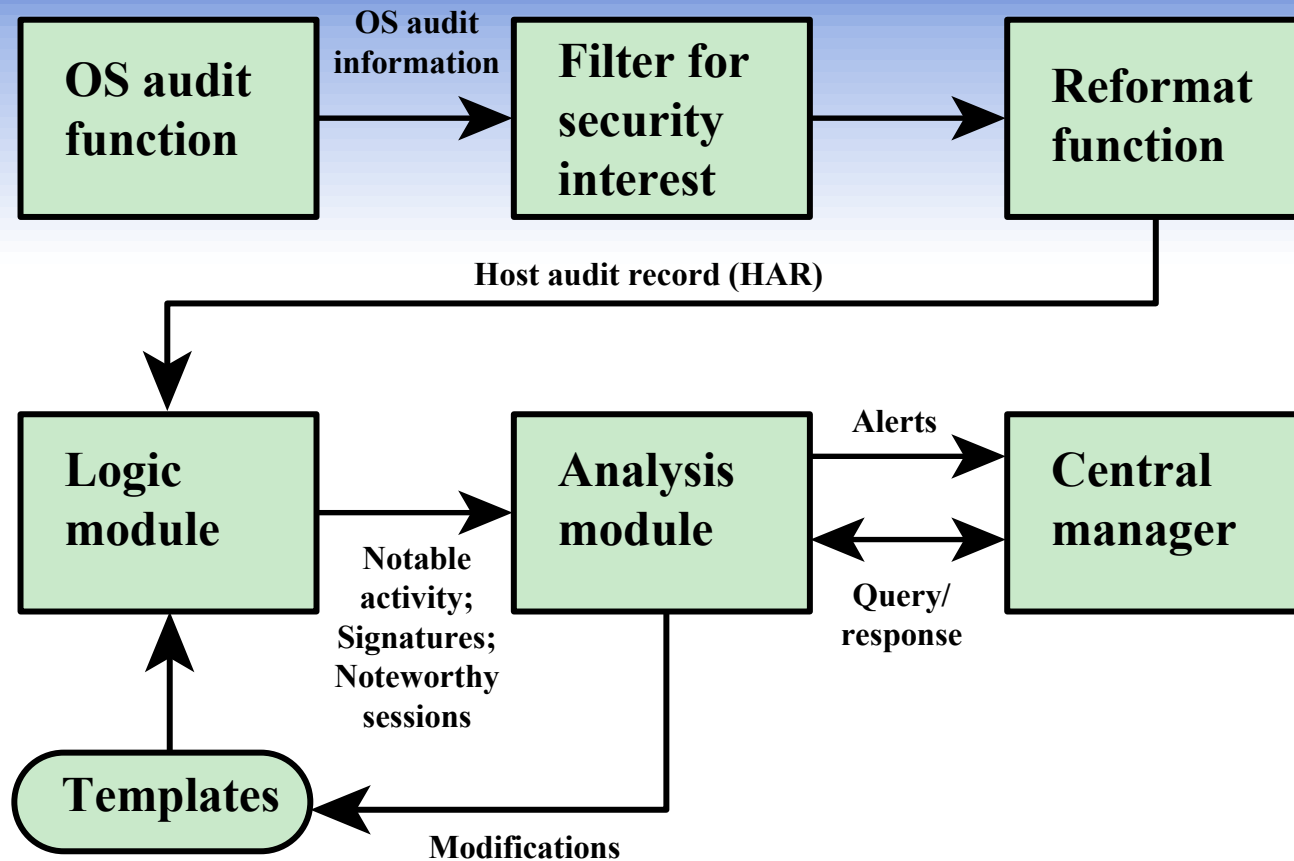

Agent Architecture

Intrusion Detection Techniques

Attacks suitable for Signature detection

- Application layer reconnaissance and attacks
- Transport layer reconnaissance and attacks
- Network layer reconnaissance and attacks
- Unexpected application services
- Policy violations

Attacks suitable for Anomaly detection

- Denial-of-service (DoS) attacks
- Scanning
- Worms