CCT College Dublin

Assessment Cover Page

Module Title:	Strategy Thinking
Assessment Title:	Project Report
Lecturer Name:	James Garza
Student Full Name:	Giulio Calef, Kevin Byrne and
	Victor Ferreira Silva
Student Number:	sba22314, sba22264, 2021324
Assessment Due Date:	7th May 2023
Date of Submission:	7th May 2023

Declaration

By submitting this assessment, I confirm that I have read the CCT policy on Academic Misconduct and understand the implications of submitting work that is not my own or does not appropriately reference material taken from a third party or other source. I declare it to be my own work and that all material from third parties has been appropriately referenced. I further confirm that this work has not previously been submitted for assessment by myself or someone else in CCT College Dublin or any other higher education institution.

Detecting and Predicting Severe Slugging in Petrobras 3W Data Set

Strategic Thinking Capstone Project

Giulio Calef Kevin Byrne Victor Ferreira Silva

Strategic Thinking Capstone Project

Higher Diploma in Science in Artificial Intelligence Applications CCT College Dublin Ireland May 2023

Contents

1	Intr	roduction	2
	1.1	Hypothesis	2
	1.2	General Goal	3
	1.3	Success Criteria	3
	1.4	Methodologies and Technologies	3
	1.5		4
2			4
	2.1		4
	2.2		5
	2.3	Exploratory Data Analysis	6
3	Dot	a Preparation	6
J	3.1	•	7
	$\frac{3.1}{3.2}$	8	8
	$\frac{3.2}{3.3}$		
		Train/Test Splitting	
	3.4	Handling Imbalanced Data	
	3.5	Data Scaling	
	3.6	Dimensionality Reduction	١U
4	Mo	deling 1	2
_	4.1	Baseline: DummyClassifier	12
	4.2	LinearSVC	
	1.2	4.2.1 Hyperparameter optimisation	
		4.2.2 Model training	
	4.3	k-Nearest Neighbors Classifier	
	1.0	4.3.1 Hyperparameter optimisation	
		4.3.2 Model training	
	4.4	Artificial Neural Network	
	4.4		
		4.4.2 Model definition	
		4.4.3 Model training	
	4.5	Decision Tree Classifier	
		4.5.1 Hyperparameter optimisation	
		4.5.2 Model training	
	4.6	Random Forest Classifier	
		4.6.1 Hyperparameter optimisation	
		4.6.2 Model training	19
5	Eva	luation 1	١9
•	5.1		19
	0.1	•	20
			20 20
			20 20
			20
	E 0		21
	5.2		21
	5.3	10-Fold Cross Validation	21
6	Con	nclusion	23

Detecting and Predicting Severe Slugging in Petrobras 3W Data Set

Giulio Calef, Kevin Byrne, Victor Ferreira Silva May 6, 2023

1 Introduction

Operational safety, productivity, quality are general key objectives in any industry, and in the oil and gas industry, environmental concerns are not only crucial, but they also pose as an immense daily challenge.

Generally, the oil industry has been increasingly adopting automated controls and monitoring processes (Venkatasubramanian et al. 2003) to comply with the increasingly higher standards in their operations. Such standards not only require more productive operations, but safer processes and more energy-efficient methods to achieve greater quality (Jämsä-Jounela 2007).

Thus, any event which can cause a production loss in an oil field are certainly very costly, in pure economic terms, but can also have dire costs in terms of human lives and of damage to our environment that can be hard to address or almost permanent in some cases. Therefore, any technique that can help early detection and/or prevention of technical accidents in the oil industry is therefore very welcome and "worth as gold".

Offshore oil wells provide some of the most challenging operating conditions in the industry, with additional complexity due to the peculiarities of operating at sea and the limited amount of instrumentation that can be deployed to monitor and control the well operational status.

One of the main challenges in oil industry is predicting undesirable events such as *Severe Slugging*. Severe Slugging is an critical flow assurance issue, commonly observed in offshore pipeline-riser systems, documented for the first time by Yocum (1973). Some of the consequences of this issue include flooding of downstream production facilities and an overall decrease in productivity. According Vargas et al. (2019) depending on the frequency it occurs and intensity, this event may even damage the equipment in the well, although specific operational actions can be taken to mitigate this issue since it is detected.

According Vargas et al. (ibid.), a simplified description of a typical offshore well can be seen in Figure 1 and its structure is basically composed by:

- The Christmas Tree, a structure lying on the seabed, at the well head, with pressure and temperature sensors and safety valves
- An Electro-Hydraylic Umbilical, which is how The Christmas Tree is remotely controlled.
- The Permanent Downhole Gauge (PDG), installed at the Christmas Tree;
- The Temperature and Pressure Transducer (TPT), also a part of the Christmas Tree;
- The Production Choke (PCK), installed on the drilling vessel/rig at the top;
- The Downhole Safety Valve (DHSV), a safety valve installed in the production tubing of wells

Given this, Petrobras, the Brazilian oil company, has developed a data set (3W) that contains data for the most common monitored variables in offshore oil wells. This project aims to understand the relations between these variables and oil well operational anomalies, such as Severe Slugging.

1.1 Hypothesis

The data present in 3W Data Set allows classifier models to predict Severe Slugging with high accuracy.

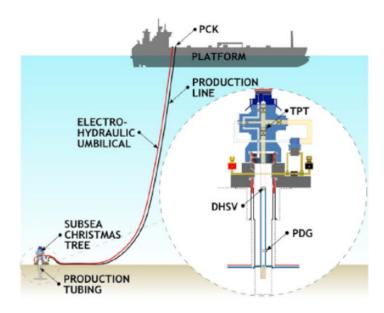


Figure 1: Schematic of a typical offshore well

1.2 General Goal

The business objective of our project is to apply machine learning techniques modeled in this project to the 3W data set to accurately predict *Severe Slugging* in an offshore well production line. Achieving a significant accuracy in these predictions should be possible by identifying the correlations between the variables presented in the records monitored in an offshore oil well operation.

1.3 Success Criteria

Success will be defined as the ability to accurately predict one or more of the conditions leading to an undesirable event. Given the potentially catastrophic impacts (ethical, environmental, economic) of accidents in the oil industry, the ability to predict a potential risk so that a quick reaction/fix can avoid unrecoverable conditions has a clear business value.

1.4 Methodologies and Technologies

The methodology that guided this project was *CRISP-DM*, which is most widely adopted methodology for data mining, analytics, and data science projects (*IBM SPSS Modeler CRISP-DM Guide* 2017). Given this, a number of software libraries and modules were used throughout this process to support some of its distinct stages, that is, Data Understanding, Data Preparation, Modeling, and Evaluation.

Once the methodology was defined, Petrobras' 3W Tool Kit was studied and used to extract the data from the instances interesting to the project, that is, from the real instances that effectively presented the Severe Slugging event.

Then, *Pandas* and *NumPy* libraries were selected for data manipulation and analysis. Then, the base machine learning library for the majority of models in this project was *Scikit-learn*, as it offers various preprocessing, classification models and clustering algorithms. Another library imported in this project was *Keras*, which is is an open-source solution that provides an interface for artificial neural networks.

Besides that, StandardScaler from the Scikit-learn library was selected for scaling and normalisation of the data. Given the high data imbalance presented by the data set, a RandomUnderSampler was also from Imbalanced-learn library was imported. Regarding feature reduction, the decomposition algorithm PCA, also from Scikit-learn, was adopted here in this study.

Also, Seaborn, Matplotlib and Plotly libraries were widely used to analyse data throughout the project and provide data visualisation using at the Evaluation stage. Another tool from Scikit-learn selected as a baseline model was DummyClassifier.

Additionally, the following tools from module *model_selection* in *Scikit-learn* library were chose:

- GridSearchCV, for hyperparameter tuning
- cross_val_score for cross-validation,
- train_test_split for train/test splitting,
- KFold for cross-validation during Evaluation

Ultimately, Scikit-learn library also provided the following classifiers for this project:

- LinearSVC, from svm module,
- KNeighborsClassifier, from *neighbors* module,
- DecisionTreeClassifier, from *tree* module,
- RandomForestClassifier, from ensemble module

Lastly, the modules $make_pipeline$ and Pipeline from Scikit-learn were used to chain all steps of the workflow together, and the library Pickle was selected to persist the resulting models in file.

1.5 Accomplishment

After extracting using 3W Tool Kit and some CRISP-DM iterations, this project presented 2 models with a high accuracy.

2 Data Understanding

Pre-processing a data set through data characterisation involves summarising the features and characteristics present in the data using statistical measures and visualisations techniques such as bar charts and scatter plots. After this stage, it should be possible to identify biases, patterns, trends, and any missing or irrelevant data in the data set that may need to be addressed.

This data set is composed by instances of eight types of undesirable events characterized by eight process variables from three different sources: real instances, simulated instances and hand-drawn instances. All real instances were taken from the plant information system that is used to monitor the industrial processes at an operational unit in Brazilian state of Espírito Santo. The simulated instances were all generated using OLGA, a dynamic multi-phase flow simulator that is widely used by oil companies worldwide (Andreolli 2016). Finally, the hand-drawn instances were generated by a specific tool developed by Petrobras researchers for this data set to incorporate undesirable events classified as rare.

Ultimately, only the data from the real instances was selected for this project, as simulated instances and hand-drawn instances did not present any record for two features relevant to Severe Slugging, namely Gas Lift Flow Rate and Pressure Variable Upstream Of the Gas Lift Choke.

2.1 Data Collection

The data used in this study was extracted after following the documentation from 3W took kit (Petrobras 2019b), which is a Python software package with resources to experiment machine learning-based approaches and algorithms for issues related to undesirable events. The specific data used in this study was from the *real instances*, and it was also available at Petrobras (2019a) at the time of publication of this study.

Column	pandas.Dtype	Description
timestamp	datetime64[ns]	timestamp
label	int64	label
well	object	well
id	int64	id
P-PDG	float64	pressure variable at the PDG, in Pa
P-TPT	float64	pressure variable at the TPT, in Pa
T-TPT	float64	temperature variable at the TPT, in °C
P-MON-CKP	float64	pressure variable upstream of CKP, in Pa
T-JUS-CKP	float64	temperature variable downstream of CKP, in °C
P-JUS-CKGL	float64	pressure variable upstream of CKGL, in °C
T-JUS-CKGL	float64	temperature variable upstream of CKGL, in °C
QGL	float64	gas life flow rate, SCM/s
class	float64	operation state: normal, fault, faulty steady
source	object	type of instance: real, simulated or hand-drawn

Table 1: Summary of the data set compiled from real instances

2.2 Data Characterisation

The selected data set consists of 13,952,911 observations, with 14 columns of data for each observation. The first column, label, indicates the event type for each observation. The second column, well, contains the name of the well the observation was taken from. Hand-drawn and simulated instances have fixed names for in this column, while real instances have names masked with incremental id. The third column, id, is an identifier for the observation and it is incremental for hand-drawn and simulated instances, while each real instance has an id generated from its first timestamp. The columns representing the process variables are:

The pressure features are measured in Pascal (Pa), the volumetric flow rate features are measured in standard cubic meters per second (SCM/s), and the temperature features are measured in degrees Celsius (°C).

Other information are also loaded into each pandas Dataframe:

- label: instance label (event type) target variable;
- well: well name. Hand-drawn and simulated instances have fixed names (respectively, drawn and simulated. Real instances have names masked with incremental id;
- id: instance identifier. Hand-drawn and simulated instances have incremental id. Each real instance has an id generated from its first timestamp;
- class: Although it can be used to identify periods of normal operation, fault transients, and faulty steady states, which can help with diagnosis and maintenance, it is a category which results from label, which is our target here

In order to maintain the realistic aspects of the data, the data set was built without pre-processing, including the presence of NaN values, frozen variables due to sensor or communication issues, instances with varying sizes, and outliers (Vargas et al. 2019).

A concise summary of this data set generated by *pandas.DataFrame.info* method can be seen on Table 1.

The labels for the possibel undesirable events found in the data set are:

- 0 Normal Operation = Normal
- 1 Abrupt Increase of BSW = AbrIncrBSW
- 2 Spurious Closure of DHSV = SpurClosDHSW
- 3 Severe Slugging = SevSlug
- 4 Flow Instability = FlowInst

Percentage of Present Values per Column

Proportion of available data per column, in %

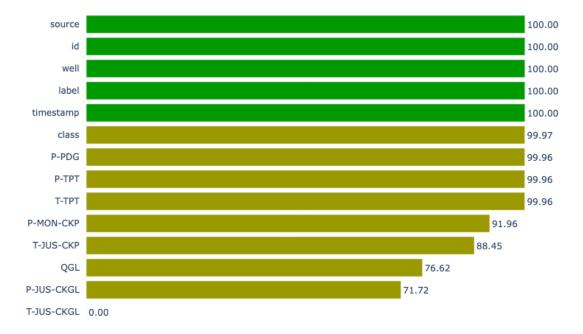


Figure 2: Proportion of available data per column, in %.

- 5 Rapid Productivity Loss = RProdLoss
- 6 Quick Restriction in PCK = QuiRestrPCK
- 7 Scaling in PCK = ScalingPCK
- 8 Hydrate in Production Line = HydrProdLine

2.3 Exploratory Data Analysis

A bar chart was generated displaying the percentage of present values in each column of the data frame - see Figure 2. The data set contained missing values in several columns, thus some columns and row were deleted in order to obtain accurate and reliable results.

Three boxplots were plotted to show how the data was distributed before any data cleaning - see Figure 3. They were divided according the feature measurement unit: the pressure features were measured in Pascal (Pa), the temperature features are measured in degrees Celsius (°C) and one feature about volumetric flow rate which was measured in standard cubic meters per second (SCM/s).

3 Data Preparation

Data preparation included Data Cleaning, Feature Engineering, Train/Test Splitting and Handling Imbalanced Data, Data Scaling, and an analysis of the chosen approach regarding dimensionality reduction for some models.

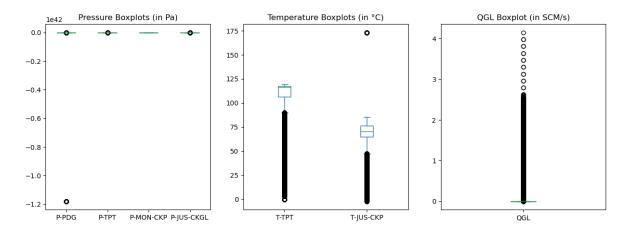


Figure 3: Box plots showing the distribution of pressure, temperature, and QGL (SCM/s) data for a set of oil wells.

3.1 Data Cleaning

The missing data from the following columns were removed: class, P-PDG, P-TPT, T-JUS-CKP, P-MON-CKP,T-TPT, P-MON-CKP, QGL and P-JUS-CKGL. After this, the columns class, T-JUS-CKGL (an empty column), id, source were dropped. Column class is a column which brings more details about label. Consider that columns timestamp, label were kept at this stage. Finally all duplicates were removed.

<class 'pandas.core.frame.DataFrame'>
Int64Index: 10003580 entries, 0 to 13952910
Data columns (total 10 columns):

```
#
     Column
                  Dtype
                  datetime64[ns]
 0
     timestamp
                  int64
     label
 1
 2
                  object
     well
     P-PDG
 3
                  float64
 4
     P-TPT
                  float64
 5
     T-TPT
                  float64
 6
     P-MON-CKP
                  float64
 7
     T-JUS-CKP
                  float64
 8
     P-JUS-CKGL float64
     QGL
                  float64
dtypes: datetime64[ns](1), float64(7), int64(1), object(1)
memory usage: 839.5+ MB
```

Also, as it can be seen on Figure 3, features P-PDG and P-TPT had the presence of extreme outliers. These outliers were also removed with the following code:

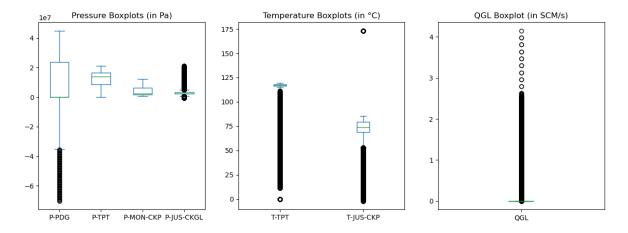


Figure 4: Box plots showing the distribution of pressure, temperature, and QGL (SCM/s) data without extreme outliers.

```
# removing extreme outliers from P-PDG
2 Q1 = df_clean['P-PDG'].quantile(0.25)
3 Q3 = df_clean['P-PDG'].quantile(0.75)
4 IQR = Q3 - Q1
5 lower_bound = Q1 - (3 * IQR)
6 df_no_outliers = df_clean[(df_clean['P-PDG'] >= lower_bound)]
7
8 # removing extreme outliers from P-TPT
9 Q1 = df_no_outliers['P-TPT'].quantile(0.25)
10 Q3 = df_no_outliers['P-TPT'].quantile(0.75)
11 IQR = Q3 - Q1
12 upper_bound = Q3 + (3 * IQR)
13 df_no_outliers = df_no_outliers[(df_no_outliers['P-TPT'] <= upper_bound)]
14
15 df_no_outliers.shape</pre>
```

(9780901, 10)

These rows with presence of extreme outliers represented 2.26% of the resulting rows so far. As a result the distribution of values in P-PDG and P-TPT were modified, as Figure 4 shows.

3.2 Feature Engineering

Given the label feature contains 8 possible numeric labels for each undesirable event and 1 label value 0 for normal observations, 8 new boolean columns were created for each one undesirable event, including for Severe Slugging, which is this project's target.

```
dt_feat = df_no_outliers
  # Changing 'label' column to object dtype
3
  dt_feat['label'] = dt_feat['label'].astype('object')
6 # Creating uint8 columns for each label
  label_dummies = pd.get_dummies(dt_feat['label'], prefix='label')
  dt_feat = pd.concat([dt_feat, label_dummies], axis=1)
10 # Renaming uint8 columns
  column_names = {
      'label_0': 'Normal',
12
      'label_1': 'AbrIncrBSW'
13
      'label_2': 'SpurClosDHSW',
14
      'label_3': 'SevSlug', # target
15
      'label_4': 'FlowInst',
16
      'label_5': 'RProdLoss',
17
      'label_6': 'QuiRestrPCK',
18
      'label_7': 'ScalingPCK',
19
```

```
'label_8': 'HydrProdLine'
20
21 }
dt_feat = dt_feat.rename(columns=column_names)
^{24} # Dropping the original 'label' column and Normal column,
# since all other events must be 0
26 dt_feat = dt_feat.drop(['label','Normal'], axis=1)
27 dt_feat.info()
  <class 'pandas.core.frame.DataFrame'>
  Int64Index: 9780901 entries, 0 to 13952910
  Data columns (total 16 columns):
   #
       Column
                      Dtype
  ___
       -----
   0
       timestamp
                      datetime64[ns]
       well
                       object
   2
       P-PDG
                       float64
   3
       P-TPT
                       float64
   4
       T-TPT
                       float64
   5
      P-MON-CKP
                       float64
   6
      T-JUS-CKP
                       float64
   7
       P-JUS-CKGL
                       float64
   8
                       float64
       QGL
   9
       AbrIncrBSW
                      uint8
   10 SpurClosDHSW uint8
   11 SevSlug
                       uint8
   12 FlowInst
                      nint8
   13 RProdLoss
                      uint8
   14 QuiRestrPCK
                       uint8
   15 ScalingPCK
                       uint8
  dtypes: datetime64[ns](1), float64(7), object(1), uint8(7)
  memory usage: 811.5+ MB
     Then all undesirable events columns were deleted but the column which denotes the observations
  presents Severe Slugging. The column HydrProdLine concerned to Hydrate in Production line, however
  this event was not found in the data set resulting from real instances.
dt_feat_target = dt_feat.drop([
      , 'SevSlug', 'HydrProdLine',
'AbrIncrBSW', 'SpurClosDHSW', 'FlowInst', 'RProdLoss', 'QuiRestrPCK', 'ScalingPCK'
4 ], axis=1)
6 dt_feat_target.info()
  <class 'pandas.core.frame.DataFrame'>
  Int64Index: 9780901 entries, 0 to 13952910
  Data columns (total 10 columns):
   #
       Column
                    Dtype
       _____
                    ____
   0
                    datetime64[ns]
       timestamp
   1
       well
                    object
   2
       P-PDG
                    float64
   3
      P-TPT
                    float64
       T-TPT
   4
                    float64
                    float64
   5
       P-MON-CKP
   6
                    float64
      T-JUS-CKP
   7
       P-JUS-CKGL float64
   8
       QGL
                    float64
   9
       SevSlug
                    uint8
  dtypes: datetime64[ns](1), float64(7), object(1), uint8(1)
```

memory usage: 755.6+ MB

3.3 Train/Test Splitting

The following code defined how the data set was split in Train and Test data sets. Additionally, the columns *timestamp* and *well* were removed and at the end the distribution of the records according the presence or absence of Severe Slugging was computed.

After the splitting process, the training data set had 6,846,630 rows and the test data set had 2,934,271 rows.

3.4 Handling Imbalanced Data

Name: SevSlug, dtype: float64

A RandomUnderSampler was chosen to balance training data. As a result 50% of observations presented Severe Slugging while the other 50% were normal or presented other undesirable event. Test data set was not balanced since this project aim to best represent your deployment scenarios in real life

Handling data imbalance is also important because it affects correlations - see as Figure 5 shows.

3.5 Data Scaling

Although there are features presenting non-normal distributions, StandardScaler was chosen as data scaler. It was chose because there are some features with strong correlation with Severe Slugging and lognormal distributions such as QGL and P-JUS-CKGL and as it is a method sensitive to the presence of outliers. The results of this transformation can be seen on Figure 6.

3.6 Dimensionality Reduction

The unsupervised learning technique Principal Component Analysis (PCA) was chosen not only to prepare the data for some of the models studied here, but also to evidence any possible linear separability in this model. In Figure 7 the results of this dimensionality reduction can be seen in two ways, with 2 and 3 components, although this process was unnecessary for the most successful models, that is, the non-linear classifiers.

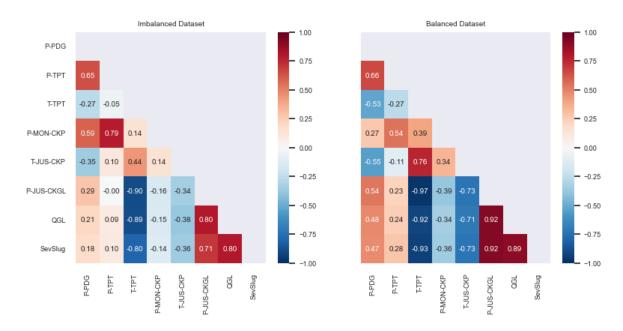


Figure 5: Correlations between variables before and after data balancing

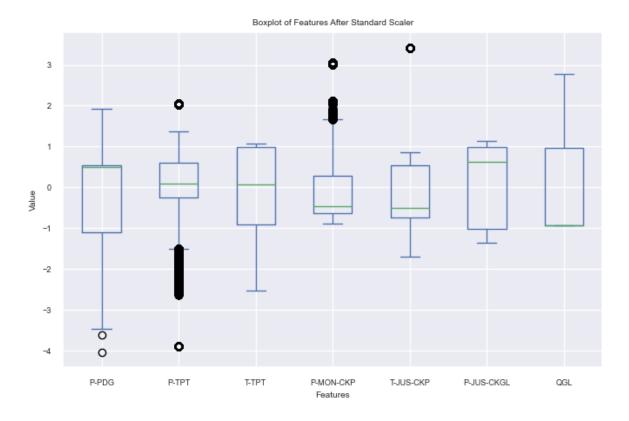


Figure 6: Box plot showing the distribution of the features in the training set after applying the StandardScaler transformation

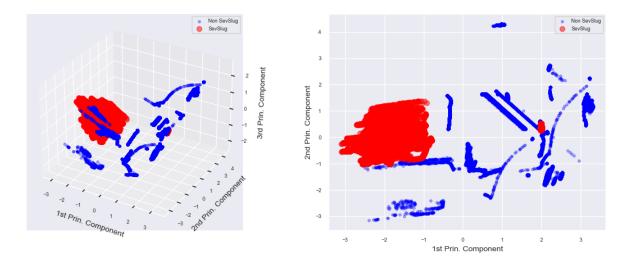


Figure 7: Visualisation of PCA applied to the data set showing a scatter plot for two (2D) and three (3D) principal components.

4 Modeling

For this project, five models were chosen: LinearSVC, k-Nearest Neighbors Classifier, Artificial Neural Network, Decision Tree Classifier and Random Forest Classifier.

4.1 Baseline: DummyClassifier

Before proceeding with other models, a DummyClassifier was adopted to find a baseline for validation accuracy using the test data set. Given the distribution of the target variable in test data set, the baseline for any model was set in 94.17%.

```
dummy_pipeline = make_pipeline(StandardScaler(), DummyClassifier())
dummy_pipeline.fit(X_train, y_train)

# confirming score for Dummy classifier results from a balanced dataset
score = dummy_pipeline.score(X_train, y_train)

# predicting
y_predicted = dummy_pipeline.predict(X_test)
baseline = metrics.accuracy_score(y_test, y_predicted)

print("Score: ", score)
print("Accuracy: ",baseline)
```

Score: 0.5

Accuracy: 0.9417780429960286

4.2 LinearSVC

Although the data is not linearly separable and it's not possible to find a condition of 100% correctly classified by a hyperplane, a linear support vector classifier (LinearSVC) was implemented as part of this benchmark.

4.2.1 Hyperparameter optimisation

For finding the best parameters for this model, the hyperparameters to tune PCA and the model were specified. Then a pipeline was created with 3 steps:

- 1. scaler which uses StandardScaler method to scale the data
- 2. dimred which applies PCA dimensionality reduction

3. linearsvc which applies the LinearSVC model.

Finally, a grid search was performed using the above-mentioned pipeline and the hyperparameter grid to find the combination with the best accuracy metric with the default cross-validation, that is, a 5-fold cross-validation.

```
from sklearn.svm import LinearSVC
  param_grid = {
3
      'dimred__n_components': [3, 4],
      'linearsvc__C': [1e-2, 1e-1, 1, 10, 100],
      'linearsvc__penalty':['11', '12'],
      'linearsvc__dual': [False, True],
      'linearsvc__class_weight': ['balanced', None]
  }
9
10
linear_svc_pipeline = Pipeline([
      ('scaler', scaler_pipeline),
12
      ('dimred', PCA()),
13
      ('linearsvc', LinearSVC())
14
15 ])
16
grid_search_lsvc = GridSearchCV(
      linear_svc_pipeline,
18
      param_grid=param_grid,
19
      n_{jobs=-1},
20
      scoring='accuracy',
21
      verbose=1
22
23 )
24
grid_search_lsvc.fit(X_train, y_train)
```

After this, the pipeline was defined with the best parameters found:

- 1. StandardScaler()
- 2. PCA(n_components=3)
- 3. LinearSVC(C=0.01, class_weight='balanced', dual=False, penalty='l1')

4.2.2 Model training

Then the model was trained using a similar pipeline, but this time with the optimal combination of parameters.

4.3 k-Nearest Neighbors Classifier

A k-Nearest Neighbors Classifier (KNeighbors Classifier) was implemented as part of this benchmark.

4.3.1 Hyperparameter optimisation

For finding the best parameters for this model, the hyperparameters to tune PCA and the model were specified. Then a pipeline was created with 3 steps:

- 1. scaler which uses StandardScaler method to scale the data
- 2. dimred which applies PCA dimensionality reduction
- 3. kneighborsclassifier which applies the KNeighborsClassifier model.

Finally, a grid search was performed using the above-mentioned pipeline and the hyperparameter grid to find the combination with the best accuracy metric with the default cross-validation, that is, a 5-fold cross-validation.

```
from sklearn.neighbors import KNeighborsClassifier
  knn_pipeline = Pipeline([
       ('scaler', scaler_pipeline), ('dimred', PCA()),
       ('kneighborsclassifier', KNeighborsClassifier())
6
  1)
9
  param_grid = {
      'dimred__n_components': [3, 4],
10
       'kneighborsclassifier__n_neighbors': range(3, 102, 3),
11
12 }
14 grid_search_knn = GridSearchCV(
15
       knn_pipeline,
      param_grid=param_grid,
16
17
       n_{jobs}=-1,
       scoring='accuracy',
18
       verbose=1
19
20 )
21
grid_search_knn.fit(X_train, y_train)
```

Then, the pipeline was redefined with the best parameters found considering the proposed scenario:

- 1. StandardScaler()
- 2. PCA(n_components=4)
- 3. KNeighborsClassifier(n_neighbors=3)

4.3.2 Model training

Then the model was trained using a similar pipeline, but this time with the optimal combination of parameters.

4.4 Artificial Neural Network

In this subsection, *Keras* was used to define a baseline model using Neural Networks, as it can be seen below. Also the parameter *batch_size* was set as 2048, a relatively high value for this parameter, but important to increase the chance of having some positive samples in each batch.

```
import tensorflow as tf
from tensorflow import keras
from keras import backend as K

BATCH_SIZE = 2048
```

4.4.1 Data Preparation for Keras

For this model, a distinct approach to prepare the data set was adopted. Firstly, the original imbalanced clean data set was copied and split with the same parameter $random_state=42$ used to generate the training data set used to fit and test the other models in this project. Secondly, the resulting train data set from this process was split again into train set and validation set.

Then, the validation set was only used during the model fitting to evaluate the loss, precision, recall and accuracy - however the model was not fit with this data. As a consequence, the test set was completely isolated during the training stage and was only used to evaluate how well the model generalizes to new data.

This approach is highly recommended to avoid over-fitting, which is a constant concern due to a possible lack of training data in imbalanced data sets (Martín Abadi et al. 2015) like the one used in this project, where the number of examples not presenting Severe Slugging class greatly outnumbered the examples presenting it.

Given this, the processes adopted for the data set in this section for data cleaning and scaling were the same processes adopted for the other models in this project, however the data is not balanced at this points. These adjustments were necessary to fulfill the requirements of a similar model described in TensorFlow Tutorial provided by Martín Abadi et al. (ibid.). The code that had performed these tasks can be see below.

```
1 ann_df = df_feat.copy() # copying the imbalanced but clean data set
3 non_sev_slug, sev_slug = np.bincount(ann_df['SevSlug'])
5 total = non_sev_slug + sev_slug
6 print('Examples:\n Total: {}\n
                                      SevSlug: \{\} (\{:.2f\}\% of total)\n'.format(
     total, sev_slug, 100 * sev_slug / total))
  Examples:
      Total: 9780901
      SevSlug: 568352 (5.81% of total)
# Dropping redundant columns for this project
2 ann_df.pop('timestamp')
3 ann_df.pop('well')
4 ann_df.columns
  Index(['P-PDG', 'P-TPT', 'T-TPT', 'P-MON-CKP', 'T-JUS-CKP', 'P-JUS-CKGL',
          'QGL', 'SevSlug'],
        dtype='object')
1 # Splitting data
2 ann_train_df, ann_test_df = train_test_split(ann_df, test_size=0.3, random_state=42)
ann_train_df, ann_val_df = train_test_split(ann_train_df, test_size=0.3)
5 # Form np arrays of labels and features
6 train_labels = np.array(ann_train_df.pop('SevSlug'))
7 bool_train_labels = train_labels != 0
8 val_labels = np.array(ann_val_df.pop('SevSlug'))
9 test_labels = np.array(ann_test_df.pop('SevSlug'))
train_features = np.array(ann_train_df)
val_features = np.array(ann_val_df)
13 test_features = np.array(ann_test_df)
1 # Normalising data with a previously instantiated StandardScaler
train_features = scaler.fit_transform(train_features)
3 val_features = scaler.transform(val_features)
4 test_features = scaler.transform(test_features)
6 print('ANN Training labels shape:', train_labels.shape)
7 print('ANN Validation labels shape:', val_labels.shape)
8 print('Test labels shape:', test_labels.shape)
```

```
print('ANN Training features shape:', train_features.shape)
print('ANN Validation features shape:', val_features.shape)
print('Test features shape:', test_features.shape)

ANN Training labels shape: (4792641,)
ANN Validation labels shape: (2053989,)
Test labels shape: (2934271,)
ANN Training features shape: (4792641, 7)
ANN Validation features shape: (2053989, 7)
Test features shape: (2934271, 7)
```

4.4.2 Model definition

Instead of using GridSearchCV to tune hyperparameters like in other models in this project, an initial model was defined and then after analysing its results the initial bias was fixed. Then the model was trained again and had its resulting metrics evaluated considering the validation data set. In the following code the implementation of this initial model is described after listing some metrics available in Keras library that were used to evaluate the model.

The architecture of this model is visible on Figure 8 and it has one input layer representing all 7 features from the data set, one densely connected hidden layer with 16 units, a dropout layer to mitigate over-fitting and an one-unit output layer that returns the probability of Severe Slugging.

```
1 ANN_METRICS = [
      keras.metrics.TruePositives(name='tp'),
      keras.metrics.FalsePositives(name='fp'),
      keras.metrics.TrueNegatives(name='tn'),
      keras.metrics.FalseNegatives(name='fn'),
      keras.metrics.BinaryAccuracy(name='accuracy'),
6
      keras.metrics.Precision(name='precision'),
      keras.metrics.Recall(name='recall'),
      keras.metrics.AUC(name='auc'),
      keras.metrics.AUC(name='prc', curve='PR'), # precision-recall curve
10
11 ]
12
def make_model(metrics=ANN_METRICS, output_bias=None):
      if output_bias is not None:
14
          output_bias = tf.keras.initializers.Constant(output_bias)
15
      model = keras.Sequential([
16
17
          keras.layers.Dense(16, activation='relu',input_shape=(train_features.shape
      [-1],)),
          keras.layers.Dropout(0.5),
          keras.layers.Dense(1, activation='sigmoid',bias_initializer=output_bias),
19
20
21
      model.compile(
22
          optimizer=keras.optimizers.Adam(learning_rate=1e-3),
23
          loss=keras.losses.BinaryCrossentropy(),
24
25
          metrics=metrics)
26
      return model
```

```
EPOCHS = 100

early_stopping = tf.keras.callbacks.EarlyStopping(
    monitor='val_prc',
    verbose=1,
    patience=10,
    mode='max',
    restore_best_weights=True)

ann_model = make_model()
ann_model.summary()
```

```
Model: "sequential_5"
```




Figure 8: The architecture of a neural network model built using Keras

Layer (type)	Output Shape	Param #
dense_10 (Dense)	(None, 16)	128
dropout_5 (Dropout)	(None, 16)	0
dense_11 (Dense)	(None, 1)	17

Total params: 145 (580.00 Byte) Trainable params: 145 (580.00 Byte) Non-trainable params: 0 (0.00 Byte)

4.4.3 Model training

```
ann_model = KerasClassifier(
      build_fn=build_clf ,
      num_units=grid_search_ann.best_params_['ann_model__num_units'],
3
      num_hidden_layers=grid_search_ann.best_params_['ann_model__num_hidden_layers'],
      verbose=0
5
6
  )
  ann_pipeline = Pipeline([
       ('scaler', scaler_pipeline),
       ('ann_model', ann_model)
10
11 ])
12
13 ann_pipeline.fit(
14
      X_train,
15
      y_train,
16
      ann_model__epochs=8,
      ann_model__verbose=0
17
18 )
```

4.5 Decision Tree Classifier

As the data is not linearly separable and it's not possible to find a condition of 100% correctly classified by a hyperplane, a non-linear classifier is recommended, thus a Decision Tree Classifier was implemented as part of this benchmark.

4.5.1 Hyperparameter optimisation

For finding the best parameters for this model, the hyperparameters to tune the model were specified. Then a pipeline was created with 1 step:

1. decisiontreeclassifier which applies the Decision Tree model.

Finally, a grid search was performed using the above-mentioned pipeline and the hyperparameter grid to find the combination with the best accuracy metric with the default cross-validation, that is, a 5-fold cross-validation.

```
tree_pipeline = Pipeline([
      ('decisiontreeclassifier', DecisionTreeClassifier())
  ])
3
5
  param_grid = {
      'decisiontreeclassifier__min_samples_split': [2, 5, 10],
      'decisiontreeclassifier__min_samples_leaf': [1, 2, 4],
      'decisiontreeclassifier__max_features': ['sqrt', 'log2']
9
  }
  grid_search_tree = GridSearchCV(
11
      tree_pipeline,
12
      param_grid=param_grid,
13
      n_{jobs=-1},
14
15
      scoring='accuracy',
16
      verbose=1
17 )
grid_search_tree.fit(X_train, y_train)
```

Then, the one-step pipeline was redefined with the best parameters found considering the proposed scenario:

1. DecisionTreeClassifier(max_features='sqrt')

4.5.2 Model training

Then the model was trained using a similar pipeline, but this time with the optimal combination of parameters.

4.6 Random Forest Classifier

As the data is not linearly separable and it's not possible to find a condition of 100% correctly classified by a hyperplane, a non-linear classifier is recommended, thus a Random Forest Classifier was implemented as part of this benchmark.

4.6.1 Hyperparameter optimisation

For finding the best parameters for this model, the hyperparameters to tune the model were specified. Then a pipeline was created with 1 step:

1. randomforestclassifier which applies the Random Forest model.

Then, a grid search was performed using the above-mentioned pipeline and the hyperparameter grid to find the combination with the best accuracy metric with the default cross-validation, that is, a 5-fold cross-validation.

```
1 from sklearn.ensemble import RandomForestClassifier
3 rf_pipeline = Pipeline([
      ('randomforestclassifier', RandomForestClassifier())
5])
7 param_grid = {
      'randomforestclassifier__class_weight': ['balanced', 'balanced_subsample']
9 }
10
grid_search_rf = GridSearchCV(
      rf_pipeline,
12
      param_grid=param_grid,
13
14
      n_{jobs}=-1,
      scoring='accuracy',
15
      verbose=1
16
17 )
18
grid_search_rf.fit(X_train, y_train)
```

Then, the one-step pipeline was redefined with the best parameter found considering the proposed scenario:

1. RandomForestClassifier(class_weight='balanced')

4.6.2 Model training

Then the model was trained using a similar pipeline, but this time with the optimal combination of parameters.

5 Evaluation

5.1 Classification Report

The classification reports for all 5 models were generated by the code below.

```
# LinearSVC
cr_linearsvc = metrics.classification_report(y_test, y_predicted_lin_clf, digits=4)

# kNN
cr_knn = metrics.classification_report(y_test, y_predicted_knn, digits=4)

# Neural Networks
y_predicted_ann = y_predicted_ann.flatten()
y_predicted_ann = np.where(y_predicted_ann.round(2) > 0.5, 1, 0)
cr_ann = metrics.classification_report(y_test, y_predicted_ann, digits=4)

# Decision Tree
cr_tree = metrics.classification_report(y_test, y_predicted_tree, digits=4)

# Random Forest
cr_rf = metrics.classification_report(y_test, y_predicted_rf, digits=4)
```

5.1.1 LinearSVC

printing classification report for LinearSVC

print(cr_linearsvc)

	precision	recall	f1-score	support
0	0.9980 0.7568	0.9808 0.9687	0.9893 0.8498	2763432 170839
accuracy			0.9801	2934271
macro avg	0.8774	0.9747	0.9195	2934271
weighted avg	0.9840	0.9801	0.9812	2934271

5.1.2 k-Neighbors Classifier

printing classification report for kNN classifier

print(cr_knn)

	precision	recall	f1-score	support
0	0.9999	0.9949	0.9974	2763432
1	0.9233	0.9979	0.9591	170839
accuracy			0.9950	2934271
macro avg	0.9616	0.9964	0.9782	2934271
weighted avg	0.9954	0.9950	0.9951	2934271

5.1.3 Neural Networks

 $_{\rm 1}$ # printing classification report for ANN

print(cr_ann)

	precision	recall	f1-score	support
0 1	0.9990 0.8101	0.9857 0.9839	0.9923 0.8885	2763432 170839
accuracy macro avg weighted avg	0.9045 0.9880	0.9848 0.9856	0.9856 0.9404 0.9863	2934271 2934271 2934271

5.1.4 Decision Tree

printing classification report for Decision Tree

print(cr_tree)

	precision	recall	f1-score	support
0 1	1.0000 0.9960	0.9998 0.9998	0.9999 0.9979	2763432 170839
accuracy			0.9998	2934271
macro avg	0.9980	0.9998	0.9989	2934271
weighted avg	0.9998	0.9998	0.9998	2934271

5.1.5 Random Forest

```
# printing classification report for Random Forest
print(cr_rf)
```

	precision	recall	f1-score	support
0	1.0000	0.9999	1.0000	2763432
1	0.9987	1.0000	0.9993	170839
accuracy			0.9999	2934271
macro avg	0.9993	1.0000	0.9996	2934271
weighted avg	0.9999	0.9999	0.9999	2934271

5.2 Confusion Matrices

In this section the confusion matrices for every model for test labels were computed and plotted side by side on Figure 9.

5.3 10-Fold Cross Validation

Finally, a K-Folds cross-validator was selected to split training data set into 10 consecutive folds and compute the mean accuracy and the respective standard deviation for each model. The models were still put on the same pipelines used on modeling section.

```
models = [
       ('Random Forest', rf_pipeline),
       ('Decision Tree', tree_pipeline),
3
       ('KNeighborsClassifier', knn_pipeline),
       ('Neural Networks', ann_pipeline),
5
       ('Linear SVC', linear_svc_pipeline)
6
  1
7
for name, model in models:
       kfold = KFold(n_splits=10, shuffle=True, random_state=42)
2
       cv_results = cross_val_score(model, X_train, y_train, cv=kfold, scoring='accuracy'
4
       cross_validation_dict[name] = cv_results
6
       \label{eq:msg} \texttt{msg} \; = \; \texttt{"} \& \texttt{s} : \; \& \texttt{f} \; ( \& \texttt{f} ) \; \texttt{"} \; \& \; (\texttt{name, np.nanmean(cv_results), np.nanstd(cv_results))}
       print(msg)
```

Random Forest: 0.999940 (0.000018)

Decision Tree: 0.999826 (0.000069)

KNeighborsClassifier: 0.998610 (0.000138)

Neural Networks: 0.978187 (0.001739)

Linear SVC: 0.974343 (0.000403)

The following code was implemented to plot how the mean score after cross validation was distributed in each model. This chart can be visualised on Figure 10.

```
# comparing algorithms
fig = plt.figure()
fig.suptitle('Distribution of Mean Score After 10-fold Cross Validation By Algorithm')
ax = fig.add_subplot(111)
plt.boxplot(cross_validation_dict.values())
ax.set_xticklabels(cross_validation_dict.keys())
fig.set_size_inches(8,4)
plt.show()
```

.



Figure 9: Confusion matrices showing the performance of five machine learning models in predicting severe slugging occurrences

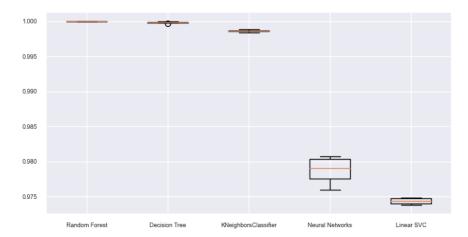


Figure 10: Box plots showing the distribution of Mean Score After 10-fold Cross Validation By Algorithm

6 Conclusion

In this study, Random Forest and Decision Tree Classifiers had the best performance overall with 99.994% and 99.982% of accuracy respectively. These non-linear classifiers could find better results because the 3W data set does not present a clear linear separability between records related to Severe Slugging and other normal records or other undesirable events.

References

Andreolli, Ivanilto (2016). "Introdução à elevação e escoamento monofásico e multifásico de petróleo". In: Rio de Janeiro: Interciência.

IBM SPSS Modeler CRISP-DM Guide (2017). Accessed: 2023-05-06. URL: https://www.ibm.com/docs/en/spss-modeler/18.1.1?topic=spss-modeler-crisp-dm-guide.

Jämsä-Jounela, Sirkka-Liisa (2007). "Future trends in Process Automation". In: Annual Reviews in Control 31.2, pp. 211–220. DOI: 10.1016/j.arcontrol.2007.08.003.

Martín Abadi et al. (2015). Classification on imbalanced data: Tensorflow Core. Software available from tensorflow.org. URL: https://www.tensorflow.org/tutorials/structured_data/imbalanced_data.

Petrobras, Petróleo Brasileiro S.A (2019a). 3W Dataset - Real Instances. Accessed on: 2023-05-04. Data retrieved from 3W tool kit, only real instances, size: 1.5 GB, accessible only for CCT. URL: https://drive.google.com/file/d/1lo0kCdH-3hu5-llI-_ZImVbEVUmoaZI_/.

— (July 2019b). Petrobras/3W: The first repository published by Petrobras on Github. Accessed: 2023-05-04. URL: https://github.com/petrobras/3W#3w-toolkit.

Vargas, Ricardo Emanuel Vaz et al. (July 2019). A realistic and public dataset with rare undesirable real events in oil wells. URL: https://www.sciencedirect.com/science/article/pii/S0920410519306357.

Venkatasubramanian, Venkat et al. (2003). "A review of process fault detection and diagnosis". In: Computers & Eamp; Chemical Engineering 27.3, pp. 293–311. DOI: 10.1016/s0098-1354(02)00160-6.

Yocum, B.T. (1973). "Offshore riser slug flow avoidance: Mathematical models for design and optimization". In: *All Days.* DOI: 10.2118/4312-ms.